



PRICE LIST – OLOFSFORS TRACKS

2021-04-01 – SEK



www.olofsfors.com

August 2021 v.4

Table of Contents

Table of content	2
Benefits with using ECO-TRACKS™	3
Choose the right track for your machine	4
ECO-TRACKS™ components and description	8
Order information	10
EX™	12
OF™	16
EVO™	22
ECO™	30
KovaX™	34
Combination-OF-Baltic™	40
Combination-ECO-Baltic™	42
Combination-EVO-Baltic™ and others	44
U™	48
Baltic™	52
CoverX™	60
Long bogie™	64
Conventional tracks™	72
CTL Wheel track™	74
Skidder Wheel track™	80
PRO-Grip™	82
Parts	92
Link & Link hooks	98
Contacts	100
Welding Instruction	102
Mounting Instruction	104
Track Shortening Instruction	108
Manufacturing	110

Benefits with using ECO-TRACKS™

With Olofsfors ECO-TRACKS™ you can load more and gain better traction while at the same time, cause lower impact in forests and open land. The secret behind the benefits is in the design. Our tracks have a highly placed linkage system and a new generation of cross member with extended and curved ends.


Regardless of the machine you have, the job you need to do and how rough the terrain is, we have a track for you. A track that gives you:

- ▶ lower energy consumption
- ▶ lower ground pressure
- ▶ reduced machine and tyre wear
- ▶ better traction
- ▶ increased load capacity
- ▶ less vibrations

ALLROUND

Our Allround tracks manage just about any conditions. There are tracks for all machine types and sizes, and they are ground and tire friendly


Our Allround tracks: EVO, ECO and KovaX

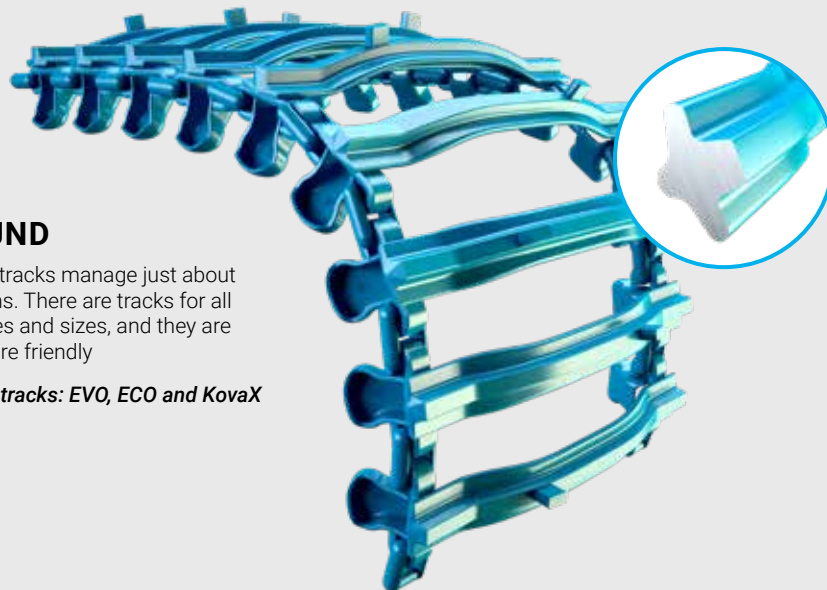

GRIP

Our Grip tracks are the best choice when you need to make your way over steep terrain. Regardless of the terrain you will be operating on, we have a track that makes your machine climb.


Our Grip tracks: EX and OF

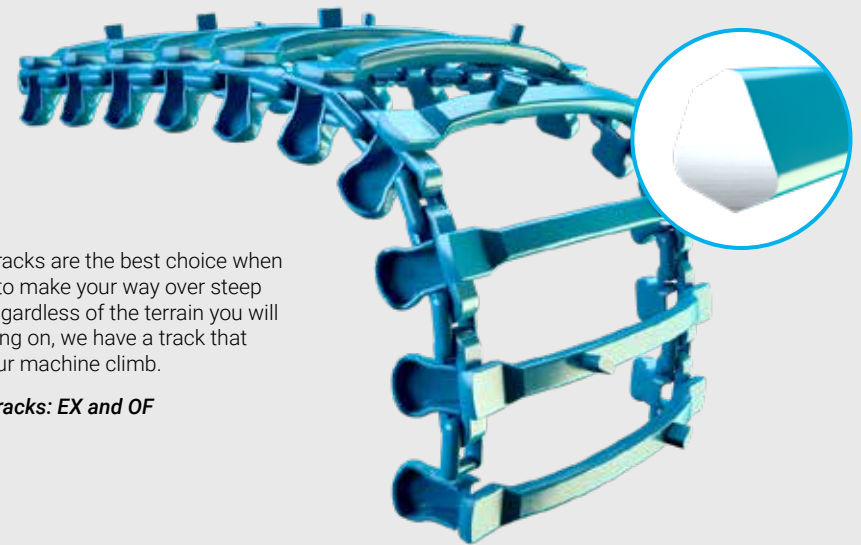

FLOTATION

They give you increased flotation on wet and soft terrain while at the same time, reducing ground disturbance.

Our Flotation tracks: U, Baltic and CoverX

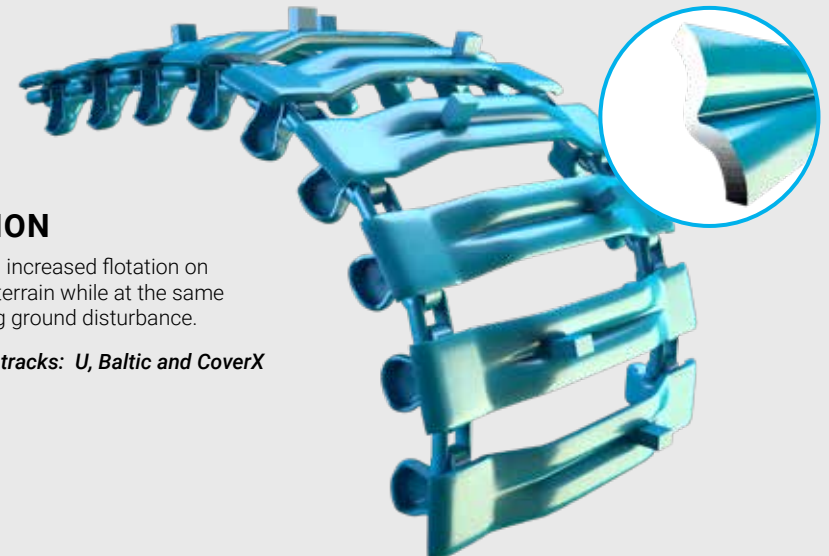

Choose the right track for your machine

1. Profile - Cross Member Families

Cross member

2. Link system

22 – 26 – 29 – 30 – Max

3. Version

Standard, Soft and
Narrow









4. Position

SYM = Symmetric
ASYM = Asymmetric
OSS = One Side Short

5. Cleat

NC = No Cleat
SC = Single Cleat
DC = Double Cleat
RC = Road Cleat

1. Profile

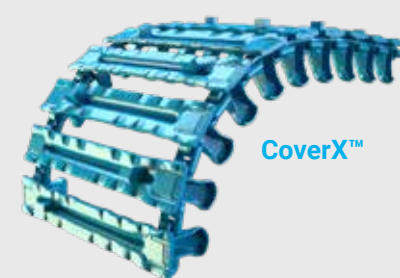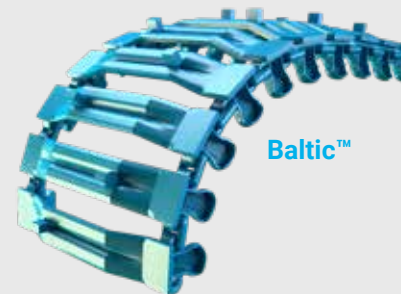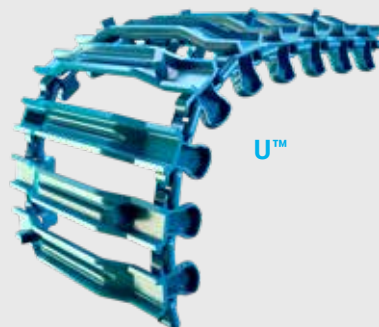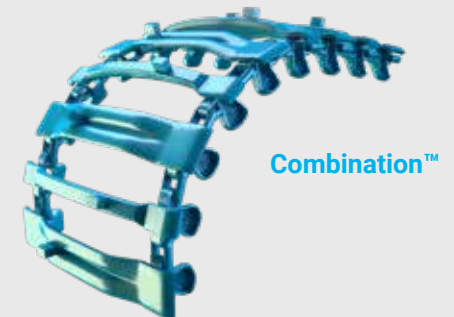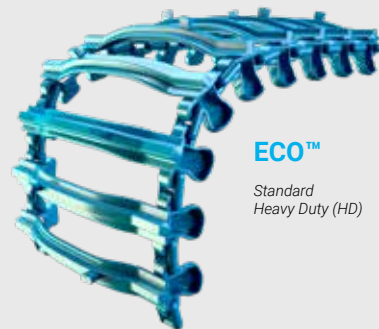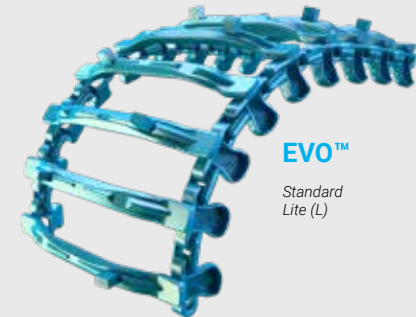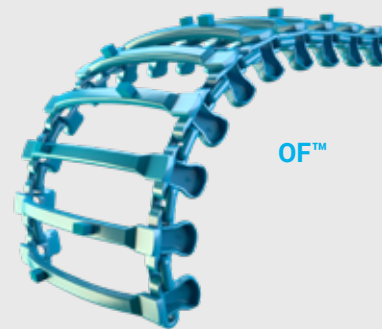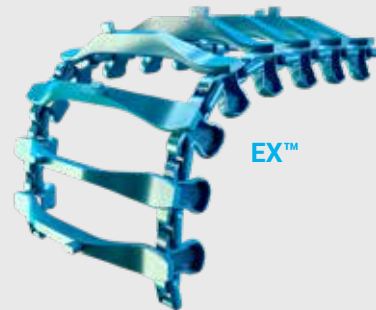


2. Link system



22, 26 & 29 mm


30 mm

Max

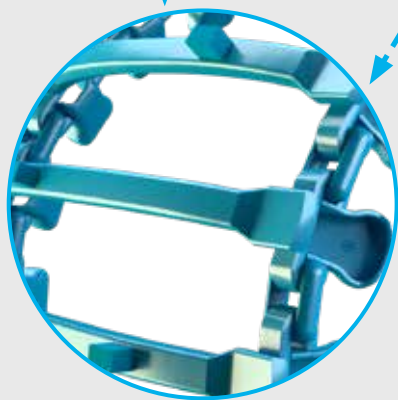


3. Version

STANDARD

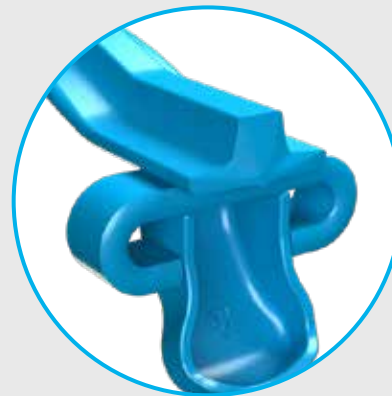

SOFT

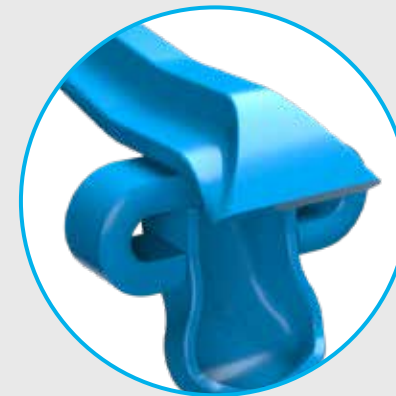

NARROW




WIDE




Choose the right track for your machine

4. Position

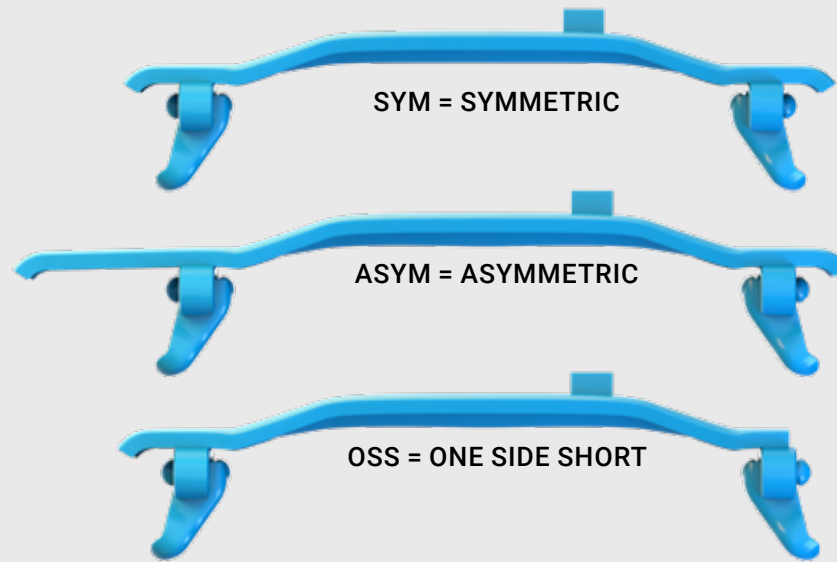

5. Cleat

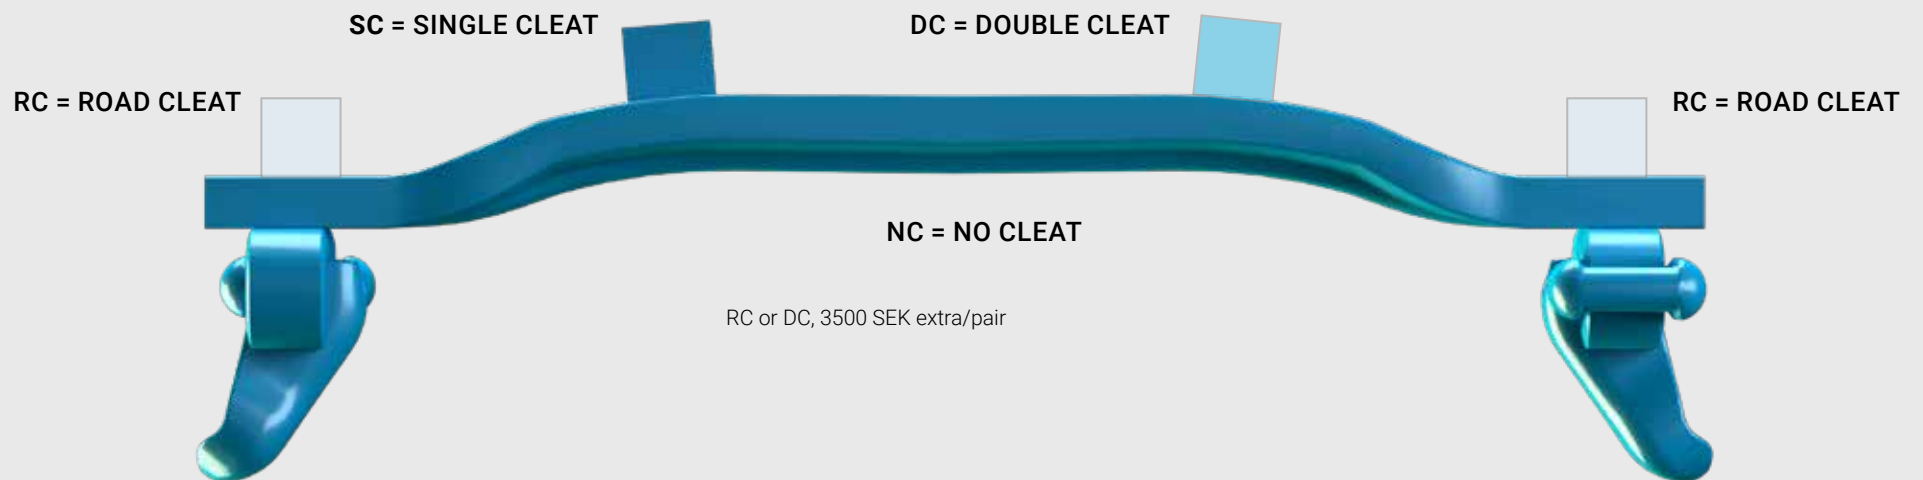

GRIP

Allround


FLOTATION

EX™




1. EX™
2. 22, 26, 29, 30 mm and Max
3. Standard
4. SYM
5. NC, SC, DC and RC

774-960 mm width




OF™

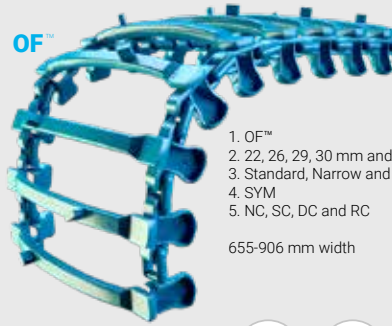

1. OF™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM
5. NC, SC, DC and RC

655-906 mm width




EVO™



1. EVO™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM
5. NC, SC, DC and RC

740-960 mm width




ECO™



1. ECO™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow, Soft and Wide
4. SYM and OSS
5. NC, SC, DC and RC

615-1135 mm width




KovaX™



1. KovaX™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM and OSS
5. NC, SC, DC and RC

680-950 mm width




Combination™



1. EVO-Baltic™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM
5. NC, SC, DC and RC

670-960 mm width




U™




1. U™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM, ASYM and OSS
5. NC, SC, DC and RC

655-971 mm width




Baltic™

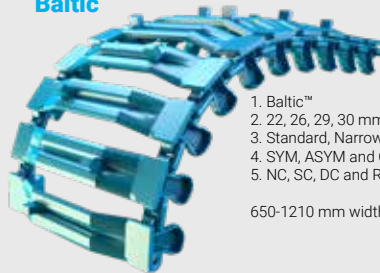


1. Baltic™
2. 22, 26, 29, 30 mm and Max
3. Standard, Narrow and Soft
4. SYM, ASYM and OSS
5. NC, SC, DC and RC

650-1210 mm width




CoverX™

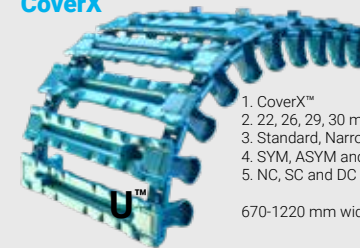

1. CoverX™
2. 22, 26, 29, 30 mm
3. Standard, Narrow and Soft
4. SYM, ASYM and OSS
5. NC, SC and DC

670-1220 mm width



ECO-TRACKS™ components and description

Cleat/stud




LINK

LINK HOOK

CROSS MEMBER


SIDE SUPPORT

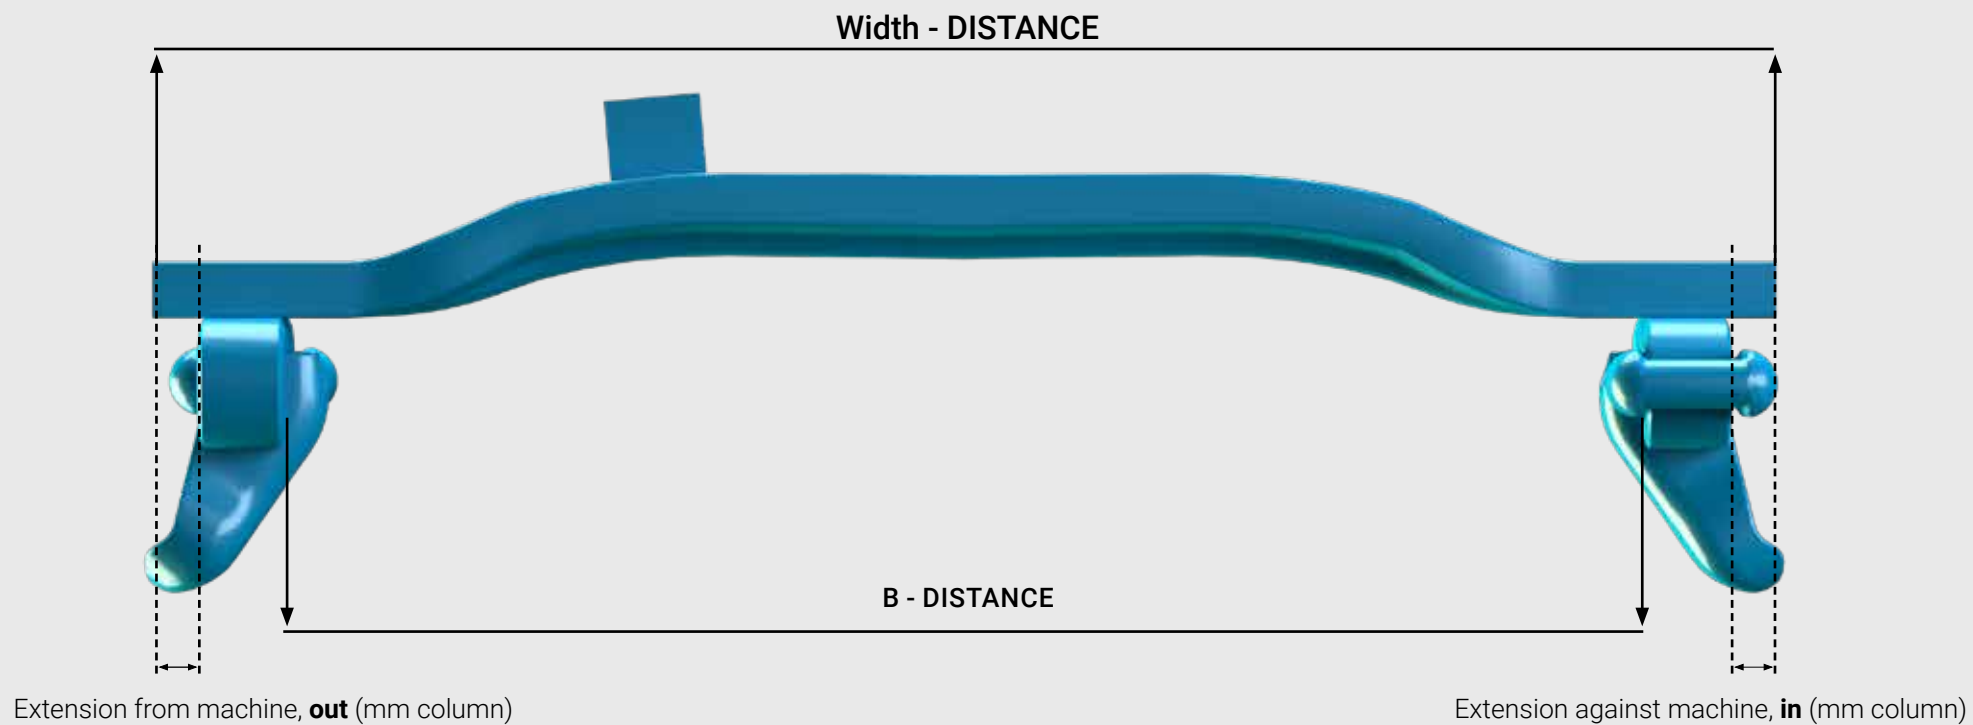

Order information

IMPORTANT ORDER INFORMATION TO GET THE RIGHT TRACK:

1. **Tire dimension**
 2. **Tire brand and model**
 3. **Machine type and model. Check available clearance between tire and frame**
 4. **Ground conditions**
 5. **Type of use**
 6. **Select the correct mounting tool**
- (No 1-3 are required)

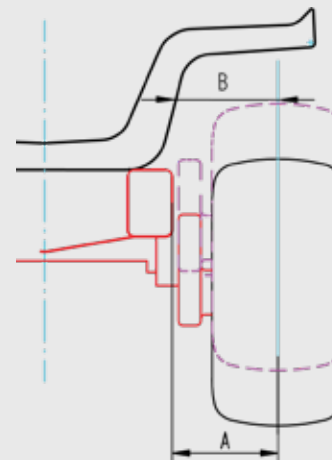

EXPLANATION OF TIRE MODELS IN THIS PUBLICATION

Nokian	Trelleborg	Alliance	Tianli	Firestone	BKT
TRS2+, FR	T404	A331	TiFF	Firestone	
FKF - Forest King F	T421	A342	TiHF	FsB	
FKF2 - Forest King F2	T422	A343	TiFG		
TRS, TRS2	T428	A344			
NM - Norman	T440	A643			
ELS	T480	A644			
LK - Logger King					

RECOMMENDED LINK SYSTEM

Machines/Maximum load	Tire rim size	Link Ø	Link hook mm
Harvesters	22.5	22	15 x 45
Harvesters	24.5	22	15 x 45
Harvesters	26.5	22	15 x 45
Harvesters	28.5	22	15 x 45
Forwarder 8 - 10 ton load	22.5	22	15 x 45
Forwarder 10 - 12 ton load	24.5, 26.5	22	15 x 45
Forwarder 10 - 15 ton load	24.5, 26.5	26 / 29	20 x 45 / 22 x 50
Forwarder 14 - 20 ton load	26.5, 28.5	26 / 29 / Max	20 x 45 / 22 x 50 / 20 x 45
Forwarder 18+ ton load	26.5, 28.5	29 / 30 / Max	20 x 50 / 30 x 50 / 20 x 45

Order and delivery information

Prices are without VAT, freight and packing material.

The price list is valid until further notice. All Track prices are for one (1) pair/set and includes track locks. **The mounting tool is purchased separately.** See mounting instruction at www.olofsfors.com, search in our video library <http://www.olofsfors.com/en/video-library/?Language=English&Product+Segment=Tracks>

Olofsfors has two different product categories; stock products and non stock products.

Stock Products:

Delivery time within two (2) work days. Olofsfors factory stock products are marked with **blue** text. Local stock in Germany, Canada, Finland and Russia may vary, please contact each sales office for information.

Non Stock Products:

Delivery time of fifteen (15) work days after order or less.

Custom made track models will be quoted on request, approximately four (4) weeks delivery.

Terms of payment are normally 30 days net. Any remarks to the invoice must be made within 8 days after invoice date. Payment must be received on our account no later than due date. If not, interest can be charged based on applicable reference rate plus 8 percent.

Olofsfors AB

Phone: +46 930-311 40

E-mail: order@olofsfors.se

Olofsfors Inc

Phone: +1 519 754 2190

Fax: +1 519 757 1100

E-mail: info@olofsfors.com

Olofsfors LLC

Phone: +7 921 790 33 03

E-mail: info.ru@olofsfors.com

Metsätyö OY Jyväskylä

Phone: +358 14 338 8700

E-mail: info@metsatyo.fi



Track Shipping

Tracks are normally shipped in 4 rolls on one or two pallets. The joining track locks, short, medium, long (8+4+4) are mounted on the ends of the rolls.

For every set of tracks you will need the correct tightening/tensioning tool. Olofsfors have different types to offer. Please ensure that you have the right tool for your tracks. See page 94.

Olofsfors GmbH

Phone: +49 7033 32043 10

E-mail: order.gmbh@olofsfors.de

Olofsfors South America

Phone: +55 11 97373 0201

E-mail: alex.lambert@olofsfors.com

Metsätyö OY Hämeenlinna


Phone: +358 3 644 0400

E-mail: info@metsatyo.fi

Metsätyö OY Rovaniemi

Phone: +358 16 321 0100

E-mail: info@metsatyo.fi

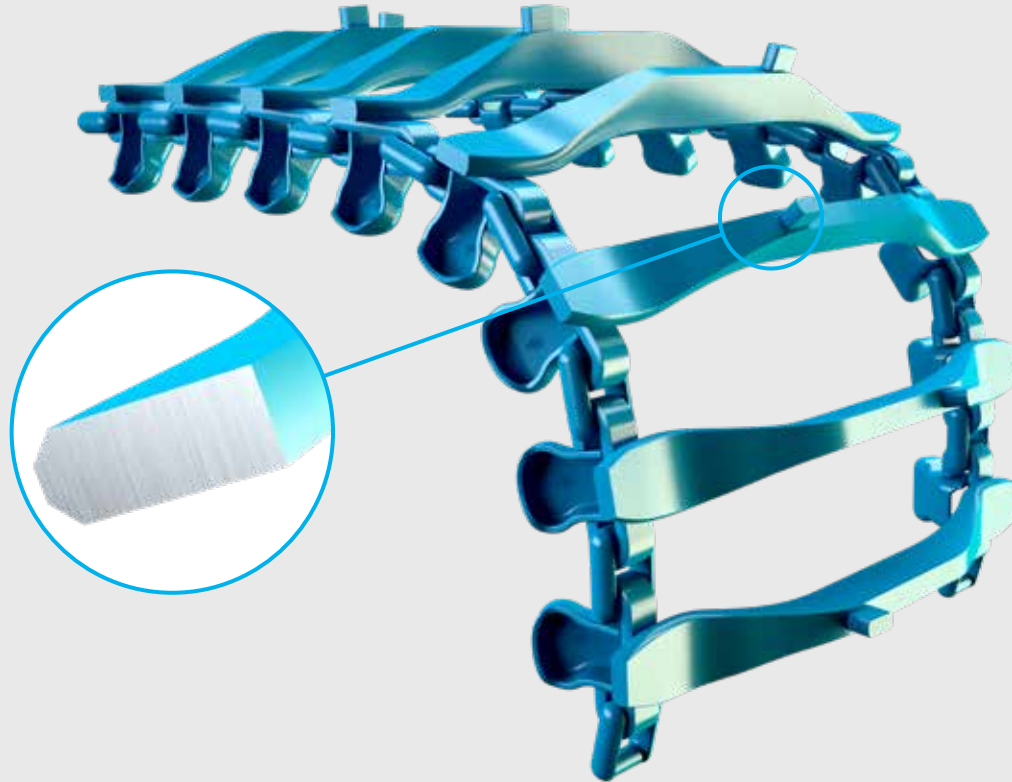

**NARROW CROSS
MEMBER**



GRIP



FLOTATION



SNOW



**STANDARD CROSS
MEMBER**



GRIP



FLOTATION



SNOW

EX 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EX Narrow												
190-661026	EX	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	774	1 430	SC	0	0	435	77 700
190-644021	EX	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	774	1 500	SC	0	0	425	91 400
190-644026	EX	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	774	1 500	SC	0	0	435	89 700
EX Standard												
190-624422	EX	Standard	SYM	600-26.5	T422	774	1 500	SC	27	27	387	92 600
190-624040	EX	Standard	SYM	600-26.5	FKF2, FR, T428, A343	774	1 500	SC	43	43	387	90 600
190-624045	EX	Standard	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	630	1 500	SC	27	27	390	91 400
190-662720	EX	Standard	SYM	650-24.5	FR, A342, A344	774	1 430	SC	18	18	400	87 200
190-652045	EX	Standard	SYM	710-22.5	TRS, TRS2, T428, A344	866	1 300	SC	23	23	440	81 500
190-661020	EX	Standard	SYM	710-24.5	FKF, FKF2, A343	866	1 430	SC	38	38	438	90 700
190-644422	EX	Standard	SYM	710-26.5	T422	866	1 500	SC	18	18	433	97 700
190-644027	EX	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	866	1 500	DC	28	28	435	97 700
190-644025	EX	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	866	1 500	SC	28	28	435	95 100
190-644020	EX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	866	1 500	SC	38	38	433	94 400
190-680000	EX	Standard	SYM	710-28.5	FKF2	866	1 720	SC	38	38	433	108 200

EX 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EX Narrow												
290-644726	EX	Narrow	SYM	710-26.5	TRS2 Only	774	1 500	SC	0	0	404	98 200
EX Standard												
290-624020	EX	Standard	SYM	600-26.5	FKF	774	1 500	SC	48	48	387	103 000
290-624045	EX	Standard	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	774	1 500	SC	27	27	390	103 000
290-653040	EX	Standard	SYM	650-26.5	ELS, TRS, A343, A344	774	1 500	SC	37	37	387	106 400
290-653030	EX	Standard	SYM	650-26.5	TiFF	774	1 720	SC	12	12	405	106 400
290-644422	EX	Standard	SYM	710-26.5	T422	866	1 500	SC	23	23	433	106 400
290-644020	EX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	866	1 500	SC	33	33	433	103 200
290-644025	EX	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	866	1 500	SC	26	26	438	105 100
290-680025	EX	Standard	SYM	710-28.5	TRS2, A644	866	1 720	SC	28	28	435	116 000
290-680020	EX	Standard	SYM	710-28.5	FKF2	866	1 720	SC	38	38	433	117 500
290-654071	EX	Standard	SYM	750-26.5	A643, T480	905	1 720	SC	38	38	453	120 600

Only single cleat in price list, more options available

EX 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EX Standard												
290-654083	EX	Standard	SYM	750-26.5	FKF2	905	1 720	SC	18	18	465	120 800
290-654080	EX	Standard	SYM	750-26.5	FKF2	905	1 720	SC	18	18	465	123 800
290-654070	EX	Standard	SYM	750-26.5	A643, T480	866	1 720	SC	18	18	445	116 700
290-654000	EX	Standard	SYM	750-26.5	FKF, TRS, A343, A344	866	1 720	SC	33	33	433	113 200
290-654060	EX	Standard	SYM	750-26.5	T428	866	1 720	SC	23	23	440	116 700
290-654060	EX	Standard	SYM	750-30.5	T428	866	1 720	SC	23	23	440	116 700
290-663000	EX	Standard	SYM	750-26.5	TRS2	905	1 720	SC	28	28	455	123 800
290-663000	EX	Standard	SYM	780-26.5	FKF	905	1 720	SC	28	28	455	123 800
290-663001	EX	Standard	SYM	750-26.5	TRS2	866	1 720	SC	8	8	455	121 800
290-663001	EX	Standard	SYM	780-26.5	FKF	866	1 720	SC	8	8	455	121 800
290-673000	EX	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	960	1 720	SC	50	50	480	131 300
290-656020	EX	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	960	1 500	SC	30	30	480	113 500

EX 29 MM LINK SYSTEM


Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EX Standard												
590-644020	EX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	866	1 500	SC	33	33	433	115 600
590-654080	EX	Standard	SYM	750-26.5	FKF2	905	1 720	SC	18	18	465	138 700
590-654000	EX	Standard	SYM	750-26.5	FKF, TRS, A343, A344	866	1 720	SC	33	33	433	130 200
590-673000	EX	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	905	1 720	SC	23	23	460	141 800

EX 30 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EX Standard												
490-644020	EX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	866	1 500	SC	33	33	436	126 000
490-654000	EX	Standard	SYM	750-26.5	FKF, TRS, A343, A344	866	1 720	SC	33	33	436	142 500
490-654080	EX	Standard	SYM	750-26.5	FKF2	905	1 720	SC	18	18	471	143 700
490-663000	EX	Standard	SYM	750-26.5	TRS2	866	1 720	SC	8	8	461	141 100
490-663000	EX	Standard	SYM	780-26.5	FKF	866	1 720	SC	8	8	461	141 100
490-673000	EX	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	960	1 720	SC	51	51	480	161 100
490-656020	EX	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	960	1 500	SC	35	35	486	133 600



Only single cleat in price list, more options available

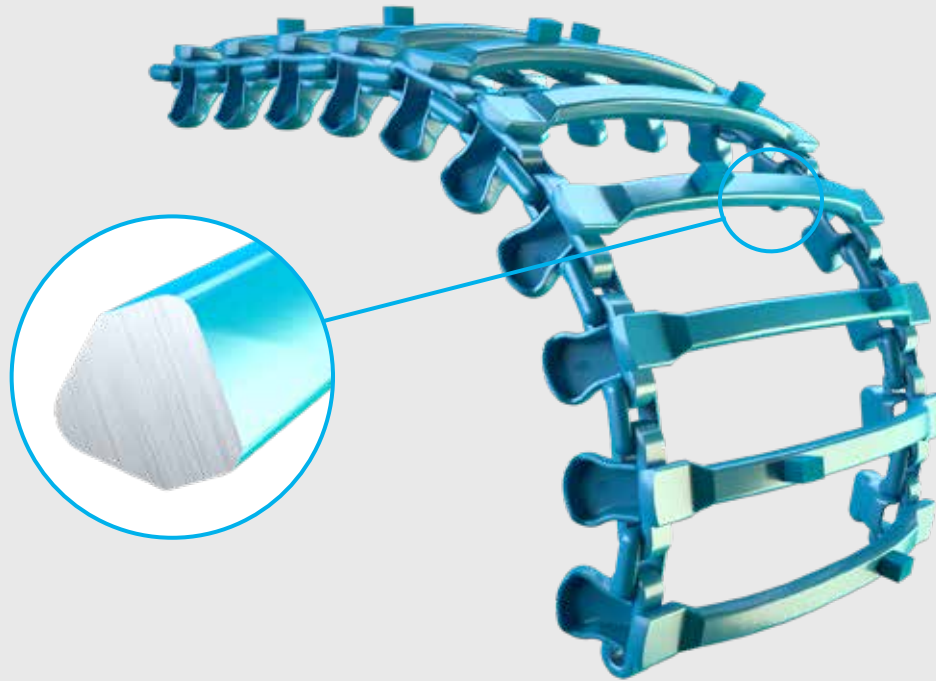

**NARROW CROSS
MEMBER**



GRIP



FLOTATION



SNOW



**STANDARD CROSS
MEMBER**



GRIP



FLOTATION



SNOW



M (STD)



GRIP



FLOTATION



SNOW



M-SOFT



GRIP



FLOTATION



SNOW



M-NARROW



GRIP



FLOTATION



SNOW

OF 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
OF Narrow												
095-670025	OF	Narrow	SYM	600-24.5	TRS2	680	1 430	SC	0	0	355	75 600
095-652040	OF	Narrow	SYM	710-22.5	FKF, A331, A343	770	1 300	SC	0	0	425	75 700
095-652020	OF	Narrow	SYM	710-22.5	FKF2, A643, A644	770	1 300	SC	0	0	430	75 700
095-661021	OF	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	770	1 430	SC	0	0	425	75 500
095-661026	OF	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	770	1 430	SC	0	0	435	81 500
OF Standard												
095-616040	OF	Standard	SYM	500-22.5	T421	655	1 300	SC	23	23	327	66 500
095-616000	OF	Standard	SYM	500-22.5	A328	655	1 100	SC	23	23	335	56 200
095-640115	OF	Standard	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	725	1 300	SC	8	8	385	71 300
095-640111	OF	Standard	SYM	600-22.5	ELS, T404, T423	725	1 300	SC	18	18	375	71 300
095-670000	OF	Standard	SYM	600-24.5	FR	725	1 430	SC	18	18	375	74 100
095-624045	OF	Standard	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	725	1 500	SC	8	8	385	80 500
095-624040	OF	Standard	SYM	600-26.5	FKF2, FR, T428, A343	725	1 500	SC	18	18	375	79 400
095-624020	OF	Standard	SYM	600-26.5	FKF	725	1 500	SC	28	28	365	79 400
095-653020	OF	Standard	SYM	650-26.5	ELS, TRS, A343, A344	725	1 720	SC	18	18	375	89 300
095-652021	OF	Standard	SYM	710-22.5	FKF2	840	1 300	SC	20	20	430	74 300
095-652045	OF	Standard	SYM	710-22.5	TRS, TRS2, T428, A344	850	1 300	SC	25	25	430	74 800
095-661025	OF	Standard	SYM	710-24.5	TRS2, T428, T440, T480, A344	840	1 430	SC	15	15	435	80 500
095-661020	OF	Standard	SYM	710-24.5	FKF, FKF2, A343, A644	840	1 430	SC	25	25	425	80 500
095-644422	OF	Standard	SYM	710-26.5	T422	850	1 500	SC	10	10	445	84 200
095-644025	OF	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	840	1 500	SC	15	15	435	84 200
095-644020	OF	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1 500	SC	25	25	425	83 800
095-644040	OF	Standard	SYM	710-26.5	Firestone, BKT	800	1 500	SC	25	25	405	89 300
095-654000	OF	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	20	20	430	94 300
095-654060	OF	Standard	SYM	750-26.5	T428	850	1 720	SC	20	20	435	97 200
095-654060	OF	Standard	SYM	750-30.5	T428	850	1 720	SC	20	20	435	97 200

OF 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
OF Narrow												
295-670025	OF	Narrow	SYM	600-24.5	TRS2	680	1 430	SC	0	0	340	82 800
295-624041	OF	Narrow	SYM	600-26.5	FKF2, FR, T428, A343	655	1 500	SC	0	0	375	83 400

Only single cleat in price list, more options available

OF 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
OF Narrow												
295-661022	OF	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	780	1 430	SC	0	0	425	86 600
295-644021	OF	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	770	1 500	SC	0	0	430	92 700
295-644027	OF	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	780	1 500	SC	0	0	435	93 300
295-654080	OF	Narrow	SYM	750-26.5	FKF2	840	1 720	SC	0	0	465	103 000
295-663000	OF	Narrow	SYM	750-26.5	TRS2	820	1 720	SC	0	0	455	101 400
295-663000	OF	Narrow	SYM	780-26.5	FKF	820	1 720	SC	0	0	455	101 400
295-673000	OF	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	840	1 720	SC	0	0	465	103 000
OF Standard												
295-624045	OF	Standard	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	750	1 500	SC	20	20	385	90 200
295-624042	OF	Standard	SYM	600-26.5	FKF2, FR, T428, A343	750	1 500	SC	30	30	375	91 800
295-624040	OF	Standard	SYM	600-26.5	FKF2, FR, T428, A343	750	1 500	SC	30	30	375	89 300
295-624020	OF	Standard	SYM	600-26.5	FKF	725	1 500	SC	28	28	365	89 300
295-653020	OF	Standard	SYM	650-26.5	ELS, TRS, A343, A344	725	1 720	SC	18	18	375	98 700
295-653030	OF	Standard	SYM	650-26.5	TiFF	770	1 720	SC	10	10	405	103 000
295-661025	OF	Standard	SYM	710-24.5	TRS2, T428, T440, T480, A344	840	1 430	SC	10	10	440	90 300
295-644422	OF	Standard	SYM	710-26.5	T422	850	1 500	SC	15	15	425	95 800
295-644020	OF	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1 500	SC	20	20	430	94 000
295-644025	OF	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	850	1 500	SC	20	20	435	95 800
295-644041	OF	Standard	SYM	710-26.5	Firestone, BKT	840	1 500	SC	25	25	425	94 000
295-680025	OF	Standard	SYM	710-28.5	TRS2, A644	850	1 720	SC	20	20	435	110 100
295-654040	OF	Standard	SYM	710-30.5	T428	820	1 720	SC	20	20	420	102 700
295-654000	OF	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	20	20	430	103 000
295-663000	OF	Narrow	SYM	750-26.5	TRS2	820	1 720	SC	0	0	455	101 400
295-663000	OF	Narrow	SYM	780-26.5	FKF	820	1 720	SC	0	0	455	101 400

OF 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
OF Soft												
295-644032	OF	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1 520	SC	53	53	453	92 300

OF 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
OF Narrow												
595-644021	OF	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	770	1 500	SC	0	0	430	103 800
595-654080	OF	Narrow	SYM	750-26.5	FKF2	840	1 720	SC	0	0	418	115 400
595-673000	OF	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	840	1 720	SC	0	0	465	115 400
OF Standard												
595-644020	OF	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1 500	SC	20	20	430	105 300
595-654000	OF	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	20	20	430	115 400

OF 30 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
OF Standard												
495-654000	OF	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	20	20	436	133 600
OF Soft												
495-644020	OF	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1 500	SC	53	53	453	120 400


OF MAX LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
OF Narrow												
395-661020	OF	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	770	1 430	SC	0	0	419	115 100
395-644026	OF	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	800	1 500	SC	0	0	429	121 800
395-654081	OF	Narrow	SYM	750-26.5	FKF2	840	1 720	SC	0	0	454	133 700
395-663000	OF	Narrow	SYM	750-26.5	TRS2	820	1 720	SC	0	0	444	139 100
395-663000	OF	Narrow	SYM	780-26.5	FKF	820	1 720	SC	0	0	444	139 100
395-673000	OF	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	840	1 720	SC	0	0	454	144 900


OF MAX LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
OF Standard												
395-670025	OF	Standard	SYM	600-24.5	TRS2	750	1 430	SC	15	15	382	115 500
395-624000	OF	Standard	SYM	600-26.5	FKF2, FR, T428, A343	725	1 500	SC	13	13	369	122 500
395-661025	OF	Standard	SYM	710-24.5	TRS2, T428, T440, T480, A344	840	1 430	SC	10	10	429	116 100
395-644000	OF	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1 500	SC	20	20	420	123 100
395-654041	OF	Standard	SYM	710-30.5	T428	840	1 720	SC	30	30	420	136 500
395-654000	OF	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	15	15	424	136 500
OF Soft												
395-661000	OF	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	906	1 430	SC	58	58	453	123 800
395-644025	OF	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	906	1 500	SC	48	48	453	131 900
395-644020	OF	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1 500	SC	58	58	453	129 300
395-680020	OF	Soft	SYM	710-28.5	FKF2	906	1 720	SC	53	53	453	148 100
395-654040	OF	Soft	SYM	710-30.5	T428	906	1 720	SC	68	68	453	139 100
395-654020	OF	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1 720	SC	53	53	453	139 100
395-654050	OF	Soft	SYM	750-26.5	T428	906	1 720	SC	43	43	453	146 700
395-654050	OF	Soft	SYM	750-30.5	T428	906	1 720	SC	43	43	453	146 700




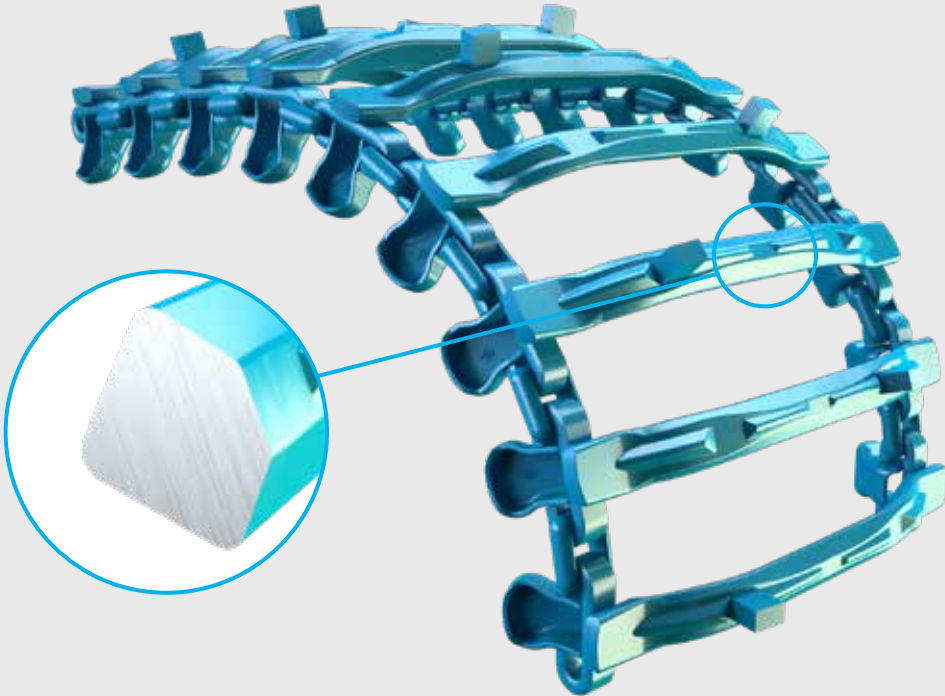


**NARROW CROSS
MEMBER**




**STANDARD CROSS
MEMBER**




**SOFT CROSS
MEMBER**



M (STD)



M-SOFT



EVO 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EVO Narrow												
094-670026	EVO	Narrow	SYM	600-24.5	TRS2	695	1 430	SC	0	0	360	75 000
094-652020	EVO	Narrow	SYM	710-22.5	FKF2, A643, A644	775	1 300	SC	0	0	430	76 400
094-652040	EVO	Narrow	SYM	710-22.5	FKF, A331, A343	775	1 300	SC	0	0	425	76 400
094-652045	EVO	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	800	1 300	SC	0	0	440	77 700
094-661020	EVO	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	775	1 430	SC	0	0	425	81 500
094-661025	EVO	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	775	1 430	SC	0	0	435	81 500
094-644022	EVO	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	775	1 500	SC	0	0	430	86 900
094-644025	EVO	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	800	1 500	SC	0	0	440	89 300
094-654000	EVO	Narrow	SYM	750-26.5	FKF, TRS, A343, A344	775	1 720	SC	0	0	430	99 800
EVO Standard												
094-640115	EVO	Standard	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	740	1 300	SC	10	10	390	73 500
094-640020	EVO	Standard	SYM	600-22.5	ELS, T404, T423	740	1 300	SC	20	20	380	73 500
094-624422	EVO	Standard	SYM	600-26.5	T422	775	1 500	SC	23	23	395	85 600
094-624045	EVO	Standard	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	775	1 500	SC	28	28	390	85 600
094-624040	EVO	Standard	SYM	600-26.5	FKF2, FR, T428, A343	740	1 500	SC	20	20	380	85 600
094-624020	EVO	Standard	SYM	600-26.5	FKF	740	1 500	SC	30	30	370	85 600
094-653080	EVO	Standard	SYM	620-30.5	T428	775	1 720	SC	33	33	388	99 600
094-653041	EVO	Standard	SYM	650-26.5	ELS, TRS, A343, A344	740	1 720	SC	20	20	380	97 900
094-674000	EVO	Standard	SYM	700-26	BEL 194	800	1 500	SC	25	25	405	90 700
094-644020	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1 500	SC	20	20	430	86 900
094-644422	EVO	Standard	SYM	710-26.5	T422	870	1 500	SC	23	23	435	93 100
EVO Soft												
094-652041	EVO	Soft	SYM	710-22.5	FKF, A331, A343	906	1 300	SC	58	58	453	83 900
094-644026	EVO	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	906	1 500	SC	43	43	453	96 400
094-644021	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1 500	SC	53	53	453	96 400
094-680000	EVO	Soft	SYM	710-28.5	FKF2	906	1 720	SC	58	58	453	107 700

EVO 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EVO Narrow												
294-624041	EVO	Narrow	SYM	600-26.5	FKF2, FR, T428, A343	695	1 500	SC	0	0	380	87 900
294-653030	EVO	Narrow	SYM	650-26.5	TiFF	740	1 720	SC	0	0	405	108 800
294-652040	EVO	Narrow	SYM	710-22.5	FKF, A331, A343	775	1 300	SC	0	0	425	84 000
294-661020	EVO	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	775	1 430	SC	0	0	430	90 500
294-644022	EVO	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	775	1 500	SC	0	0	430	95 100
294-644026	EVO	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	800	1 500	SC	0	0	440	95 100
294-644040	EVO	Narrow	SYM	710-26.5	Firestone, BKT	740	1 500	SC	0	0	408	97 700
294-680026	EVO	Narrow	SYM	710-28.5	FKF2	800	1 720	SC	0	0	435	113 200
294-680001	EVO	Narrow	SYM	710-28.5	FKF2	775	1 720	SC	0	0	425	111 900
294-654040	EVO	Narrow	SYM	710-30.5	T428	750	1 720	SC	0	0	420	108 000
294-673002	EVO	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	850	1 720	SC	0	0	465	115 000
294-656731	EVO	Narrow	SYM	800-26.5	TRS2, A344	884	1 500	SC	0	0	485	105 100
EVO Standard												
294-624040	EVO	Standard	SYM	600-26.5	FKF2, FR, T428, A343	740	1 500	SC	20	20	380	91 500
294-624020	EVO	Standard	SYM	600-26.5	FKF	740	1 500	SC	30	30	370	91 500
294-653040	EVO	Standard	SYM	650-26.5	ELS, TRS, A343, A344	740	1 720	SC	20	20	380	107 600
294-674000	EVO	Standard	SYM	700-26	BEL 194	800	1 500	SC	25	25	405	101 300
294-652020	EVO	Standard	SYM	710-22.5	FKF2, A643, A644	840	1 300	SC	20	20	430	84 600
294-661025	EVO	Standard	SYM	710-24.5	TRS2, T428, T440, T480, A344	840	1 430	SC	10	10	440	90 500
294-661022	EVO	Standard	SYM	710-24.5	FKF, FKF2, A343, A644	840	1 430	SC	20	20	430	90 500
294-644028	EVO	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	840	1 500	SC	10	10	440	99 300
294-644020	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1 500	SC	20	20	425	95 100
294-644422	EVO	Standard	SYM	710-26.5	T422	870	1 500	SC	25	25	435	101 300
294-654080	EVO	Standard	SYM	750-26.5	FKF2	915	1 720	SC	25	25	465	113 500
294-654000	EVO	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	20	20	430	107 300
294-654070	EVO	Standard	SYM	750-26.5	T480, A643	870	1 720	SC	20	20	445	113 400
294-654060	EVO	Standard	SYM	750-26.5	T428	870	1 720	SC	25	25	440	113 200
294-654060	EVO	Standard	SYM	750-30.5	T428	870	1 720	SC	25	25	440	113 200
294-663000	EVO	Standard	SYM	750-26.5	TRS2	884	1 720	SC	20	20	455	113 500
294-663000	EVO	Standard	SYM	780-26.5	FKF	884	1 720	SC	20	20	455	113 500

EVO 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EVO Standard												
294-673000	EVO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	915	1 720	SC	25	25	465	115 700
294-656021	EVO	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	915	1 500	SC	15	15	480	108 000
EVO Soft												
294-644021	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1 500	SC	55	55	453	101 300
294-644023	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	960	1 500	SC	80	80	480	105 300
294-644025	EVO	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	906	1 500	SC	43	43	453	101 300
294-680027	EVO	Soft	SYM	710-28.5	TRS2, A644	906	1 720	SC	50	50	453	120 400
294-680000	EVO	Soft	SYM	710-28.5	FKF2	906	1 720	SC	60	60	453	115 100
294-654081	EVO	Soft	SYM	750-26.5	FKF2	960	1 720	SC	45	45	480	118 200
294-654020	EVO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1 720	SC	55	55	453	113 200
294-663001	EVO	Soft	SYM	750-26.5	TRS2	960	1 720	SC	55	55	480	118 200
294-663001	EVO	Soft	SYM	780-26.5	FKF	960	1 720	SC	55	55	480	118 200
294-673001	EVO	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	960	1 720	SC	45	45	480	120 600
294-656030	EVO	Soft	SYM	800-26.5	TRS2, A344	960	1 500	SC	20	20	490	111 300
294-656020	EVO	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	960	1 500	SC	30	30	480	111 200
294-677000	EVO	Soft	SYM	870-26.5	A344	960	1 500	SC	15	15	498	117 500

EVO 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EVO Narrow												
594-644022	EVO	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	775	1 500	SC	0	0	430	106 600
594-673002	EVO	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	850	1 720	SC	0	0	465	129 200
EVO Standard												
594-680001	EVO	Standard	SYM	710-28.5	FKF2	840	1 720	SC	25	25	425	125 400
594-654000	EVO	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	20	20	430	120 200
594-654080	EVO	Standard	SYM	750-26.5	FKF2	915	1 720	SC	23	23	465	127 200
594-673000	EVO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	915	1 720	SC	23	23	465	131 300
594-644020	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1 500	SC	20	20	430	110 300
594-663000	EVO	Standard	SYM	750-26.5	TRS2	884	1 720	SC	17	17	455	127 200
594-663000	EVO	Standard	SYM	780-26.5	FKF	884	1 720	SC	17	17	455	127 200

Only single cleat in price list, more options available

EVO 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EVO Soft												
594-654081	EVO	Soft	SYM	750-26.5	FKF2	960	1 720	SC	45	45	480	132 500
594-654020	EVO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1 720	SC	53	53	453	126 800
594-673001	EVO	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	960	1 720	SC	45	45	480	135 100

EVO 30 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EVO Standard												
494-674000	EVO	Standard	SYM	700-26	BEL 194	775	1 500	SC	15	15	408	136 200
494-644021	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1 500	SC	20	20	436	129 500
494-654080	EVO	Standard	SYM	750-26.5	FKF2	915	1 720	SC	28	28	466	151 100
494-654060	EVO	Standard	SYM	750-26.5	T428	915	1 720	SC	45	45	458	145 500
494-654060	EVO	Standard	SYM	750-30.5	T428	915	1 720	SC	45	45	458	145 500
494-673000	EVO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	915	1 720	SC	23	23	471	151 100
EVO Soft												
494-644020	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1 500	SC	53	53	453	134 400
494-654000	EVO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1 720	SC	53	53	453	145 500
494-654081	EVO	Soft	SYM	750-26.5	FKF2	960	1 720	SC	45	45	480	154 800

EVO MAX LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EVO Narrow												
394-661021	EVO	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	800	1 430	SC	0	0	424	118 300
394-644021	EVO	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	775	1 500	SC	0	0	419	123 900
394-654083	EVO	Narrow	SYM	750-26.5	FKF2	850	1 720	SC	0	0	457	138 600
394-673001	EVO	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	850	1 720	SC	0	0	454	146 700

EVO MAX LINK SYSTEM


Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EVO Standard												
394-640020	EVO	Standard	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	775	1 300	SC	22	22	388	104 600
394-624040	EVO	Standard	SYM	600-26.5	FKF2, FR, T428, A343	740	1 500	SC	15	15	374	122 500
394-652021	EVO	Standard	SYM	710-22.5	TRS, TRS2, T428, A344	840	1 300	SC	10	10	429	110 500
394-644022	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1 500	SC	20	20	420	125 000
394-644026	EVO	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	840	1 500	SC	10	10	429	128 800
394-680001	EVO	Standard	SYM	710-28.5	FKF2	840	1 720	SC	20	20	420	139 700
394-680025	EVO	Standard	SYM	710-28.5	TRS2, A644	840	1 720	SC	15	15	424	139 700
394-654001	EVO	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	15	15	424	134 400
394-654080	EVO	Standard	SYM	750-26.5	FKF2	915	1 720	SC	23	23	458	143 000
394-654060	EVO	Standard	SYM	750-26.5	T428	870	1 720	SC	20	20	435	141 800
394-654060	EVO	Standard	SYM	750-30.5	T428	870	1 720	SC	20	20	435	141 800
394-663000	EVO	Standard	SYM	750-26.5	TRS2	915	1 720	SC	33	33	458	143 100
394-663000	EVO	Standard	SYM	780-26.5	FKF	915	1 720	SC	33	33	458	143 100
394-656000	EVO	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	915	1 500	SC	13	13	464	131 900
EVO Soft												
394-652020	EVO	Soft	SYM	710-22.5	FKF2, A643, A644	906	1 300	SC	53	53	453	111 000
394-661020	EVO	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	906	1 430	SC	48	48	453	127 400
394-644000	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	960	1 500	SC	80	80	480	131 900
394-644020	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1 500	SC	53	53	453	129 900
394-644025	EVO	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	906	1 500	SC	43	43	453	129 900
394-680000	EVO	Soft	SYM	710-28.5	FKF2	906	1 720	SC	53	53	453	144 300

Only single cleat in price list, more options available

EVO MAX LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EVO Soft												
394-654040	EVO	Soft	SYM	710-30.5	T428	906	1 720	SC	57	57	453	144 300
394-654081	EVO	Soft	SYM	750-26.5	FKF2	960	1 720	SC	45	45	480	145 500
394-654000	EVO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1 720	SC	48	48	453	141 800
394-654020	EVO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	960	1 720	SC	75	75	480	144 300
394-663001	EVO	Soft	SYM	750-26.5	TRS2	960	1 720	SC	55	55	480	145 500
394-663001	EVO	Soft	SYM	780-26.5	FKF	960	1 720	SC	55	55	480	145 500
394-673000	EVO	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	960	1 720	SC	45	45	480	148 100
394-656026	EVO	Soft	SYM	800-26.5	TRS2, A344	960	1 500	SC	20	20	480	136 800
394-656001	EVO	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	960	1 500	SC	35	35	480	135 000



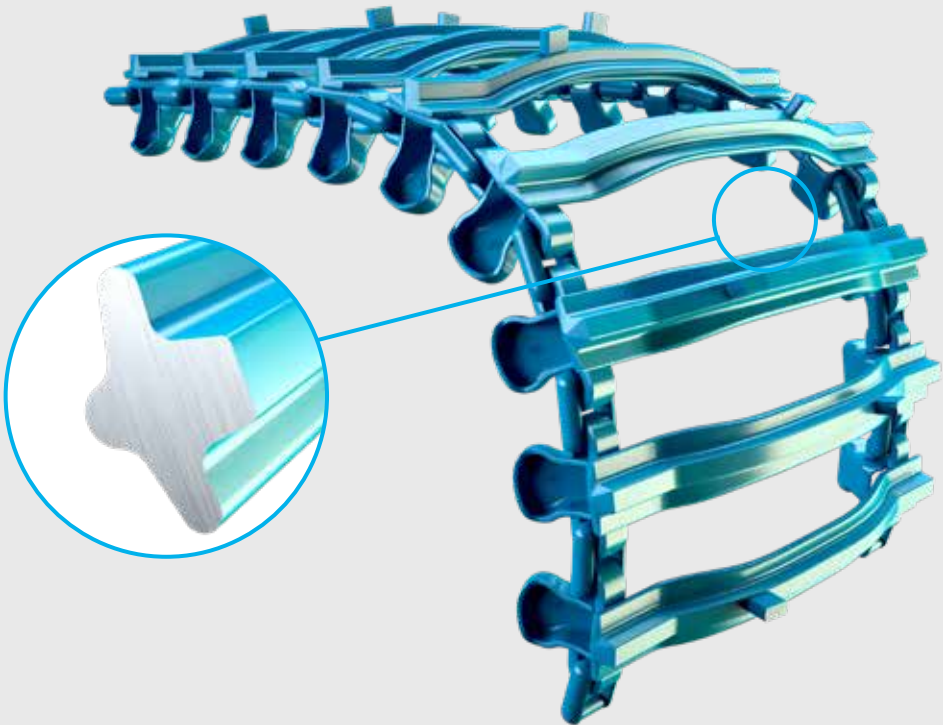

NARROW CROSS MEMBER



GRIP FLOTATION SNOW



STANDARD CROSS MEMBER



GRIP FLOTATION SNOW



SOFT CROSS MEMBER



GRIP FLOTATION SNOW



M-SOFT



GRIP FLOTATION SNOW

ECO 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
ECO Narrow												
097-640111	ECO	Narrow	SYM	600-22.5	ELS, T404, T423	670	1 300	SC	0	0	375	86 400
097-640115	ECO	Narrow	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	670	1 300	SC	0	0	385	86 400
097-624422	ECO	Narrow	SYM	600-26.5	T422	710	1 500	SC	0	0	360	96 900
097-624020	ECO	Narrow	SYM	600-26.5	FKF	670	1 500	SC	0	0	375	90 600
097-624040	ECO	Narrow	SYM	600-26.5	FKF2, FR, T428, A343	670	1 500	SC	0	0	375	90 600
097-624045	ECO	Narrow	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	670	1 500	SC	0	0	385	91 200
097-660020	ECO	Narrow	SYM	650-22.5	T422	745	1 300	SC	0	0	385	90 800
097-652745	ECO	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	778	1 300	SC	0	0	435	87 500
097-652040	ECO	Narrow	SYM	710-22.5	FKF, A331, A343	765	1 300	SC	0	0	420	87 500
097-652020	ECO	Narrow	SYM	710-22.5	FKF2, A643, A644	765	1 300	SC	0	0	430	87 500
097-652045	ECO	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	778	1 300	SC	0	0	435	88 500
097-661020	ECO	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	765	1 430	SC	0	0	425	90 700
097-661025	ECO	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	778	1 430	SC	0	0	430	93 100
097-644020	ECO	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	765	1 500	SC	0	0	425	94 400
097-644025	ECO	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TiFG	778	1 500	SC	0	0	435	97 700
097-644422	ECO	Narrow	SYM	710-26.5	T422	795	1 500	SC	0	0	445	97 700
097-654000	ECO	Narrow	SYM	750-26.5	FKF, TRS, A343, A344	765	1 720	SC	0	0	425	106 500
ECO Standard												
097-670025	ECO	Standard	SYM	600-24.5	TRS2	745	1 430	SC	13	13	373	93 000
097-670000	ECO	Standard	SYM	600-24.5	FR	710	1 430	SC	10	10	375	88 800
097-653041	ECO	Standard	SYM	650-26.5	ELS, TRS, A343, A344	745	1 720	SC	23	23	380	104 000
097-656020	ECO	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	944	1 500	SC	27	27	475	115 400
ECO Soft												
027-652045	ECO	Soft	SYM	710-22.5	TRS, TRS2, T428, A344	916	1 300	SC	58	58	458	98 700
027-652040	ECO	Soft	SYM	710-22.5	FKF, A331, A343	905	1 300	SC	63	63	453	98 700
027-652020	ECO	Soft	SYM	710-22.5	FKF2, A643, A644	905	1 300	SC	58	58	453	98 700
027-661020	ECO	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	916	1 430	SC	68	68	458	107 900
027-644020	ECO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1 500	SC	63	63	453	112 600

ECO 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
ECO Narrow												
297-624045	ECO	Narrow	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	670	1 500	SC	0	0	385	98 500
297-624040	ECO	Narrow	SYM	600-26.5	FKF2, FR, T428, A343	680	1 500	SC	0	0	380	98 500
297-654001	ECO	Narrow	SYM	700-30.5	A331	765	1 720	SC	0	0	425	128 800
297-652040	ECO	Narrow	SYM	710-22.5	FKF, A331, A343	765	1 300	SC	0	0	425	96 400
297-644422	ECO	Narrow	SYM	710-26.5	T422	795	1 500	SC	0	0	445	107 500
297-644025	ECO	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	790	1 500	SC	0	0	440	104 800
297-654040	ECO	Narrow	SYM	710-30.5	T428	745	1 720	SC	0	0	420	113 200
297-654060	ECO	Narrow	SYM	750-26.5	T428	778	1 720	SC	0	0	435	113 200
297-654060	ECO	Narrow	SYM	750-30.5	T428	778	1 720	SC	0	0	435	113 200
297-663001	ECO	Narrow	SYM	750-26.5	TRS2	810	1 720	SC	0	0	455	115 100
297-663001	ECO	Narrow	SYM	780-26.5	FKF	810	1 720	SC	0	0	455	115 100
ECO Standard												
297-624020	ECO	Standard	SYM	600-26.5	FKF	710	1 500	SC	15	15	370	98 800
297-653040	ECO	Standard	SYM	650-26.5	ELS, TRS, A343, A344	760	1 720	SC	30	30	380	110 300
297-652045	ECO	Standard	SYM	710-22.5	TRS, TRS2, T428, A344	850	1 300	SC	15	15	440	98 900
297-661020	ECO	Standard	SYM	710-24.5	FKF, FKF2, A343, A644	850	1 430	SC	25	25	430	100 700
297-661025	ECO	Standard	SYM	710-24.5	TRS2, T428, T440, T480	850	1 430	SC	20	20	430	100 600
297-644040	ECO	Standard	SYM	710-26.5	Firestone, BKT	765	1 500	SC	8	8	405	108 800
297-644020	ECO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TIFF, FsB	850	1 500	SC	25	25	430	103 200
297-644041	ECO	Standard	SYM	710-26.5	Firestone, BKT	850	1 500	SC	30	30	425	108 800
297-680000	ECO	Standard	SYM	710-28.5	FKF2	850	1 720	SC	30	30	425	123 800
297-654041	ECO	Standard	SYM	710-30.5	T428	690	1 720	SC	15	15	420	119 700
297-654000	ECO	Standard	SYM	750-26.5	FKF, TRS, A343, A344	850	1 720	SC	30	30	425	113 200
297-654070	ECO	Standard	SYM	750-26.5	A643, T480	850	1 720	SC	10	10	445	118 100
297-654080	ECO	Standard	SYM	750-26.5	FKF2	944	1 720	SC	37	37	472	117 600
297-663000	ECO	Standard	SYM	750-26.5	TRS2	880	1 720	SC	15	15	455	115 100
297-663000	ECO	Standard	SYM	780-26.5	FKF	880	1 720	SC	15	15	455	115 100
297-673000	ECO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	880	1 720	SC	10	10	460	125 000
297-656030	ECO	Standard	SYM	800-26.5	TRS2, A344	944	1 500	SC	17	17	485	121 300

ECO 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
ECO Standard												
297-656020	ECO	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	944	1 500	SC	27	27	475	116 000
297-677000	ECO	Standard	SYM	870-26.5	A344	944	1 500	SC	5	5	498	122 500
ECO Soft												
227-652040	ECO	Soft	SYM	710-22.5	FKF, A331, A343	905	1 300	SC	68	68	453	104 500
227-661020	ECO	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	905	1 430	SC	63	63	453	109 400
227-661025	ECO	Soft	SYM	710-24.5	TRS2, T428, T440, T480, A344	905	1 430	SC	48	48	453	109 400
227-644025	ECO	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	905	1 500	SC	48	48	453	118 700
227-644020	ECO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1 500	SC	58	58	453	118 200
227-654020	ECO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	905	1 720	SC	58	58	453	121 500


ECO 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
ECO Standard												
597-644020	ECO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	25	25	430	115 600
597-654080	ECO	Standard	SYM	750-26.5	FKF2	944	1 720	SC	37	37	472	126 800
597-654000	ECO	Standard	SYM	750-26.5	FKF, TRS, A343, A344	850	1 720	SC	25	25	430	126 800
597-673000	ECO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	880	1 720	SC	10	10	460	140 000
ECO Soft												
597-644021	ECO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1 500	SC	53	53	453	128 200
597-654020	ECO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	905	1 720	SC	53	53	453	126 800


ECO 30 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
ECO Standard												
497-644020	ECO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	25	25	436	138 600
497-654000	ECO	Standard	SYM	750-26.5	FKF, TRS, A343, A344	850	1 720	SC	25	25	436	141 800
497-663000	ECO	Standard	SYM	750-26.5	TRS2	880	1 720	SC	15	15	461	141 800
497-663000	ECO	Standard	SYM	780-26.5	FKF	880	1 720	SC	15	15	461	141 800
497-673000	ECO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	944	1 720	SC	37	37	472	156 200


Only single cleat in price list, more options available

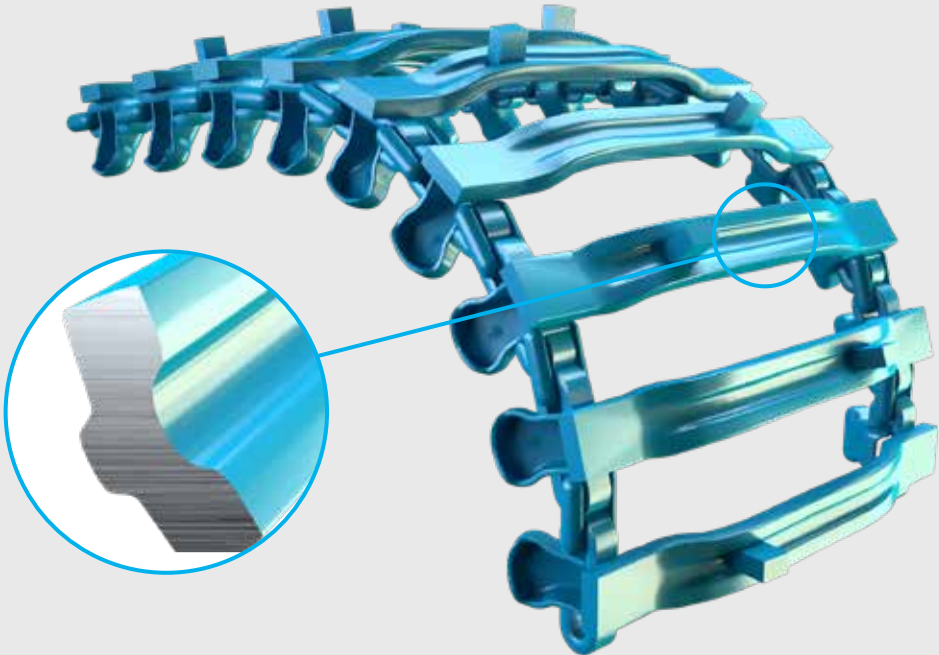


NARROW CROSS MEMBER





STANDARD CROSS MEMBER




SOFT CROSS MEMBER




M (STD)



M-NARROW



M-SOFT



KOVAX 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
KovaX Narrow												
188-670026	KovaX	Narrow	SYM	600-24.5	TRS2	680	1 430	SC	0	0	360	79 100
188-652040	KovaX	Narrow	SYM	710-22.5	FKF, A331, A343	770	1 300	SC	0	0	425	81 000
188-652020	KovaX	Narrow	SYM	710-22.5	FKF2, A643, A644	770	1 300	SC	0	0	430	81 000
188-652045	KovaX	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	770	1 300	SC	0	0	435	81 000
188-661022	KovaX	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	770	1 430	SC	0	0	425	85 900
188-661026	KovaX	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	795	1 430	SC	0	0	440	86 100
KovaX Standard												
188-640111	KovaX	Standard	SYM	600-22.5	ELS, T404, T423	740	1 300	SC	20	20	380	81 600
188-670025	KovaX	Standard	SYM	600-24.5	TRS2	740	1 430	SC	10	10	370	83 000
188-624020	KovaX	Standard	SYM	600-26.5	FKF	740	1 500	SC	30	30	370	89 300
188-662020	KovaX	Standard	SYM	650-24.5	FR, A342, A344	770	1 430	SC	15	15	400	82 800
188-644021	KovaX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	25	25	430	97 700
KovaX Soft												
188-652042	KovaX	Soft	SYM	710-22.5	FKF, A331, A343	903	1 300	SC	57	57	452	88 900
188-652021	KovaX	Soft	OSS	710-22.5	FKF2, A643, A644	836	1 300	SC	0	50	430	84 100
188-652041	KovaX	Soft	OSS	710-22.5	FKF, A331, A343	836	1 300	SC	0	57	425	84 500
188-652046	KovaX	Soft	OSS	710-22.5	TRS, TRS2, T428, A344	875	1 300	SC	0	75	435	87 300
188-644025	KovaX	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	903	1 500	SC	42	42	452	93 300
188-644020	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	903	1 500	SC	52	52	452	93 300

KOVAX 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
KovaX Narrow												
288-652045	KovaX	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	770	1 300	SC	0	0	435	79 000
288-652040	KovaX	Narrow	SYM	710-22.5	FKF, A331, A343	770	1 300	SC	0	0	425	79 000
288-661026	KovaX	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	795	1 430	SC	0	0	440	87 000
288-661022	KovaX	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	770	1 430	SC	0	0	430	87 000
288-644022	KovaX	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	770	1 500	SC	0	0	430	86 200
288-644026	KovaX	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	795	1 500	SC	0	0	440	86 200
288-680025	KovaX	Narrow	SYM	710-28.5	TRS2, A644	770	1 720	SC	0	0	435	104 800

Only single cleat in price list, more options available

KOVAX 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
KovaX Narrow												
288-654081	KovaX	Narrow	SYM	750-26.5	FKF2	850	1 720	SC	0	0	465	107 400
288-673000	KovaX	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	850	1 720	SC	0	0	465	115 100
288-656025	KovaX	Narrow	SYM	800-26.5	TRS2, A344	900	1 500	SC	0	0	490	105 000
288-656020	KovaX	Narrow	SYM	800-26.5	FKF, FKF2, T440, T480, A644	850	1 500	SC	0	0	475	100 200
KovaX Standard												
288-640115	KovaX	Standard	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	740	1 300	SC	10	10	445	79 200
288-624045	KovaX	Standard	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	740	1 500	SC	10	10	390	89 000
288-624040	KovaX	Standard	SYM	600-26.5	FKF2, FR, T428, A343	740	1 500	SC	20	20	380	89 000
288-652023	KovaX	Standard	SYM	710-22.5	FKF2, A643, A644	850	1 300	SC	25	25	430	82 100
288-644423	KovaX	Standard	SYM	710-26.5	T422	850	1 500	SC	15	15	425	97 700
288-644024	KovaX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	25	25	430	98 100
288-644027	KovaX	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	795	1 500	SC	15	15	440	96 100
288-654040	KovaX	Standard	SYM	710-30.5	T428	795	1 720	SC	8	8	420	103 200
288-654070	KovaX	Standard	SYM	750-26.5	A643, T480	870	1 720	SC	20	20	445	112 700
288-654080	KovaX	Standard	SYM	750-26.5	FKF2	903	1 720	SC	20	20	465	113 700
288-654021	KovaX	Standard	SYM	750-26.5	FKF, TRS, A343, A344	850	1 720	SC	25	25	430	107 400
288-663000	KovaX	Standard	SYM	750-26.5	TRS2	870	1 720	SC	10	10	455	114 800
288-663000	KovaX	Standard	SYM	780-26.5	FKF	870	1 720	SC	10	10	455	114 800
KovaX Soft												
288-654000	KovaX	Soft	OSS	700-30.5	A331	836	1 720	SC	0	56	425	111 100
288-652022	KovaX	Soft	SYM	710-22.5	FKF2, A643, A644	903	1 300	SC	52	52	452	85 500
288-652042	KovaX	Soft	SYM	710-22.5	FKF, A331, A343	903	1 300	SC	57	57	452	85 500
288-661023	KovaX	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	950	1 430	SC	75	75	475	94 000
288-661027	KovaX	Soft	OSS	710-24.5	TRS2, T428, T440, T480, A344	875	1 430	SC	0	65	445	93 200
288-661025	KovaX	Soft	SYM	710-24.5	TRS2, T428, T440, T480, A344	903	1 430	SC	42	42	452	90 800
288-661020	KovaX	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	903	1 430	SC	52	52	452	90 800
288-661021	KovaX	Soft	OSS	710-24.5	FKF, FKF2, A343, A644	836	1 430	SC	0	52	430	87 000
288-644025	KovaX	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	903	1 500	SC	41	41	452	97 700
288-644020	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	903	1 500	SC	51	51	452	94 500

KOVAX 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
KovaX Soft												
288-644021	KovaX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	836	1 500	SC	0	52	430	94 500
288-644422	KovaX	Soft	SYM	710-26.5	T422	950	1 500	SC	68	68	475	107 800
288-644023	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	950	1 500	SC	75	75	475	107 800
288-680020	KovaX	Soft	SYM	710-28.5	FKF2	903	1 720	SC	57	57	452	120 000
288-680026	KovaX	Soft	SYM	710-28.5	TRS2, A644	950	1 720	SC	70	70	475	122 500
288-654041	KovaX	Soft	SYM	710-30.5	T428	905	1 720	SC	62	62	453	111 800
288-654020	KovaX	Soft	SYM	750-26.5	FKF, TRS, A343, A344	903	1 720	SC	52	52	452	113 400
288-654060	KovaX	Soft	SYM	750-26.5	T428	903	1 720	SC	42	42	452	113 400
288-654060	KovaX	Soft	SYM	750-30.5	T428	903	1 720	SC	42	42	452	113 400
288-656021	KovaX	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	950	1 500	SC	30	30	475	107 300

KOVAX 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
KovaX Soft												
588-644020	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1 500	SC	52	52	453	110 700

KOVAX 30 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
KovaX Narrow												
488-644022	KovaX	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	770	1 500	SC	0	0	436	104 600
KovaX Standard												
488-644020	KovaX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	25	25	436	112 400
KovaX Soft												
488-644021	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1 500	SC	52	52	453	116 600
488-654080	KovaX	Soft	SYM	750-26.5	FKF2	950	1 720	SC	40	40	475	123 800
488-654000	KovaX	Soft	SYM	750-26.5	FKF, TRS, A343, A344	903	1 720	SC	52	52	452	122 100

Only single cleat in price list, more options available

KOVAX MAX LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
KovaX Narrow												
388-661021	KovaX	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	770	1 430	SC	0	0	424	108 600
388-644022	KovaX	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	770	1 500	SC	0	0	419	122 500
388-673001	KovaX	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	850	1 720	SC	0	0	459	136 200
388-656025	KovaX	Narrow	SYM	800-26.5	TRS2, A344	900	1 500	SC	0	0	482	126 000
388-656021	KovaX	Narrow	SYM	800-26.5	FKF, FKF2, T440, T480, A644	850	1 500	SC	0	0	464	123 900
KovaX Standard												
388-644030	KovaX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	25	25	425	126 600
388-680020	KovaX	Standard	SYM	710-28.5	FKF2	850	1 720	SC	18	18	426	144 600
388-654081	KovaX	Standard	SYM	750-26.5	FKF2	900	1 720	SC	15	15	514	140 700
388-663001	KovaX	Standard	SYM	750-26.5	TRS2	870	1 720	SC	10	10	444	143 900
388-663001	KovaX	Standard	SYM	780-26.5	FKF	870	1 720	SC	10	10	444	143 900
KovaX Soft												
388-652040	KovaX	Soft	SYM	710-22.5	FKF, A331, A343	905	1 300	SC	77	77	453	112 500
388-661020	KovaX	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	905	1 430	SC	50	50	453	124 100
388-644023	KovaX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	836	1 500	SC	0	52	426	131 400
388-644024	KovaX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1 500	SC	30	75	430	133 800
388-644020	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	903	1 500	SC	52	52	452	131 900
388-644021	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	950	1 500	SC	75	75	475	135 600
388-654080	KovaX	Soft	SYM	750-26.5	FKF2	950	1 720	SC	40	40	475	145 500
388-654021	KovaX	Soft	SYM	750-26.5	FKF, TRS, A343, A344	950	1 720	SC	70	70	475	150 800
388-654071	KovaX	Soft	SYM	750-26.5	A643, T480	950	1 720	SC	55	55	475	163 600
388-654070	KovaX	Soft	OSS	750-26.5	T480 Only	905	1 720	SC	10	55	442	158 300
388-654020	KovaX	Soft	SYM	750-26.5	FKF, TRS, A343, A344	903	1 720	SC	52	52	452	141 800
388-654060	KovaX	Soft	SYM	750-26.5	T428	903	1 720	SC	37	37	452	140 600
388-654060	KovaX	Soft	SYM	750-30.5	T428	903	1 720	SC	37	37	452	140 600
388-663000	KovaX	Soft	SYM	750-26.5	TRS2	950	1 720	SC	50	50	475	151 200
388-663000	KovaX	Soft	SYM	780-26.5	FKF	950	1 720	SC	50	50	475	151 200
388-663002	KovaX	Soft	OSS	750-26.5	TRS2	905	1 720	SC	10	45	442	136 500
388-663002	KovaX	Soft	OSS	780-26.5	FKF	905	1 720	SC	10	45	442	136 500

KOVAX MAX LINK SYSTEM


Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
KovaX Soft												
388-673000	KovaX	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	950	1 720	SC	40	40	475	145 500
388-656022	KovaX	Soft	OSS	800-26.5	FKF, FKF2, T440, T480, A644	905	1 500	SC	0	25	472	135 600
388-656020	KovaX	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	950	1 500	SC	25	25	475	141 400



Only single cleat in price list, more options available

Combination

OF-BALTIC™

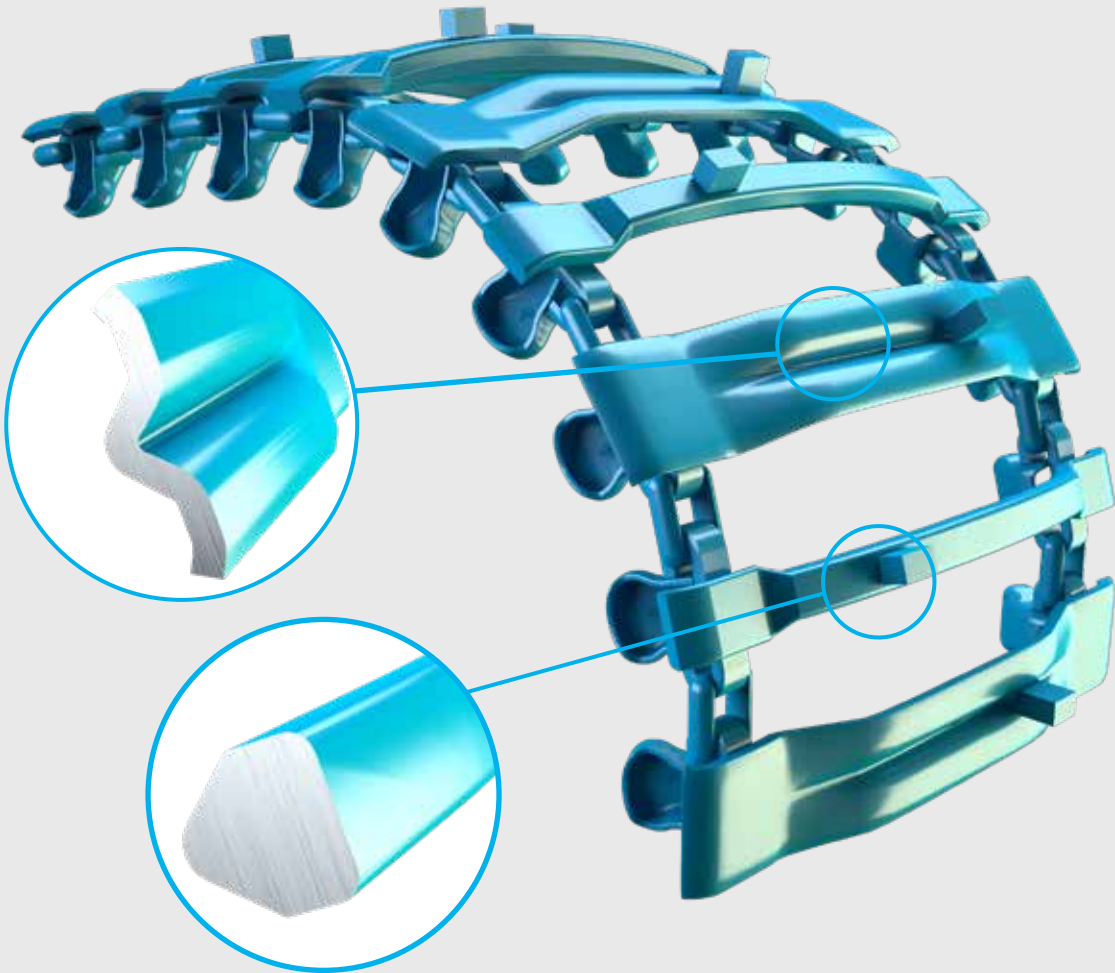

OF-SOFT CROSS MEMBER



OF-STANDARD CROSS MEMBER



BALTIC-SOFT CROSS MEMBER



BALTIC-STANDARD CROSS MEMBER



GRIP



FLOTATION



SNOW



GRIP



FLOTATION



SNOW

COMBINATION OF-BALTIC 22 MM LINK SYSTEM


Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
OF-Baltic Standard												
162-624045	OF-Baltic	Standard	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	730/725	1 500	SC	10	10	385	87 300

COMBINATION OF-BALTIC 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
OF-Baltic Standard												
261-652040	OF-Baltic	Standard	SYM	710-22.5	FKF, A331, A343	820/815	1 300	SC	15	15	425	85 200
261-652045	OF-Baltic	Standard	SYM	710-22.5	TRS, TRS2, T428, A344	850/770	1 300	SC	20	20	435	79 700

Combination

ECO-BALTIC™

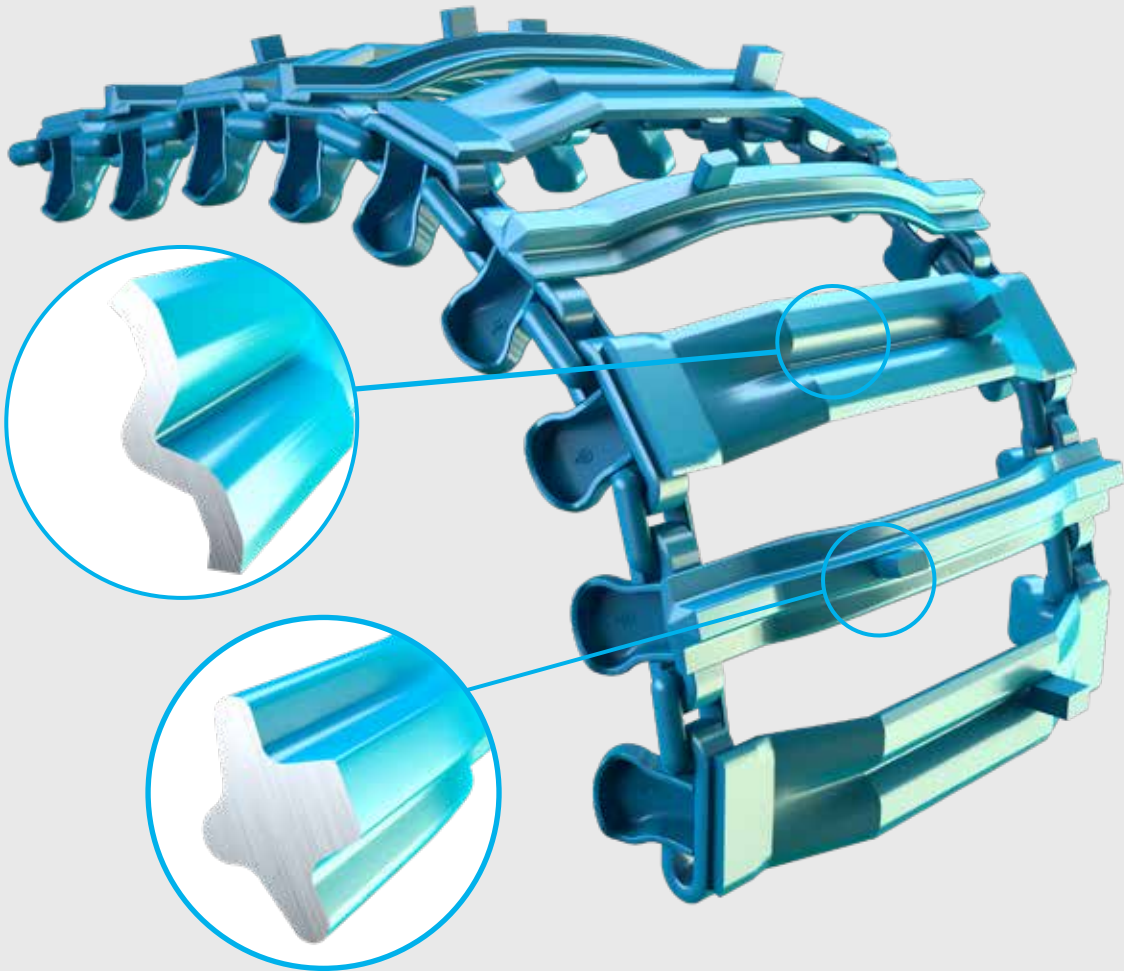

ECO-NARROW CROSS MEMBER ECO-STANDARD CROSS MEMBER



BALTIC-NARROW CROSS MEMBER BALTIC-STANDARD CROSS MEMBER



GRIP



FLOTATION



SNOW



GRIP



FLOTATION



SNOW

COMBINATION ECO-BALTIC 22 MM LINK SYSTEM


Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
ECO-BALTIC Narrow												
079-644025	ECO-Baltic	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	778/770	1 500	SC	0	0	435	96 500

COMBINATION ECO-BALTIC 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
ECO-BALTIC Narrow												
279-652040	ECO-Baltic	Narrow	SYM	710-22.5	FKF, A331, A343	765/750	1 300	SC	0	0	425	94 000
279-652045	ECO-Baltic	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	770/778	1 300	SC	0	0	435	94 000
279-661020	ECO-Baltic	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	765/750	1 430	SC	0	0	430	99 300
279-644020	ECO-Baltic	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, Fsb	750/765	1 500	SC	0	0	430	105 700
279-644025	ECO-Baltic	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	770/790	1 500	SC	0	0	440	105 700
279-656026	ECO-Baltic	Narrow	SYM	800-26.5	TRS2, A344	870/880	1 500	SC	0	0	485	113 200
ECO-BALTIC Standard												
279-654080	ECO-Baltic	Standard	SYM	750-26.5	FKF2	944/935	1 720	SC	37	37	472	141 800
279-663000	ECO-Baltic	Standard	SYM	750-26.5	TRS2	935/880	1 720	SC	43	43	468	123 100
279-663000	ECO-Baltic	Standard	SYM	780-26.5	FKF	935/880	1 720	SC	43	43	468	123 100
279-656020	ECO-Baltic	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	935/944	1 500	SC	27	27	475	118 200
279-656025	ECO-Baltic	Standard	SYM	800-26.5	TRS2, A344	935/944	1 500	SC	17	17	485	118 200

Combination

EVO-BALTIC™

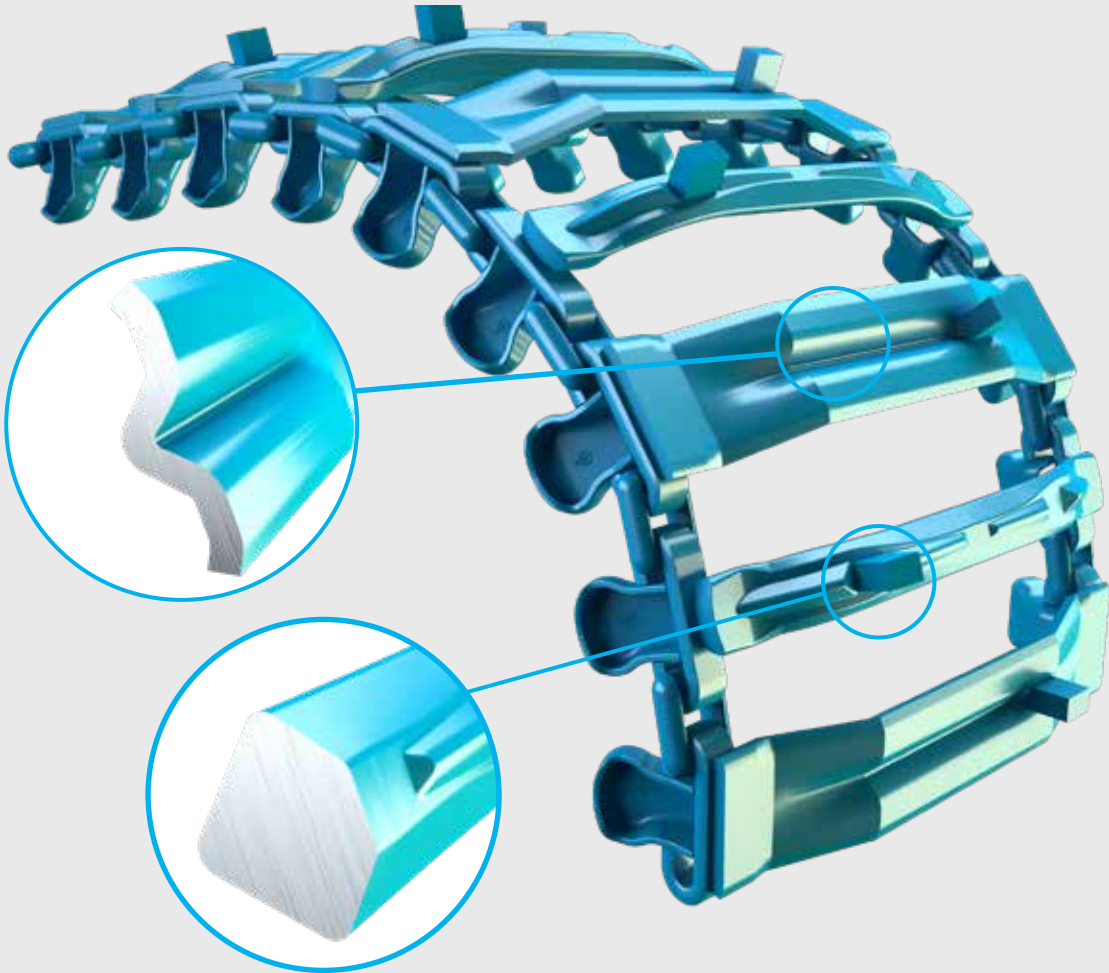

EVO-SOFT CROSS MEMBER



EVO-STANDARD CROSS MEMBER



BALTIC-SOFT CROSS MEMBER



BALTIC-STANDARD CROSS MEMBER



GRIP



FLOTATION



SNOW



GRIP



FLOTATION



SNOW

COMBINATION EVO-BALTIC 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EVO-Baltic Narrow												
049-652040	EVO-Baltic	Narrow	SYM	710-22.5	FKF, A331, A343	775/770	1 300	SC	0	0	425	89 900
049-661020	EVO-Baltic	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	775/770	1 430	SC	0	0	430	96 000
049-661025	EVO-Baltic	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	775/770	1 430	SC	0	0	435	96 000
EVO-Baltic Standard												
079-640115	EVO-Baltic	Standard	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	670/730	1 300	SC	10	10	385	89 600
049-624422	EVO-Baltic	Standard	SYM	600-26.5	T422	775/770	1 500	SC	20	20	388	93 300
049-644423	EVO-Baltic	Standard	SYM	710-26.5	T422	850/860	1 500	SC	18	18	430	119 200

COMBINATION EVO-BALTIC 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EVO-Baltic Narrow												
249-661020	EVO-Baltic	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	775/770	1 430	SC	0	0	430	94 500
EVO-Baltic Standard												
249-644026	EVO-Baltic	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	840/840	1 500	SC	10	10	440	121 900
249-644020	EVO-Baltic	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840/840	1 500	SC	20	20	430	105 700
249-644422	EVO-Baltic	Standard	SYM	710-26.5	T422	862/850	1 500	SC	21	21	435	110 800
249-644025	EVO-Baltic	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	860/870	1 500	SC	25	25	440	105 700
249-654080	EVO-Baltic	Standard	SYM	750-26.5	FKF2	915/935	1 720	SC	30	30	468	136 100
249-654000	EVO-Baltic	Standard	SYM	750-26.5	FKF, TRS, A343, A344	870/860	1 720	SC	35	35	435	124 400
249-654060	EVO-Baltic	Standard	SYM	750-26.5	T428	870/860	1 720	SC	75	75	440	124 400
249-654060	EVO-Baltic	Standard	SYM	750-30.5	T428	870/860	1 720	SC	75	75	440	124 400
249-663000	EVO-Baltic	Standard	SYM	750-26.5	TRS2	915/935	1 720	SC	43	43	468	131 700
249-663000	EVO-Baltic	Standard	SYM	780-26.5	FKF	915/935	1 720	SC	43	43	468	131 700
249-673020	EVO-Baltic	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	915/935	1 720	SC	38	38	468	135 000
249-656024	EVO-Baltic	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	960/935	1 500	SC	35	35	480	113 400
249-656020	EVO-Baltic	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	960/935	1 500	SC	35	35	480	115 700
249-656030	EVO-Baltic	Standard	SYM	800-26.5	TRS2, A344	935/960	1 500	SC	20	20	490	115 700
249-656621	EVO-Baltic	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	915/935	1 500	SC	18	18	480	127 400
EVO-Baltic Soft												
249-655025	EVO-Baltic	Soft	SYM	800-24.5	TRS2	960/935	1 430	SC	25	25	485	114 700

Only single cleat in price list, more options available

COMBINATION EVO-BALTIC 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EVO-Baltic Narrow												
549-644020	EVO-Baltic	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	775/760	1 500	SC	0	0	435	122 000

COMBINATION EVO-U 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EVO-U Standard												
046-644422	EVO-U	Standard	SYM	710-26.5	T422	870/840	1 500	SC	20	20	435	99 500

COMBINATION EVO-U 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EVO-U Standard												
246-644026	EVO-U	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	850/870	1 500	SC	15	15	440	105 100

COMBINATION KOVAX-BALTIC 26 MM LINK SYSTEM


Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
KovaX-Baltic Standard												
289-644020	KovaX-Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	875/890	1 500	SC	0	105	430	108 700

COMBINATION U-BALTIC 22 MM LINK SYSTEM


Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
U-Baltic Narrow												
168-652045	U-Baltic	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	770/770	1 300	SC	0	0	435	81 000
168-661025	U-Baltic	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	770/770	1 430	SC	0	0	435	85 600
U-Baltic Soft												
168-661026	U-Baltic	Soft	SYM	710-24.5	TRS2, T428, T440, T480, A344	873/913	1 430	SC	51	51	456	90 700




Only single cleat in price list, more options available

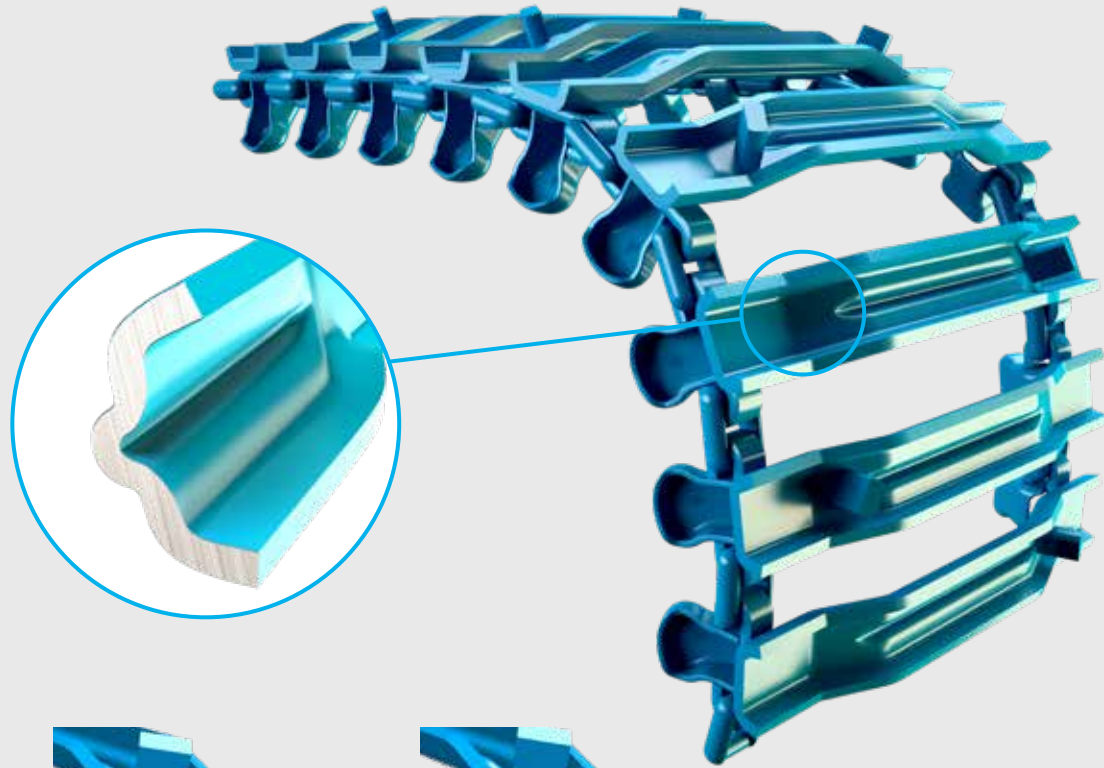

NARROW CROSS MEMBER



STANDARD CROSS MEMBER



SOFT CROSS MEMBER



GRIP FLOTATION SNOW



GRIP FLOTATION SNOW



GRIP FLOTATION SNOW

U 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
U Narrow												
096-640025	U	Narrow	SYM	600-22.5	A331	655	1 300	SC	0	0	365	73 300
096-640111	U	Narrow	SYM	600-22.5	ELS, T404, T423	675	1 300	SC	0	0	375	77 000
096-640115	U	Narrow	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	675	1 300	SC	0	0	385	77 000
096-624040	U	Narrow	SYM	600-26.5	FKF2, FR, T428, A343	675	1 500	SC	0	0	375	85 600
096-624045	U	Narrow	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	675	1 500	SC	0	0	385	85 600
096-652040	U	Narrow	SYM	710-22.5	FKF, A331, A343	770	1 300	SC	0	0	420	78 300
096-652045	U	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	770	1 300	SC	0	0	430	78 300
096-652020	U	Narrow	SYM	710-22.5	FKF2, A643, A644	770	1 300	SC	0	0	430	78 300
096-644020	U	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	770	1 500	SC	0	0	425	99 800
U Standard												
096-661020	U	Standard	SYM	710-24.5	FKF, FKF2, A343, A644	820	1 430	SC	15	15	425	102 900
096-644422	U	Standard	SYM	710-26.5	T422	850	1 500	SC	10	10	425	103 800
096-644025	U	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	850	1 500	SC	20	20	435	103 800

U 26 MM LINK SYSTEM


Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
OF Standard												
296-661020	U	Standard	SYM	710-24.5	FKF, FKF2, A343, A644	820	1 430	SC	15	15	425	100 600
296-644422	U	Standard	SYM	710-26.5	T422	850	1 500	SC	5	5	425	108 600
296-644025	U	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	850	1 500	SC	20	20	435	108 700
296-644020	U	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	30	30	425	107 500
OF Soft												
296-662020	U	Soft	SYM	650-24.5	FR, A342, A344	924	1 430	SC	92	92	462	106 100
296-661027	U	Soft	SYM	710-24.5	TRS2, T428, T440, T480, A344	873	1 430	SC	31	31	435	105 700
296-644026	U	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TIFG	905	1 500	SC	10	75	440	111 300
296-644022	U	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1 500	SC	25	90	430	105 500
296-644021	U	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	924	1 500	SC	67	67	462	109 400
296-644023	U	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	873	1 500	SC	36	36	437	106 900
296-656020	U	Soft	SYM	800-26.5	FKF, FKF2, T440, T480	973	1 500	SC	36	36	486	114 300

Only single cleat in price list, more options available

U 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
U Standard												
596-644020	U	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	25	25	430	120 400
596-654021	U	Standard	SYM	750-26.5	FKF, TRS, A343, A344	850	1 720	SC	25	25	425	127 200
U Soft												
596-644023	U	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	873	1 500	SC	36	36	437	119 800



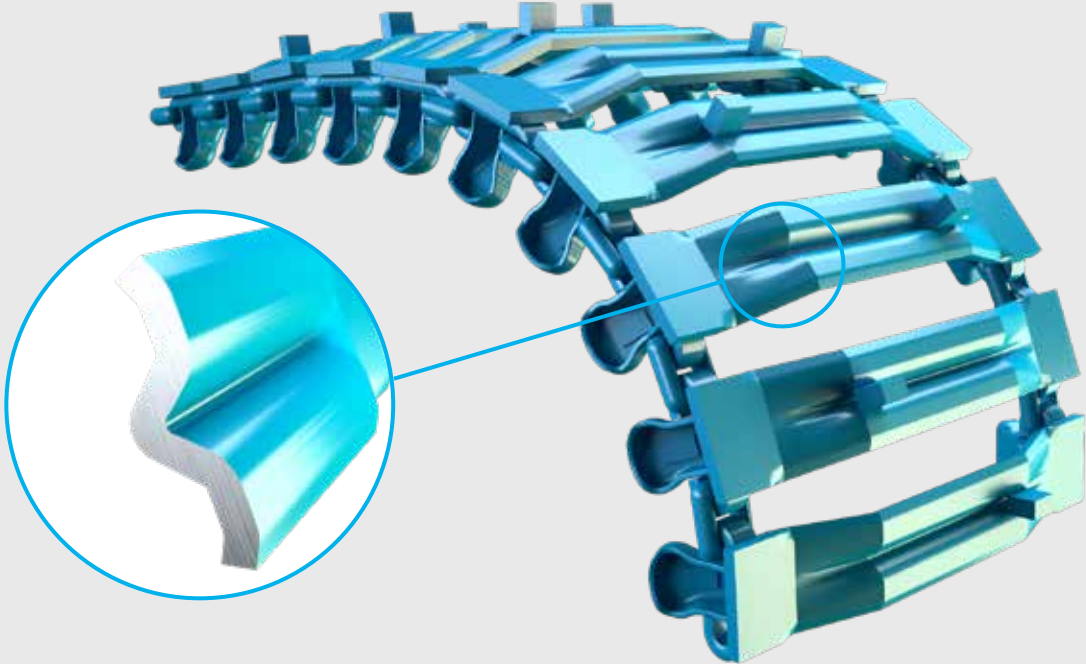

NARROW CROSS MEMBER



STANDARD CROSS MEMBER



SOFT CROSS MEMBER



GRIP FLOTATION SNOW



GRIP FLOTATION SNOW



GRIP FLOTATION SNOW

BALTIC 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
Baltic Narrow												
199-670026	Baltic	Narrow	SYM	600-24.5	TRS2	680	1 430	SC	0	0	360	88 200
089-652045	Baltic	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	770	1 300	SC	0	0	435	76 100
089-652020	Baltic	Narrow	SYM	710-22.5	FKF2, A643, A644	770	1 300	SC	0	0	430	76 100
089-652040	Baltic	Narrow	SYM	710-22.5	FKF, A331, A343	750	1 300	SC	0	0	420	76 100
199-661025	Baltic	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	770	1 430	SC	0	0	430	90 700
199-661020	Baltic	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	750	1 430	SC	0	0	425	87 700
199-644045	Baltic	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	770	1 500	SC	0	0	430	94 000
199-644040	Baltic	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TIFF, FsB	770	1 500	SC	0	0	425	94 000
Baltic Standard												
089-616030	Baltic	Standard	SYM	550-22.5	ELS, A328	650	1 300	SC	5	5	350	71 400
089-640115	Baltic	Standard	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	730	1 300	SC	10	10	385	81 900
089-640111	Baltic	Standard	SYM	600-22.5	ELS, T404, T423	730	1 300	SC	20	20	375	81 900
089-640025	Baltic	Standard	SYM	600-22.5	A331	730	1 300	SC	30	30	365	81 900
199-670025	Baltic	Standard	SYM	600-24.5	TRS2	730	1 430	SC	10	10	365	92 100
199-624422	Baltic	Standard	SYM	600-26.5	T422	750	1 500	SC	10	10	375	94 500
199-624045	Baltic	Standard	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	730	1 500	SC	10	10	385	93 500
199-624040	Baltic	Standard	SYM	600-26.5	FKF2, FR, T428, A343	730	1 500	SC	20	20	375	93 500
199-624020	Baltic	Standard	SYM	600-26.5	FKF	730	1 500	SC	30	30	365	93 500
199-653020	Baltic	Standard	SYM	650-26.5	ELS, TRS, A343, A344	730	1 720	SC	20	20	375	105 400
199-674000	Baltic	Standard	SYM	700-26	BEL 194	770	1 500	SC	10	10	405	98 300
199-655020	Baltic	Standard	SYM	800-24.5	FKF2	935	1 430	SC	28	28	470	122 200
Baltic Soft												
198-675000	Baltic	Soft	OSS	500-17.5	TVS	748	1 100	SC	45	113	340	69 000
198-640115	Baltic	Soft	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344, A644	816	1 300	SC	50	50	408	88 600
198-624020	Baltic	Soft	SYM	600-26.5	FKF	816	1 500	SC	75	75	408	102 800
198-624422	Baltic	Soft	SYM	600-26.5	T422	816	1 500	SC	65	65	408	105 700
198-624040	Baltic	Soft	SYM	600-26.5	FKF2, FR, T428, A343	816	1 500	SC	65	65	408	102 800
198-653020	Baltic	Soft	SYM	650-26.5	T428	816	1 720	SC	55	55	408	121 300
198-652044	Baltic	Soft	ASYM	710-22.5	FKF, A331, A343	1060	1 300	SC	65	215	455	120 000
198-652049	Baltic	Soft	OSS	710-22.5	TRS, TRS2, T428, A344	1000	1 300	SC	0	200	395	120 100
198-652050	Baltic	Soft	OSS	710-22.5	FKF, A331, A343	1000	1 300	SC	10	210	400	120 000
198-652042	Baltic	Soft	OSS	710-22.5	FKF, A331, A343	890	1 300	SC	0	120	382	103 800

Only single cleat in price list, more options available

BALTIC 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
Baltic Soft												
198-652020	Baltic	Soft	SYM	710-22.5	FKF2, A643, A644	913	1 300	SC	65	65	457	100 900
198-652040	Baltic	Soft	SYM	710-22.5	FKF, A331, A343	913	1 300	SC	70	70	457	100 900
198-652047	Baltic	Soft	SYM	710-22.5	TRS, TRS2, T428, A344	913	1 300	SC	53	53	457	101 300
198-652046	Baltic	Soft	SYM	710-22.5	TRS, TRS2, T428, A344	1016	1 300	SC	110	110	508	113 700
198-652022	Baltic	Soft	SYM	710-22.5	FKF2, A643, A644	1016	1 300	SC	113	113	508	105 600
198-652041	Baltic	Soft	SYM	710-22.5	FKF, A331, A343	1016	1 300	SC	120	120	508	113 200
198-652048	Baltic	Soft	OSS	710-22.5	TRS, TRS2, T428, A344	925	1 300	SC	10	100	435	106 400
198-652043	Baltic	Soft	OSS	710-22.5	FKF, A331, A343	925	1 300	SC	30	120	420	103 800
198-661022	Baltic	Soft	OSS	710-24.5	FKF, FKF2, A343, A644	870	1 430	SC	20	60	425	110 300
198-661025	Baltic	Soft	SYM	710-24.5	TRS2, T428, T440, T480, A344	913	1 430	SC	60	60	457	116 900
198-661026	Baltic	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	921	1 430	SC	65	65	461	128 100
198-661020	Baltic	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	913	1 430	SC	65	65	457	112 500
198-661027	Baltic	Soft	OSS	710-24.5	TRS2, T428, T440, T480, A344	925	1 430	SC	10	100	435	115 500
198-661023	Baltic	Soft	OSS	710-24.5	FKF, FKF2, A343, A644	925	1 430	SC	20	115	425	115 500
198-644024	Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	925	1 500	SC	110	25	425	136 600
198-644025	Baltic	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	913	1 500	SC	55	55	457	117 000
198-644020	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	913	1 500	SC	65	65	457	117 000
198-644029	Baltic	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TIFG	1000	1 500	SC	0	200	435	141 900
198-644128	Baltic	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TIFG	925	1 500	SC	10	100	435	118 200
198-644424	Baltic	Soft	SYM	710-26.5	T422	1016	1 500	SC	100	100	508	123 800
198-644021	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1016	1 500	SC	115	115	508	123 200
198-644022	Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	890	1 500	SC	0	115	425	118 200

BALTIC 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
Baltic Narrow												
299-652040	Baltic	Narrow	SYM	710-22.5	FKF, A331, A343	750	1 300	SC	0	0	420	84 500

BALTIC 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
Baltic Narrow												
299-652045	Baltic	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	770	1 300	SC	0	0	435	86 400
299-661025	Baltic	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	770	1 430	SC	0	0	435	90 700
299-661020	Baltic	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	770	1 430	SC	0	0	425	90 700
299-644020	Baltic	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	760	1 500	SC	0	0	425	102 200
299-644026	Baltic	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	770	1 500	SC	0	0	435	96 600
299-654040	Baltic	Narrow	SYM	710-30.5	T428	760	1 720	SC	0	0	420	120 500
299-654020	Baltic	Narrow	SYM	750-26.5	FKF, TRS, A343, A344	770	1 720	SC	0	0	425	108 600
299-656020	Baltic	Narrow	SYM	800-26.5	FKF, FKF2, T440, T480, A644	870	1 500	SC	0	0	475	115 000
Baltic Standard												
299-643025	Baltic	Standard	SYM	500-26.5	A331	650	1 500	SC	35	35	325	87 000
299-624021	Baltic	Standard	SYM	600-26.5	FKF	730	1 500	SC	30	30	365	93 100
299-624041	Baltic	Standard	SYM	600-26.5	FR, FKF2, T428, A343	730	1 500	SC	30	30	375	93 100
299-653020	Baltic	Standard	SYM	650-26.5	ELS, TRS, A343, A344	730	1 720	SC	20	20	375	99 800
299-674000	Baltic	Standard	SYM	700-26	BEL 194	760	1 500	SC	5	5	405	102 200
299-652020	Baltic	Standard	SYM	710-22.5	FKF2, A643, A644	840	1 300	SC	20	20	430	102 800
299-661021	Baltic	Standard	SYM	710-24.5	FKF, FKF2, A343, A644	870	1 430	SC	40	40	435	97 700
299-644040	Baltic	Standard	SYM	710-26.5	Firestone, BKT	770	1 500	SC	15	15	400	102 800
299-644422	Baltic	Standard	SYM	710-26.5	T422	870	1 500	SC	18	18	430	111 300
299-644025	Baltic	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	860	1 500	SC	25	25	435	102 800
299-644022	Baltic	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	860	1 500	SC	35	35	430	117 600
299-654070	Baltic	Standard	SYM	750-26.5	A643, T480	935	1 720	SC	58	58	468	138 200
299-654021	Baltic	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1 720	SC	25	25	425	132 600
299-654080	Baltic	Standard	SYM	750-26.5	FKF2	935	1 720	SC	38	38	468	120 800
299-654060	Baltic	Standard	SYM	750-26.5	T428	870	1 720	SC	30	30	435	112 000
299-654060	Baltic	Standard	SYM	750-30.5	T428	870	1 720	SC	30	30	435	112 000
299-663020	Baltic	Standard	SYM	750-26.5	TRS2	935	1 720	SC	48	48	468	123 900
299-663020	Baltic	Standard	SYM	780-26.5	FKF	935	1 720	SC	48	48	468	123 900
299-673020	Baltic	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	935	1 720	SC	38	38	468	123 900
299-656030	Baltic	Standard	SYM	800-26.5	TRS2, A344	935	1 500	SC	13	13	485	108 000
299-677000	Baltic	Standard	SYM	870-26.5	A344	935	1 500	SC	5	5	493	129 900

BALTIC 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
Baltic Soft												
298-624020	Baltic	Soft	SYM	600-26.5	FKF	816	1 500	SC	73	73	408	98 700
298-653020	Baltic	Soft	SYM	650-26.5	ELS, TRS, A343, A344	816	1 720	SC	63	63	408	113 400
298-652043	Baltic	Soft	OSS	710-22.5	FKF, A331, A343	920	1 300	SC	27	113	420	95 000
298-652045	Baltic	Soft	OSS	710-22.5	TRS, TRS2, T428, A344	925	1 300	SC	15	100	435	95 000
298-652042	Baltic	Soft	ASYM	710-22.5	FKF, A331, A343	1060	1 300	SC	65	215	455	123 800
298-652046	Baltic	Soft	OSS	710-22.5	TRS, TRS2, T428, A344	1000	1 300	SC	0	200	435	121 800
298-652020	Baltic	Soft	SYM	710-22.5	FKF2, A643, A644	913	1 300	SC	57	57	457	99 800
298-661027	Baltic	Soft	OSS	710-24.5	TRS2, T428, T440, T480, A344	925	1 430	SC	12	103	435	102 900
298-661023	Baltic	Soft	OSS	710-24.5	FKF, FKF2, A343, A644	925	1 430	SC	22	113	425	102 900
298-661025	Baltic	Soft	SYM	710-24.5	TRS2, T428, T440, T480, A344	921	1 430	SC	56	56	461	120 800
298-661035	Baltic	Soft	ASYM	710-24.5	TRS2, T428, T440, T480, A344	1060	1 430	SC	50	200	455	126 800
298-644030	Baltic	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1060	1 500	SC	60	210	455	138 900
298-644029	Baltic	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TIFG	1000	1 500	SC	0	200	435	133 900
298-644033	Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1000	1 500	SC	0	219	425	129 900
298-644025	Baltic	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	1015	1 500	SC	103	103	508	128 700
298-644021	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1015	1 500	SC	113	113	508	131 300
298-644031	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1210	1 500	SC	210	210	605	145 500
298-644024	Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	880	1 500	SC	0	110	425	123 900
298-644422	Baltic	Soft	SYM	710-26.5	T422	921	1 500	SC	51	51	461	123 900
298-644020	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	920	1 500	SC	65	65	460	123 900
298-644032	Baltic	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1110	1 500	SC	105	205	505	142 800
298-644421	Baltic	Soft	OSS	710-26.5	T422	925	1 500	SC	15	80	420	124 100
298-644028	Baltic	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TIFG	925	1 500	SC	15	100	435	125 000
298-644023	Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	925	1 500	SC	25	110	420	122 500
298-644423	Baltic	Soft	ASYM	710-26.5	T422	1060	1 500	SC	50	180	465	139 200
298-644035	Baltic	Soft	ASYM	710-26.5	TRS, TRS2, T440, A344, TIFG	1060	1 500	SC	50	200	455	139 200
298-680025	Baltic	Soft	SYM	710-28.5	TRS2, A644	921	1 720	SC	56	56	461	143 100
298-654081	Baltic	Soft	SYM	750-26.5	FKF2	925	1 720	SC	0	75	460	122 700

BALTIC 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
Baltic Soft												
298-654030	Baltic	Soft	ASYM	750-26.5	FKF, TRS, A343, A344	1060	1 720	SC	60	210	455	142 800
298-654080	Baltic	Soft	OSS	750-26.5	FKF2	1023	1 720	SC	82	82	512	134 300
298-654021	Baltic	Soft	SYM	750-26.5	FKF, TRS, A343, A344	1023	1 720	SC	115	115	512	138 500
298-654070	Baltic	Soft	SYM	750-26.5	A643, T480	1015	1 720	SC	98	98	508	145 600
298-654020	Baltic	Soft	SYM	750-26.5	FKF, TRS, A343, A344	921	1 720	SC	71	71	461	129 900
298-654060	Baltic	Soft	SYM	750-26.5	T428	921	1 720	SC	48	48	461	128 700
298-654060	Baltic	Soft	SYM	750-30.5	T428	921	1 720	SC	48	48	461	128 700
298-654061	Baltic	Soft	ASYM	750-26.5	T428	1060	1 720	SC	50	190	460	139 200
298-654061	Baltic	Soft	ASYM	750-30.5	T428	1060	1 720	SC	50	190	460	139 200
298-663021	Baltic	Soft	SYM	750-26.5	TRS2	1015	1 720	SC	85	85	508	134 300
298-663021	Baltic	Soft	SYM	780-26.5	FKF	1015	1 720	SC	85	85	508	134 300
298-663022	Baltic	Soft	OSS	750-26.5	TRS2	1035	1 720	SC	10	185	450	149 600
298-663022	Baltic	Soft	OSS	780-26.5	FKF	1035	1 720	SC	10	185	450	149 600
298-663020	Baltic	Soft	OSS	750-26.5	TRS2	925	1 720	SC	9	76	450	138 200
298-663020	Baltic	Soft	OSS	780-26.5	FKF	925	1 720	SC	9	76	450	138 200
298-663032	Baltic	Soft	ASYM	750-26.5	TRS2	1110	1 720	SC	85	185	505	154 200
298-663032	Baltic	Soft	ASYM	780-26.5	FKF	1110	1 720	SC	85	185	505	154 200
298-673021	Baltic	Soft	ASYM	780-28.5	FKF2, TRS2, T480, A643, A644	1110	1 720	SC	75	175	505	145 500
298-673020	Baltic	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	1023	1 720	SC	82	82	512	136 200
298-655021	Baltic	Soft	OSS	800-24.5	FKF2	925	1 430	SC	0	65	470	116 300
298-655022	Baltic	Soft	OSS	800-24.5	FKF2	1035	1 430	SC	0	165	470	129 800
298-656028	Baltic	Soft	OSS	800-26.5	TRS2, A344	1095	1 500	SC	35	150	490	135 600
298-656027	Baltic	Soft	OSS	800-26.5	TRS2, A344	1035	1 500	SC	0	145	485	130 300
298-656022	Baltic	Soft	OSS	800-26.5	FKF, FKF2, T440, T480, A644	1035	1 500	SC	0	160	475	131 900
298-656026	Baltic	Soft	ASYM	800-26.5	TRS2, A344	1110	1 500	SC	50	150	505	139 700
298-656025	Baltic	Soft	SYM	800-26.5	TRS2, A344	1015	1 500	SC	53	53	508	126 900
298-656021	Baltic	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	1015	1 500	SC	63	63	508	128 700
298-677020	Baltic	Soft	SYM	870-26.5	A344	1210	1 500	SC	143	143	605	147 000


BALTIC 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
Baltic Narrow												
599-644021	Baltic	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	760	1 500	SC	0	0	425	119 700
599-654021	Baltic	Narrow	SYM	750-26.5	FKF, TRS, A343, A344	760	1 720	SC	0	0	425	133 400
Baltic Standard												
599-654081	Baltic	Standard	SYM	750-26.5	FKF, TRS, A343, A344	935	1 720	SC	38	38	468	146 000
599-673021	Baltic	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	935	1 720	SC	38	38	468	138 800
Baltic Soft												
599-644020	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	921	1 500	SC	66	66	461	133 400
599-654020	Baltic	Soft	SYM	750-26.5	FKF, TRS, A343, A344	921	1 720	SC	66	66	461	145 500
599-654080	Baltic	Soft	SYM	750-26.5	FKF2	1015	1 720	SC	78	78	508	150 500
599-673020	Baltic	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	1015	1 720	SC	78	78	508	152 600

BALTIC 30 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
Baltic Standard												
499-656021	Baltic	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	935	1 500	SC	28	28	476	130 200
Baltic Soft												
498-644020	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1015	1 500	SC	113	113	508	136 200
498-654000	Baltic	Soft	SYM	750-26.5	FKF, TRS, A343, A344	921	1 720	SC	66	66	461	144 300
498-656020	Baltic	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	1015	1 500	SC	68	68	508	136 500



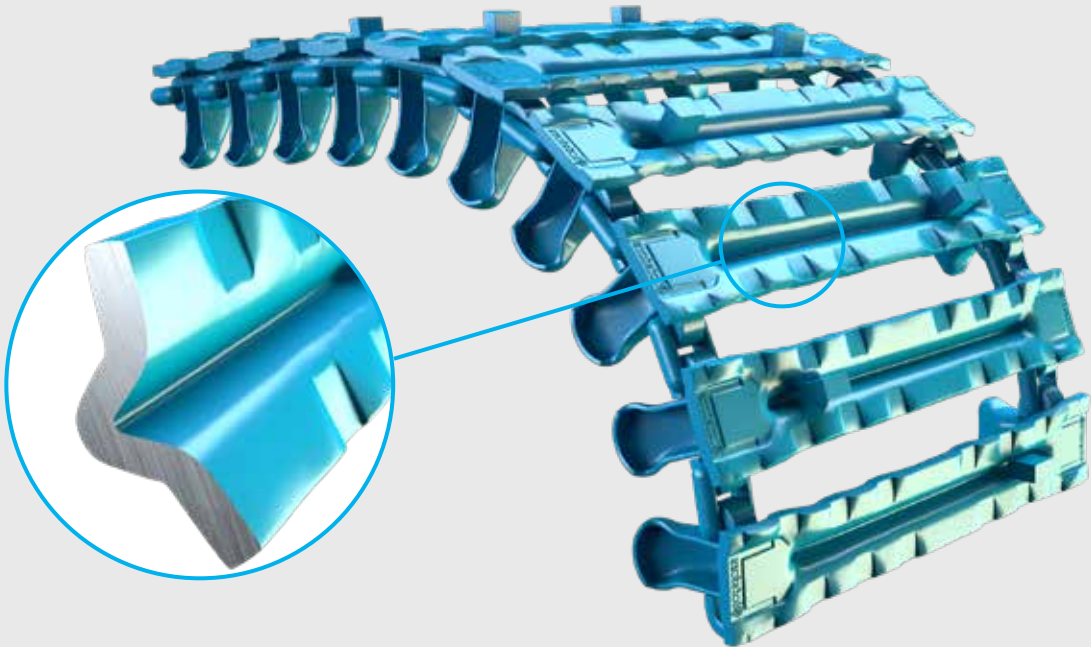


NARROW CROSS MEMBER



STANDARD CROSS MEMBER



SOFT CROSS MEMBER



M (STD)



M-SOFT



GRIP FLOTATION SNOW



GRIP FLOTATION SNOW



GRIP FLOTATION SNOW



GRIP FLOTATION SNOW



GRIP FLOTATION SNOW

COVERX 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
Baltic Narrow												
177-652028	CoverX	Narrow	SYM	710-22.5	TRS, TRS2, T428, A344	780	1 300	SC	0	0	440	89 900
177-661026	CoverX	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	781	1 430	SC	0	0	435	95 400
177-644028	CoverX	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	781	1 500	SC	0	0	440	101 000
Baltic Standard												
177-662020	CoverX	Standard	SYM	650-24.5	FR, A342, A344	760	1 430	SC	15	15	392	92 700
177-661020	CoverX	Standard	SYM	710-24.5	FKF, FKF2, A343, A644	820	1 430	SC	20	20	420	98 500
Baltic Soft												
177-624045	CoverX	Soft	SYM	600-26.5	TRS, TRS2, T440, T480, A344, A644	820	1 500	SC	55	55	440	105 500
177-652021	CoverX	Soft	OSS	710-22.5	FKF2, A643, A644	930	1 300	SC	25	115	422	98 300
177-652045	CoverX	Soft	OSS	710-22.5	TRS, TRS2, T428, A344	930	1 300	SC	10	100	437	99 000
177-652040	CoverX	Soft	OSS	710-22.5	FKF, A331, A343	930	1 300	SC	30	120	420	99 000
177-652041	CoverX	Soft	OSS	710-22.5	FKF, A331, A343	890	1 300	SC	0	120	417	96 200
177-644025	CoverX	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	920	1 500	SC	50	50	460	109 900
177-644021	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	919	1 500	SC	60	60	460	109 900
177-644029	CoverX	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TIFG	930	1 500	SC	10	100	437	111 300
177-644001	CoverX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	930	1 500	SC	25	115	422	112 000
177-680025	CoverX	Soft	SYM	710-28.5	TRS2, A644	919	1 720	SC	60	60	460	124 400

COVERX 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
CoverX Narrow												
277-661022	CoverX	Narrow	SYM	710-24.5	FKF, FKF2, A343, A644	760	1 430	SC	0	0	425	110 900
277-661026	CoverX	Narrow	SYM	710-24.5	TRS2, T428, T440, T480, A344	781	1 430	SC	0	0	440	112 700
277-644002	CoverX	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	781	1 500	SC	0	0	430	119 700
277-644028	CoverX	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	780	1 500	SC	0	0	440	119 400
CoverX Standard												
277-644010	CoverX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	30	30	425	125 000
CoverX Soft												

COVERX 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
CoverX Soft												
277-652040	CoverX	Soft	SYM	710-22.5	FKF, A331, A343	919	1 300	SC	70	70	460	116 600
277-652020	CoverX	Soft	OSS	710-22.5	FKF2, A643, A644	890	1 300	SC	0	110	428	100 600
277-652041	CoverX	Soft	OSS	710-22.5	FKF, A331, A343	930	1 300	SC	30	120	420	118 700
277-661000	CoverX	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	1020	1 430	SC	115	115	510	133 600
277-661027	CoverX	Soft	OSS	710-24.5	TRS2, T428, T440, T480, A344	850	1 430	SC	0	50	438	118 300
277-661021	CoverX	Soft	OSS	710-24.5	FKF, FKF2, A343, A644	850	1 430	SC	0	70	423	118 400
277-661025	CoverX	Soft	SYM	710-24.5	TRS2, T428, T440, T480, A344	920	1 430	SC	10	10	460	124 500
277-661020	CoverX	Soft	SYM	710-24.5	FKF, FKF2, A343, A644	919	1 430	SC	65	65	460	124 500
277-661023	CoverX	Soft	OSS	710-24.5	FKF, FKF2, A343, A644	760	1 430	SC	25	115	420	126 400
277-661029	CoverX	Soft	OSS	710-24.5	TRS2, T428, T440, T480, A344	930	1 430	SC	0	100	438	126 400
277-644011	CoverX	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1019	1 500	SC	65	165	460	145 100
277-644027	CoverX	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	970	1 500	SC	40	110	460	143 400
277-644003	CoverX	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1120	1 500	SC	110	210	510	152 300
277-644024	CoverX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1000	1 500	SC	0	210	428	144 000
277-644026	CoverX	Soft	ASYM	710-26.5	TRS, TRS2, T440, A344, TIFG	1066	1 500	SC	54	202	460	150 000
277-644029	CoverX	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TIFG	920	1 500	SC	0	160	438	137 900
277-644001	CoverX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	930	1 500	SC	20	110	428	137 600
277-644022	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1220	1 500	SC	210	210	610	169 800
277-644000	CoverX	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1070	1 500	SC	60	210	460	151 400
277-644023	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1020	1 500	SC	110	110	510	146 500
277-644004	CoverX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1 500	SC	0	60	428	126 000
277-644025	CoverX	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	920	1 500	SC	50	50	460	135 900
277-644021	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	920	1 500	SC	64	64	460	135 900
277-680026	CoverX	Soft	OSS	710-28.5	TRS2, A644	1070	1 720	SC	55	205	460	168 400
277-654040	CoverX	Soft	SYM	710-30.5	T428	919	1 720	SC	75	75	460	151 200
277-654082	CoverX	Soft	OSS	750-26.5	FKF2	985	1 720	SC	0	125	463	161 500
277-654081	CoverX	Soft	SYM	750-26.5	FKF2	1020	1 720	SC	80	80	510	162 900
277-663020	CoverX	Soft	SYM	750-26.5	TRS2	1020	1 720	SC	90	90	510	163 000

COVERX 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
CoverX Soft												
277-663020	CoverX	Soft	SYM	780-26.5	FKF	1020	1 720	SC	90	90	510	163 000
277-673020	CoverX	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	1020	1 720	SC	80	80	510	162 900
277-656021	CoverX	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	1070	1 500	SC	65	65	535	156 000
277-656026	CoverX	Soft	ASYM	800-26.5	TRS2, A344	1070	1 500	SC	55	105	510	152 400
277-656027	CoverX	Soft	SYM	800-26.5	TRS2, A344	1020	1 500	SC	55	55	510	141 800
277-656025	CoverX	Soft	OSS	800-26.5	TRS2, A344	995	1 500	SC	0	105	483	146 000
277-656023	CoverX	Soft	OSS	800-26.5	FKF, FKF2, T440, T480, A644	995	1 500	SC	0	115	473	141 800
277-656022	CoverX	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	1020	1 500	SC	65	65	510	147 000

COVERX 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
CoverX Soft												
577-644021	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	920	1 500	SC	60	60	460	145 800
577-673020	CoverX	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	1020	1 720	SC	80	80	510	179 200
577-656020	CoverX	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	1020	1 500	SC	65	65	510	156 600

Long bogie



Long bogie - CC 1690, 1890, 1980 and 3000.

LONG BOGIE 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
ECO Narrow												
097-644625	ECO	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	778	1690	SC	0	0	435	104 000
Baltic Soft												
198-644040	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	913	3000	SC	65	65	457	165 500

LONG BOGIE 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EX Standard												
290-644620	EX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	866	1690	SC	33	33	433	110 500
290-644031	EX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	866	1890	SC	33	33	433	116 600
OF Standard												
295-644625	OF	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	850	1690	SC	20	20	435	101 700
295-644042	OF	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1890	SC	20	20	430	107 200
295-644620	OF	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1690	SC	20	20	430	101 600
EVO Standard												
294-644042	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1690	SC	20	20	430	104 000
294-644030	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1880	SC	20	20	430	106 300
294-654030	EVO	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	1880	SC	20	20	430	113 400
294-654092	EVO	Standard	SYM	750-26.5	FKF2	915	1980	SC	23	23	465	120 800
294-673032	EVO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	915	1980	SC	20	20	465	124 800
EVO Soft												
294-627000	EVO	Soft	SYM	30.5-32	FS	960	1980	SC	25	25	485	147 800
294-644032	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	960	1890	SC	80	80	480	117 400
294-644041	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	3000	SC	55	55	453	144 400
294-644031	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1880	SC	55	55	453	110 800
294-644625	EVO	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	906	1690	SC	43	43	453	109 800
294-644621	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1690	SC	53	53	453	109 900
294-654031	EVO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1880	SC	50	50	453	121 800
ECO Narrow												
297-644625	ECO	Narrow	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	790	1690	SC	0	0	440	112 200

Only single cleat in price list, more options available

Long bogie

LONG BOGIE 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
ECO Standard												
297-644023	ECO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	3000	SC	25	25	430	166 000
297-644031	ECO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1890	SC	25	25	430	120 800
297-644626	ECO	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	850	1690	SC	15	15	430	116 900
297-644620	ECO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1690	SC	25	25	430	116 900
297-654030	ECO	Standard	SYM	750-26.5	FKF, TRS, A343, A344	850	1880	SC	30	30	425	120 600
297-673030	ECO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	880	1890	SC	10	10	460	128 200
297-656023	ECO	Standard	SYM	800-26.5	FKF, FKF2, T440, T480, A644	944	1890	SC	27	27	475	125 000
ECO Soft												
227-644030	ECO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1890	SC	63	63	453	133 000
KovaX Narrow												
288-644043	KovaX	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	770	1980	SC	0	0	430	108 000
288-644044	KovaX	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	770	1890	SC	0	0	430	95 900
KovaX Standard												
288-644624	KovaX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1690	SC	25	25	430	101 700
KovaX Soft												
288-644041	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	903	3000	SC	51	51	452	155 500
288-644623	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	950	1690	SC	75	75	475	109 000
288-644042	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	950	1880	SC	75	75	475	117 700
288-644625	KovaX	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	905	1690	SC	42	42	453	105 900
288-644620	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1690	SC	52	52	453	105 900
288-644030	KovaX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	836	1890	SC	0	51	430	108 000
288-644040	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	903	1880	SC	53	53	452	111 600
288-654030	KovaX	Soft	SYM	750-26.5	FKF, TRS, A343, A344	903	1880	SC	52	52	452	121 800
288-673001	KovaX	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	950	1890	SC	40	40	475	123 200
Combination ECO-Baltic Standard												
279-644030	ECO-Baltic	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850/840	1890	SC	25	25	430	126 000
Combination EVO-Baltic Standard												
249-644625	EVO-Baltic	Standard	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	870/860	1690	SC	25	25	440	122 100
249-644030	EVO-Baltic	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840/840	1890	SC	20	20	430	131 400

LONG BOGIE 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
U Standard												
296-644030	U	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1890	SC	30	30	425	120 500
296-654031	U	Standard	SYM	750-26.5	FKF, TRS, A343, A344	850	1890	SC	30	30	425	120 800
U Soft												
296-644031	U	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	924	1890	SC	67	67	462	126 000
Baltic Narrow												
299-644620	Baltic	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	760	1690	SC	0	0	425	114 600
Baltic Standard												
299-656040	Baltic	Standard	SYM	800-26.5	TRS2, A344	935	1690	SC	5	5	485	123 100
299-656031	Baltic	Standard	SYM	800-26.5	TRS2, A344	935	1890	SC	13	13	485	126 000
Baltic Soft												
298-644034	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	921	1890	SC	66	66	461	138 700
298-644005	Baltic	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TIFG	925	1890	SC	15	100	435	138 200
298-644044	Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	925	1890	SC	25	110	425	132 500
298-644040	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	921	3000	SC	65	65	461	173 300
298-644041	Baltic	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1060	3000	SC	65	215	455	189 100
298-644000	Baltic	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1110	1890	SC	110	210	505	157 400
298-644036	Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1000	1890	SC	0	210	435	150 800
298-644042	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1015	3000	SC	108	108	508	186 800
298-644130	Baltic	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1060	1880	SC	60	210	455	144 900
298-644131	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1015	1890	SC	113	113	508	138 300
298-644026	Baltic	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	921	1690	SC	55	55	461	128 800
298-644043	Baltic	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	925	1980	SC	25	110	425	133 700
298-654090	Baltic	Soft	SYM	750-26.5	FKF2	1015	1980	SC	78	78	508	157 200
298-654023	Baltic	Soft	SYM	750-26.5	FKF, TRS, A343, A344	921	1980	SC	70	70	461	138 400
298-656626	Baltic	Soft	ASYM	800-26.5	TRS2, A344	1110	1690	SC	50	150	505	149 100
298-656023	Baltic	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	1015	1890	SC	63	63	508	137 600
298-656030	Baltic	Soft	SYM	800-26.5	TRS2, A344	1015	1890	SC	53	53	508	145 600
CoverX Narrow												
277-644033	CoverX	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	781	1890	SC	0	0	430	132 400
CoverX Soft												
277-644042	CoverX	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1070	1890	SC	65	215	460	163 500
277-644031	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	1020	1890	SC	110	110	510	158 800

Only single cleat in price list, more options available

Long bogie

LONG BOGIE 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
CoverX Soft												
277-644040	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	919	3000	SC	60	60	459,5	189 000
277-644625	CoverX	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	919	1690	SC	50	50	459,5	139 800
277-644030	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	920	1890	SC	60	60	460	147 200
277-644621	CoverX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	919	1690	SC	60	60	459,5	139 800
277-644034	CoverX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	930	1890	SC	25	115	423	148 800
277-644032	CoverX	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	970	1890	SC	60	110	460	156 500
277-644626	CoverX	Soft	ASYM	710-26.5	TRS, TRS2, T440, A344, TIFG	1071	1690	SC	50	200	460	155 100
277-656031	CoverX	Soft	ASYM	800-26.5	FKF, FKF2, T440, T480, A644	1070	1890	SC	65	115	510	163 600
277-656035	CoverX	Soft	SYM	800-26.5	TRS2, A344	1020	1890	SC	55	55	510	158 900
277-656032	CoverX	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	1020	1890	SC	65	65	510	158 600

LONG BOGIE 29 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EVO Standard												
594-673030	EVO	Standard	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	915	1980	SC	23	23	465	139 900
EVO Soft												
594-644021	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1500	SC	53	53	453	113 500

LONG BOGIE 30 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EX Standard												
490-654082	EX	Standard	SYM	750-26.5	FKF2	905	1890	SC	23	23	465,5	147 400
490-654081	EX	Standard	SYM	750-26.5	FKF2	905	1980	SC	17,5	17,5	470,5	148 700
490-663001	EX	Standard	SYM	750-26.5	TRS2	866	1980	SC	8	8	460,5	148 700

LONG BOGIE 30 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EX Standard												
490-663001	EX	Standard	SYM	780-26.5	FKF	866	1980	SC	8	8	460,5	148 700
490-663002	EX	Standard	SYM	750-26.5	TRS2	866	1890	SC	8	8	460,5	147 400
490-663002	EX	Standard	SYM	780-26.5	FKF &	866	1890	SC	8	8	460,5	147 400
OF Soft												
495-644620	OF	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1690	SC	53	53	453	128 300
EVO Soft												
494-654030	EVO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1980	SC	53	53	453	155 500
KovaX Soft												
488-673030	KovaX	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	950	1980	SC	45	45	475	146 700
488-673031	KovaX	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	950	1890	SC	45	45	475	145 500
Baltic Soft												
498-654052	Baltic	Soft	SYM	750-26.5	FKF, TRS, A343, A344	921	1880	SC	66	66	461	149 200
498-654081	Baltic	Soft	ASYM	750-26.5	FKF2	1110	1890	SC	75	175	505	170 700
498-654080	Baltic	Soft	ASYM	750-26.5	FKF2	1110	1980	SC	76	176	505	172 000

LONG BOGIE MAX LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
OF Soft												
395-673030	OF	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	840	1980	SC	0	0	454	148 100
395-673031	OF	Narrow	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	840	1890	SC	0	0	459	146 800
OF Soft												
395-644021	OF	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1890	SC	53	53	453	143 100
395-654030	OF	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1980	SC	58	58	453	148 100
395-654031	OF	Soft	SYM	750-26.5	FKF, TRS, A343, A344	906	1890	SC	48	48	453	148 100
EVO Standard												
394-624041	EVO	Standard	SYM	600-26.5	FKF2, FR, T428, A343	740	1890	SC	15	15	373,5	133 400
394-644032	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1880	SC	20	20	420	136 800
394-644632	EVO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	840	1690	SC	15	15	423,5	129 900

Only single cleat in price list, more options available

Long bogie

LONG BOGIE MAX LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EVO Standard												
394-680030	EVO	Standard	SYM	710-28.5	FKF2	840	1890	SC	12	12	426	154 200
394-654087	EVO	Standard	SYM	750-26.5	FKF2	915	1890	SC	23	23	458	146 400
394-654086	EVO	Standard	SYM	750-26.5	FKF2	915	1980	SC	23	23	458	147 500
EVO Soft												
394-644002	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1880	SC	53	53	453	144 900
394-644005	EVO	Soft	SYM	710-26.5	TRS, TRS2, T440, A344, TIFG	906	1890	SC	43	43	453	144 900
394-644001	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	960	1880	SC	80	80	480	145 400
394-644620	EVO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	906	1690	SC	48	48	453	141 200
394-654030	EVO	Soft	SYM	750-26.5	FKF, TRS, A343, A344	960	1880	SC	75	75	480	146 400
394-673030	EVO	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	960	1980	SC	45	45	480	151 800
394-673031	EVO	Soft	SYM	780-28.5	FKF2, TRS2, T480, A643, A644	960	1890	SC	40	40	480	150 600
394-656030	EVO	Soft	SYM	800-26.5	FKF, FKF2, T440, T480, A644	960	1890	SC	30	30	480	157 100
ECO Soft												
327-644040	ECO	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	916	3000	SC	63	63	458	201 500
KovaX Standard												
388-644040	KovaX	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	850	1880	SC	25	25	425	143 100
KovaX Soft												
388-644042	KovaX	Soft	OSS	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	905	1890	SC	30	75	430	146 800
388-644041	KovaX	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	903	1880	SC	52	52	452	148 100
Baltic Soft												
398-644020	Baltic	Soft	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, A643, A644 TiHF, TiFF, FsB	913	1980	SC	56	56	457	149 500



Conventional tracks™



CONVENTIONAL 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
OF Narrow												
090-624040DB	OF	Narrow	SYM	600-26.5	FKF, FKF2, FR, TRS, TRS2, T428, T440, T480, A343, A344	780	1500	DC	0	0	408	70 700
OF Standard												
090-624040	OF	Standard	SYM	600-26.5	FKF, FKF2, FR, TRS, TRS2, T428, T440, T480, A343, A344	780	1500	SC	13	13	408	67 500
090-653020	OF	Standard	SYM	600-30.5	A331	780	1720	SC	13	13	408	80 500
090-653020	OF	Standard	SYM	650-26.5	ELS, TRS, A343, A344	780	1720	SC	13	13	408	80 500
090-644020	OF	Standard	SYM	710-26.5	FKF, FKF2, TRS, TRS2, FR, ELS, T428, T440, A343, A344, TiHF, TIFF, TiFG, FsB	880	1500	SC	13	13	458	73 900
090-654020	OF	Standard	SYM	710-30.5	T428	880	1720	SC	13	13	458	88 000
090-654020	OF	Standard	SYM	750-26.5	FKF, TRS, A343, A344	880	1720	SC	13	13	458	88 000
Combination OF-U Narrow												
091-654020	OF-U	Narrow	SYM	710-30.5	T428	855	1720	SC	0	0	458	94 500
091-654020	OF-U	Narrow	SYM	750-26.5	FKF, TRS, A343, A344	855	1720	SC	0	0	458	94 500
Combination OF-U Standard												
091-624040	OF-U	Standard	SYM	600-26.5	FKF, FKF2, FR, TRS, TRS2, T428, T440, T480, A343, A344	780/730	1500	SC	18	18	395	73 900
091-653020	OF-U	Standard	SYM	600-30.5	A331	766	1720	SC	6	6	408	85 600
091-653020	OF-U	Standard	SYM	650-26.5	ELS, TRS, A343, A344	766	1720	SC	6	6	408	85 600
091-644020	OF-U	Standard	SYM	710-26.5	FKF, FKF2, TRS, TRS2, FR, ELS, T428, T440, A343, A344, TiHF, TIFF, TiFG, FsB	880	1500	SC	13	13	458	78 300
091-680020	OF-U	Standard	SYM	710-28.5	FKF2	880	1720	SC	13	13	458	90 000
U Narrow												
092-644020	U	Narrow	SYM	710-26.5	FKF, FKF2, TRS, TRS2, FR, ELS, T428, T440, A343, A344, TiHF, TIFF, TiFG, FsB	854	1500	SC	0	0	458	81 400
092-654020	U	Narrow	SYM	750-26.5	FKF, TRS, A343, A344	854	1720	SC	0	0	458	96 100
U Standard												
092-640020	U	Standard	SYM	600-22.5	FKF2, TRS, TRS2, T428, A344	766	1300	SC	6	6	408	68 500
092-624040	U	Standard	SYM	600-26.5	FKF, FKF2, FR, TRS, TRS2, T428, T440, T480, A343, A344	730	1500	SC	13	13	365	76 100


CONVENTIONAL 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
OF-U Standard												
291-644020	OF-U	Standard	SYM	710-26.5	FKF, FKF2, TRS, TRS2, FR, ELS, T428, T440, A343, A344, TiHF, TIFF, TiFG, FsB	890	1500	SC	18	18	458	89 700
291-654020	OF-U	Standard	SYM	710-30.5	T428	890	1720	SC	18	18	458	102 100
291-654020	OF-U	Standard	SYM	750-26.5	FKF, TRS, A343, A344	890	1720	SC	18	18	458	102 100

Only single cleat in price list, more options available

CTL Wheel Tracks™

EX



OF




EVO




ECO



BALTIC



KOVAX




LITE



Reduced dimension and weight
of the cross member


BALTIC – CTL

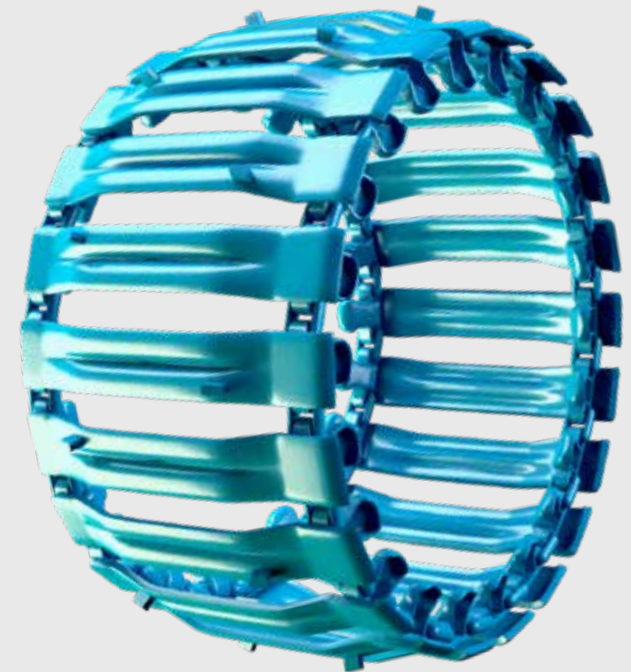


WHEEL TRACK 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EX Narrow												
093-658038	EX	Narrow	SYM	710/70-34	FR, TRS2+	774	N/A	DC	0	0	410	76 500
EX Standard												
093-625002	EX	Standard	SYM	600-34	FR, TRS2+	774	N/A	DC	32	32	387	58 700
093-628044	EX	Standard	SYM	700/55-34	TRS	866	N/A	DC	33	33	433	66 600
093-658023	EX	Standard	SYM	700/70-34	TRS	866	N/A	DC	28	28	435	78 000
093-628040	EX	Standard	SYM	710/55-34	T422	866	N/A	DC	13	13	450	66 600
093-628028	EX	Standard	SYM	710/55-34	FR, TRS2+	866	N/A	DC	23	23	440	66 600
093-658028	EX	Standard	SYM	710/70-34	FR, TRS2+	866	N/A	DC	23	23	440	77 900
093-658027	EX	Standard	SYM	750-34	T422	905	N/A	DC	47	47	453	81 000
OF Narrow												
093-628051	OF	Narrow	SYM	710/55-34	TRS	780	N/A	DC	0	0	430	74 200
OF Standard												
093-625006	OF	Standard	SYM	600-34	FR, TRS2+	750	N/A	DC	20	20	375	71 500
093-658024	OF	Standard	SYM	700/70-34	TRS	840	N/A	DC	15	15	435	72 800
093-658030	OF	Standard	SYM	700/70-34	TRS	840	N/A	DC	10	10	435	74 000
093-658046	OF	Standard	SYM	710/70-34	FR, TRS2+	840	N/A	DC	10	10	440	75 400
093-654023	OF	Standard	SYM	750-26.5	FKF, TRS, A343, A344	840	N/A	DC	15	15	435	72 800
EVO Standard												
093-628054	EVO	Standard	SYM	710/55-34	TRS	865	N/A	DC	32	32	433	62 200
EVO-L Standard												
093-625000	EVO	Lite	SYM	600-34	FR, TRS2+	740	N/A	DC	15	15	385	58 300
093-625003	EVO	Lite	SYM	600-34	T422	740	N/A	DC	15	15	385	61 000
093-625001	EVO	Lite	SYM	600-34	FR, TRS2+	740	N/A	DC	15	15	385	61 000
093-628033	EVO	Lite	SYM	700/55-34	TRS	864	N/A	DC	32	32	432	59 500
093-658032	EVO	Lite	SYM	700/70-34	TRS	865	N/A	DC	28	28	435	64 700
093-658033	EVO	Lite	SYM	700/70-34	TRS	865	N/A	DC	28	28	433	64 700
093-628031	EVO	Lite	SYM	710/55-34	FR, TRS2+	864	N/A	DC	22	22	440	59 500
093-628036	EVO	Lite	SYM	710/55-34	T422	865	N/A	DC	13	13	450	59 500
093-658031	EVO	Lite	SYM	710/70-34	FR, TRS2+	865	N/A	DC	23	23	440	63 400
093-658034	EVO	Lite	SYM	710/70-34	FR, TRS2+	865	N/A	DC	23	23	433	72 500
093-658036	EVO	Lite	SYM	750-34	T422	865	N/A	DC	28	28	433	73 200

EX



OF




EVO




ECO



Baltic



KovaX



NARROW CROSS MEMBER



STANDARD CROSS MEMBER



SOFT CROSS MEMBER



CTL WHEEL TRACK 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
ECO Narrow												
093-625005	ECO	Narrow	SYM	600-34	FR, TRS2+	774	N/A	DC	0	0	355	66 500
093-653022	ECO	Narrow	SYM	650-26.5	TRS, ELS, A343, A344	670	N/A	DC	0	0	375	65 900
093-628026	ECO	Narrow	SYM	710/55-34	T422	810	N/A	DC	0	0	450	66 500
093-658039	ECO	Narrow	SYM	710/70-34	FR, TRS2+	790	N/A	DC	0	0	440	81 400
093-644023	ECO	Narrow	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, TiHF, TiFF, FsB	765	N/A	DC	0	0	425	59 000
ECO Standard												
093-658050	ECO	Standard	SYM	700/70-34	FR	850	N/A	DC	15	15	440	86 100
093-658045	ECO	Standard	SYM	700/70-34	TRS	850	N/A	DC	20	20	435	81 500
093-628037DB	ECO	Standard	SYM	710/55-34	FR, TRS2+	850	N/A	DC	15	15	440	74 600
093-644021	ECO	Standard	SYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, TiHF, TiFF, FsB	859	N/A	DC	35	35	430	81 000
ECO Soft												
093-628039	ECO	Soft	SYM	710/55-34	FR, TRS2+	916	N/A	DC	53	53	458	81 500
ECO Wide												
093-628032DB	ECO	Wide	SYM	710/55-34	FR, TRS2+	943	N/A	DC	15	15	410	92 600
ECO L												
093-628021	ECO	Lite	SYM	700/55-34	TRS	916	N/A	DC	58	58	458	94 000
KovaX Standard												
093-628056	KovaX	Standard	SYM	710/55-34	FR, TRS2+	850	N/A	DC	15	15	425	73 700
093-658029	KovaX	Standard	SYM	710/70-34	FR, TRS2+	850	N/A	DC	15	15	425	84 000
KovaX Soft												
093-628049	KovaX	Soft	OSS	710/55-34	FR, TRS2+	905	N/A	DC	20	65	430	71 500
093-628046	KovaX	Soft	OSS	710/55-34	T422	875	N/A	DC	0	55	420	61 600
093-628045	KovaX	Soft	OSS	710/55-34	FR, TRS2+	875	N/A	DC	0	65	410	61 600
093-658047	KovaX	Soft	OSS	710/70-34	FR, TRS2+	905	N/A	DC	20	65	430	87 700
Combination OF-Baltic Soft												
093-658026	OF-Baltic	Soft	SYM	700/70-34	TRS	850/770	N/A	DC	25	25	425	86 600
Baltic Narrow												
093-628042	Baltic	Narrow	SYM	710/55-34	T422	830	N/A	DC	0	0	445	81 000
Baltic Standard												
093-654024	Baltic	Standard	SYM	750-26.5	FKF, TRS, A343, A344	815	N/A	DC	8	8	430	76 400

CTL WHEEL TRACK 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
Baltic Soft												
093-625004	Baltic	Soft	OSS	600-34	FR, TRS2+	800	N/A	DC	0	101	355	68 500
093-653023	Baltic	Soft	OSS	650-26.5	TRS, ELS, A343, A344	800	N/A	DC	9	101	374	61 600
093-628038VB	Baltic	Soft	OSS	700/55-34	TRS	1000	N/A	RC	0	200	425	101 300
093-628022OB	Baltic	Soft	OSS	700/55-34	TRS	925	N/A	NC	17	108	420	90 400
093-628020	Baltic	Soft	SYM	700/55-34	TRS	913	N/A	DC	57	57	457	90 400
093-628022	Baltic	Soft	OSS	700/55-34	TRS	925	N/A	DC	17	108	420	90 400
093-628038	Baltic	Soft	OSS	700/55-34	TRS	1000	N/A	DC	0	200	425	97 700
093-658025	Baltic	Soft	OSS	700/70-34	TRS	925	N/A	DC	17	108	417	93 000
093-628041	Baltic	Soft	OSS	710/55-34	FR, TRS2+	1000	N/A	DC	0	200	425	92 600
093-628034	Baltic	Soft	OSS	710/55-34	T422	925	N/A	DC	10	85	435	91 500
093-628024	Baltic	Soft	OSS	710/55-34	T422	925	N/A	DC	8	87	435	93 000
093-628030	Baltic	Soft	OSS	710/55-34	FR, TRS2+	925	N/A	DC	12	103	425	91 800
093-628035	Baltic	Soft	ASYM	710/55-34	FR, TRS2+	1060	N/A	DC	50	200	455	100 900
093-628029	Baltic	Soft	SYM	710/55-34	FR, TRS2+	913	N/A	DC	52	52	457	91 800
093-628053	Baltic	Soft	SYM	710/55-34	FR, TRS2+	1015	N/A	DC	103	103	508	96 900
093-644024	Baltic	Soft	ASYM	710-26.5	FKF, FKF2, FR, ELS, T428, T480, A342, A343, TiHF, TiFF, FsB	920	N/A	DC	20	103	417	73 100
093-644022	Baltic	Soft	OSS	710-26.5	TRS, TRS2, T440, A344, TIFG	925	N/A	DC	12	103	417	73 300
093-654030	Baltic	Soft	ASYM	750-26.5	FKF, TRS, A343, A344	1060	N/A	DC	60	210	455	94 500
093-663001	Baltic	Soft	OSS	750-26.5	TRS2 Only	1035	N/A	DC	10	185	430	106 500
093-654022OB	Baltic	Soft	OSS	750-26.5	FKF, TRS, A343, A344	925	N/A	NC	22	113	417	90 400
093-654022	Baltic	Soft	OSS	750-26.5	FKF, TRS, A343, A344	925	N/A	DC	22	113	417	90 400
093-663000	Baltic	Soft	OSS	750-26.5	TRS2, T480	925	N/A	DC	0	94	440	90 400
093-663000	Baltic	Soft	OSS	780-26.5	FKF	925	N/A	DC	0	94	440	90 400

CTL WHEEL TRACK 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
EVO Narrow												
293-658030DB	EVO	Narrow	SYM	710/70-34	FR, TRS2+	800	N/A	DC	0	0	410	79 600
Combination EVO-Baltic Narrow												
293-658029DB	EVO-Baltic	Narrow	SYM	710/70-34	FR, TRS2+	775/770	N/A	DC	0	0	425	81 000
293-658026DB	EVO-Baltic	Narrow	SYM	710/70-34	FR, TRS2+	775	N/A	DC	0	0	425	80 200
293-628021DB	EVO-Baltic	Narrow	SYM	710/55-34	FR, TRS2+	775/770	N/A	DC	0	0	425	71 200
293-658026	EVO-Baltic	Narrow	SYM	710/70-34	FR, TRS2+	775	N/A	SC	0	0	425	76 400
Combination EVO-Baltic Standard												
293-658028DB	EVO-Baltic	Standard	SYM	710/70-34	FR, TRS2+	840	N/A	DC	10	10	440	81 000
KovaX Soft												
293-654025	KovaX	Soft	OSS	750-26.5	FKF, TRS, A343, A344	875	N/A	DC	10	65	410	62 800
Baltic Soft												
293-654022	Baltic	Soft	OSS	750-26.5	FKF, TRS, A343, A344	925	N/A	DC	22	105	420	91 500



Skidder Wheel Tracks™



SKIDDER WHEEL TRACK 22 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
ECO Standard												
193-660020	ECO	Standard	SYM	35.5-32	TRS, LK, Firestone	1012	N/A	DC	3	3	583	81 000


SKIDDER WHEEL TRACK 26 MM LINK SYSTEM

Part number	Name	Version	Position	Tire size	Tire	Cross member length mm	Bogie CC distance mm	Cleat	In mm	Out mm	CC-In mm	SEK
OF Standard												
293-654020	OF	Standard	SYM	750-26.5	FKF, TRS, A343, A344	890	N/A	DC	18	18	458	74 700
ECO Standard												
293-626040	ECO	Standard	SYM	24.5-32	Firestone	840	N/A	DC	15	15	435	68 500
293-628020	ECO	Standard	SYM	28L-26	TRS, LK, Firestone	966	N/A	DC	5	5	485	65 400
293-627020	ECO	Standard	SYM	30.5-32	LK, Firestone	966	N/A	DC	8	8	505	76 800
293-660020	ECO	Standard	SYM	35.5-32	TRS, LK, Firestone	1112	N/A	DC	11	11	575	88 500



PRO-GRIP™

U-TS™

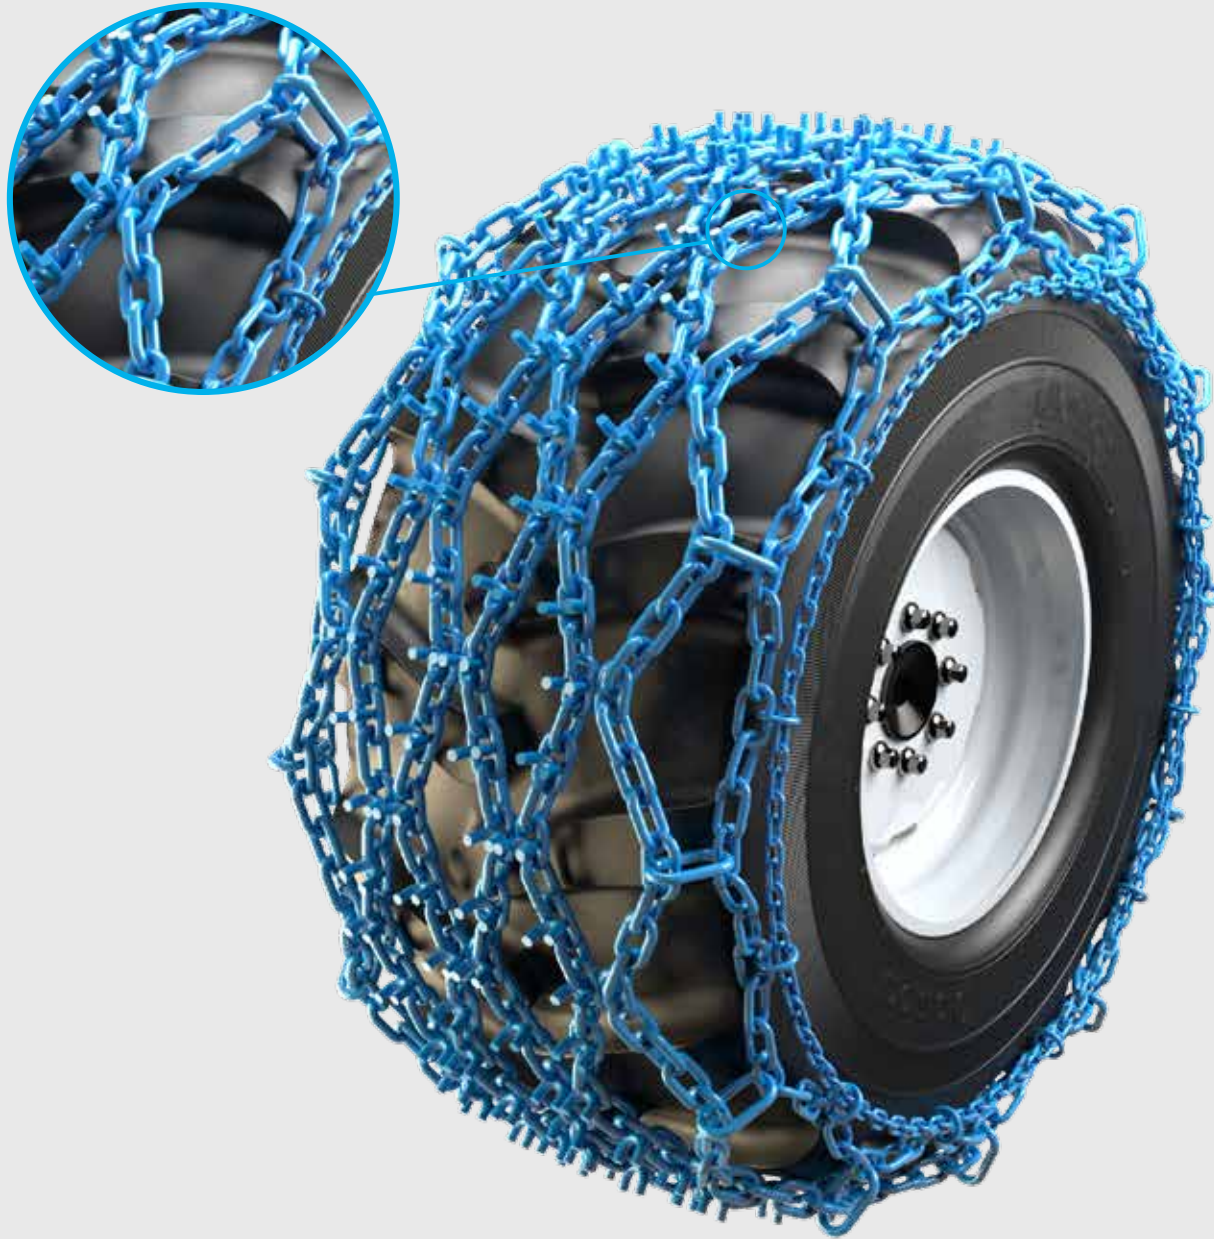

PRO-GRIP U-TS


Tire size	Extra info	Tire model/No	Link system	Version	Stud	Part number	SEK
23,1-26	tightening rail		16 mm	Chain	19 mm	716-631020	30 200
23,1-26	tightening rail	TRS, FIRESTONE	16 mm	Chain	19 mm	716-621345	28 000
24,5-32/21,3-34		A345	16 mm	Chain	19 mm	716-626040	32 700
30,5-32		LK, FIRESTONE	16 mm	Chain	19 mm	716-627020	33 500
30,5-32			19 mm	Chain	19 mm	719-627020	49 100
600-22,5	tightening rail	TRS, TRS2, ELS, A331, A343, A344	13 mm	Chain	16 mm	713-640020	18 400
600/65-34		A342, A343, A344, T428	13 mm	Chain	16 mm	713-625020	23 600
600/65-34		FKF	16 mm	Chain	19 mm	716-625020	36 800
650-24,5		FR, A342, A343, A344	13 mm	Chain	16 mm	713-662020	18 700
650-26,5		ELS	16 mm	Chain	19 mm	716-653020	30 800
710-22,5		FKF, TRS, ELS2, A331, A343, A344	16 mm	Chain	19 mm	716-652045	26 000
710-22,5	tightening rail	ELS, FKF, FKF2	13 mm	Chain	16 mm	713-652020	18 800
710-26,5	tightening rail	FKF, FKF2, TRS2	19 mm	Chain	19 mm	719-644020	43 100
710-26,5	tightening rail	FKF, FKF2, TRS2, T422	16 mm	Chain	19 mm	716-644020	31 900
700/55-34	tightening rail	TRS2, A346	16 mm	Chain	19 mm	716-628020	38 900
700/55-34	tightening rail	TRS2, A346	13 mm	Chain	16 mm	713-628020	26 600
700/70-34	tightening rail	TRS, FR, TRS2+	13 mm	Chain	16 mm	713-658020	29 600
700/70-34	tightening rail	TRS, FR, TRS2+	16 mm	Chain	19 mm	716-658020	41 100
710-22,5		FKF, FKF2	13 mm	Chain	16 mm	713-652030	25 400
710-24,5	tightening rail	TRS2, A346, FKF2, T428	16 mm	Chain	19 mm	716-661020	28 200
710-24,5		TRS2, T428, T440, T480, A344	13 mm	Chain	16 mm	713-661000	20 800
710-26,5	tightening rail	T422	19 mm	Chain	19 mm	719-644422	43 100
710-26,5	tightening rail	FKF, FKF2, T428, T480, A342	13 mm	Chain	16 mm	713-644020	24 000
710-28,5		FKF	16 mm	Chain	19 mm	716-680020	41 200
710/55-34	tightening rail	T422, FR, TRS2+	16 mm	Chain	19 mm	716-628422	41 300
750-26,5	tightening rail	TRS2, A346, T422, FR, TRS2+	19 mm	Chain	19 mm	719-658422	54 100
750-26,5	tightening rail	FKF2, TRS2, A331, A342, A343, A344	16 mm	Chain	19 mm	716-654020	35 700
750-26,5	tightening rail	FKF2, TRS2, A331, A342, A343, A344	19 mm	Chain	19 mm	719-654020	42 500
780-28,5		FKF	16 mm	Chain	19 mm	716-673000	39 800
800-26,5		FKF, FKF2	13 mm	Chain	16 mm	713-656020	23 600
800-26,5		FKF	16 mm	Chain	19 mm	716-656020	30 200

PRO-GRIP U

Tire size	Extra info	Tire model/No	Link system	Version	Stud	Part number	SEK
600-26,5		FKF2, TRS2, A331, A342, A343, A344	13 mm	Chain	16 mm	713-624020	23 300
600-26,5		FKF, TRS2, A331, A342, A343, A344	16 mm	Chain	19 mm	716-624020	28 700
35,5-32			19 mm	Chain	19 mm	719-660020	61 800

PRO-GRIP™

F™

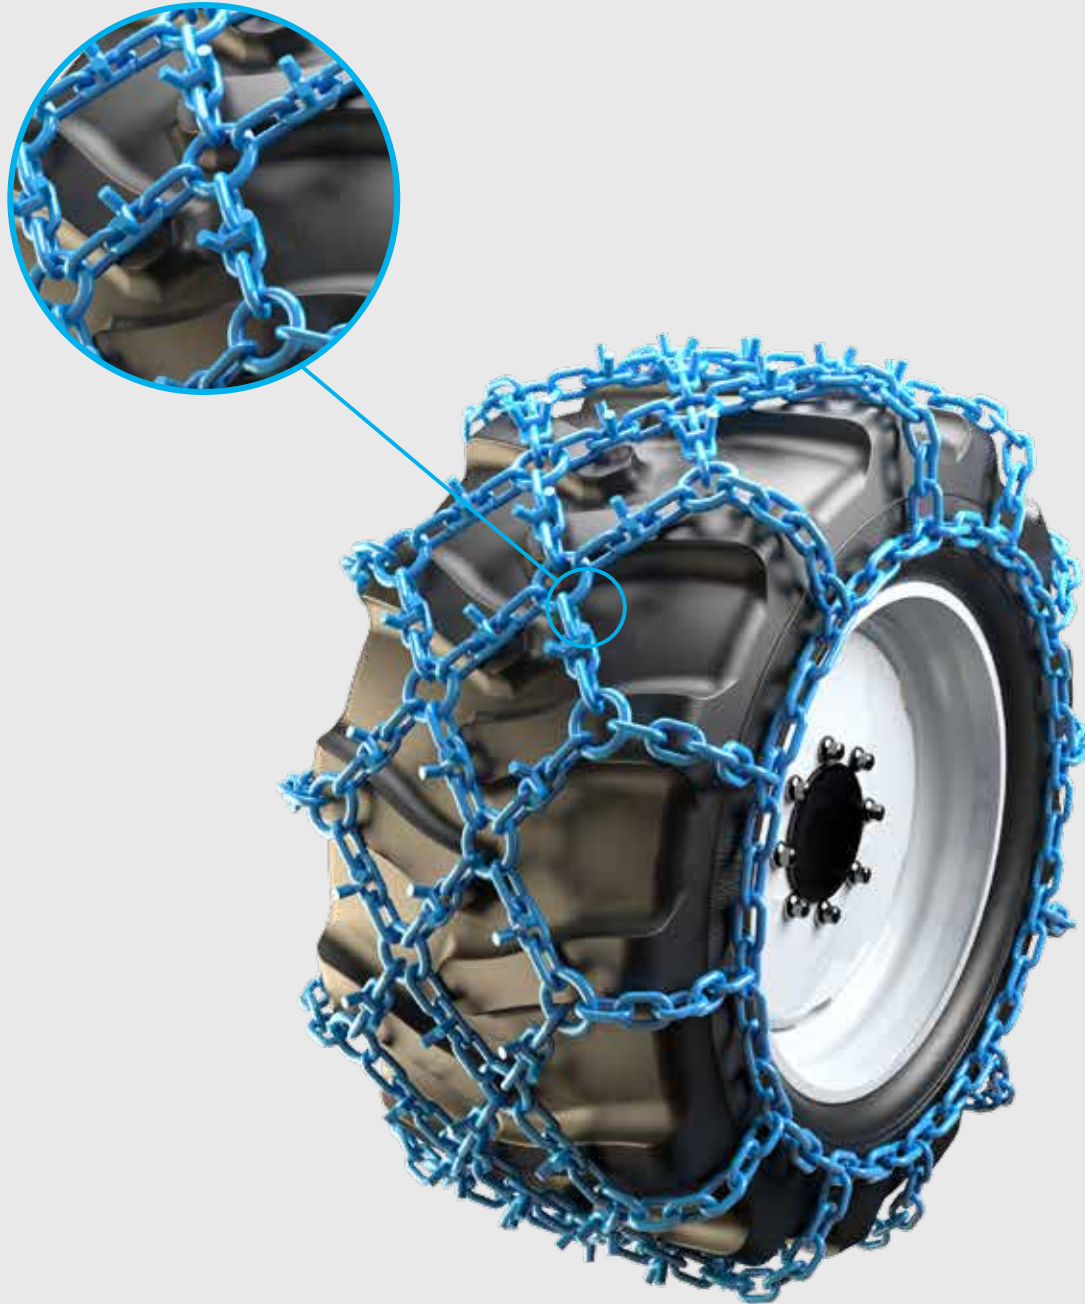


PRO-GRIP F

Tire size	Extra info	Tire model/No	Link system	Version	Stud	Part number	SEK
30,5-32			19 mm	Chain	19 mm	717-627020	47 600
35,5-32			19 mm	Chain	19 mm	717-660020	57 000
600-26,5	tightening rail	FKF2, TRS2, A331, A342, A343, A344	16 mm	Chain	19 mm	717-624020	24 200
600/65-34		FKF	16 mm	Chain	19 mm	717-625020	26 500
710-22,5	tightening rail	ELS, FKF	16 mm	Chain	19 mm	717-652040	18 800
710-26,5	tightening rail	FKF, FKF2, TRS2, T422	16 mm	Chain	19 mm	717-644020	24 300
700/70-34		TRS, FR, TRS2+	16 mm	Chain	19 mm	717-658020	32 000
700/55-34		TRS2, A346, T422, FR, TRS2+	16 mm	Chain	19 mm	717-628020	27 200
710-24,5	tightening rail	TRS2, A346	16 mm	Chain	19 mm	717-661020	22 400
710-28,5			16 mm	Chain	19 mm	717-680020	26 000
710/55-34		TRS2, A346, T422, FR, TRS2+	16 mm	Chain	19 mm	717-628422	27 400
750/45-30,5	tightening rail		16 mm	Chain	19 mm	717-654060	27 500
750-26,5	tightening rail	FKF2, TRS2, A331, A342, A343, A344	16 mm	Chain	19 mm	717-654020	27 500
750/65-34		FKF, FKF2, TRS2, T422	16 mm	Chain	19 mm	717-683020	33 700
780-28,5	tightening rail	FKF	16 mm	Chain	19 mm	717-663000	29 200

PRO-GRIP™

SF™

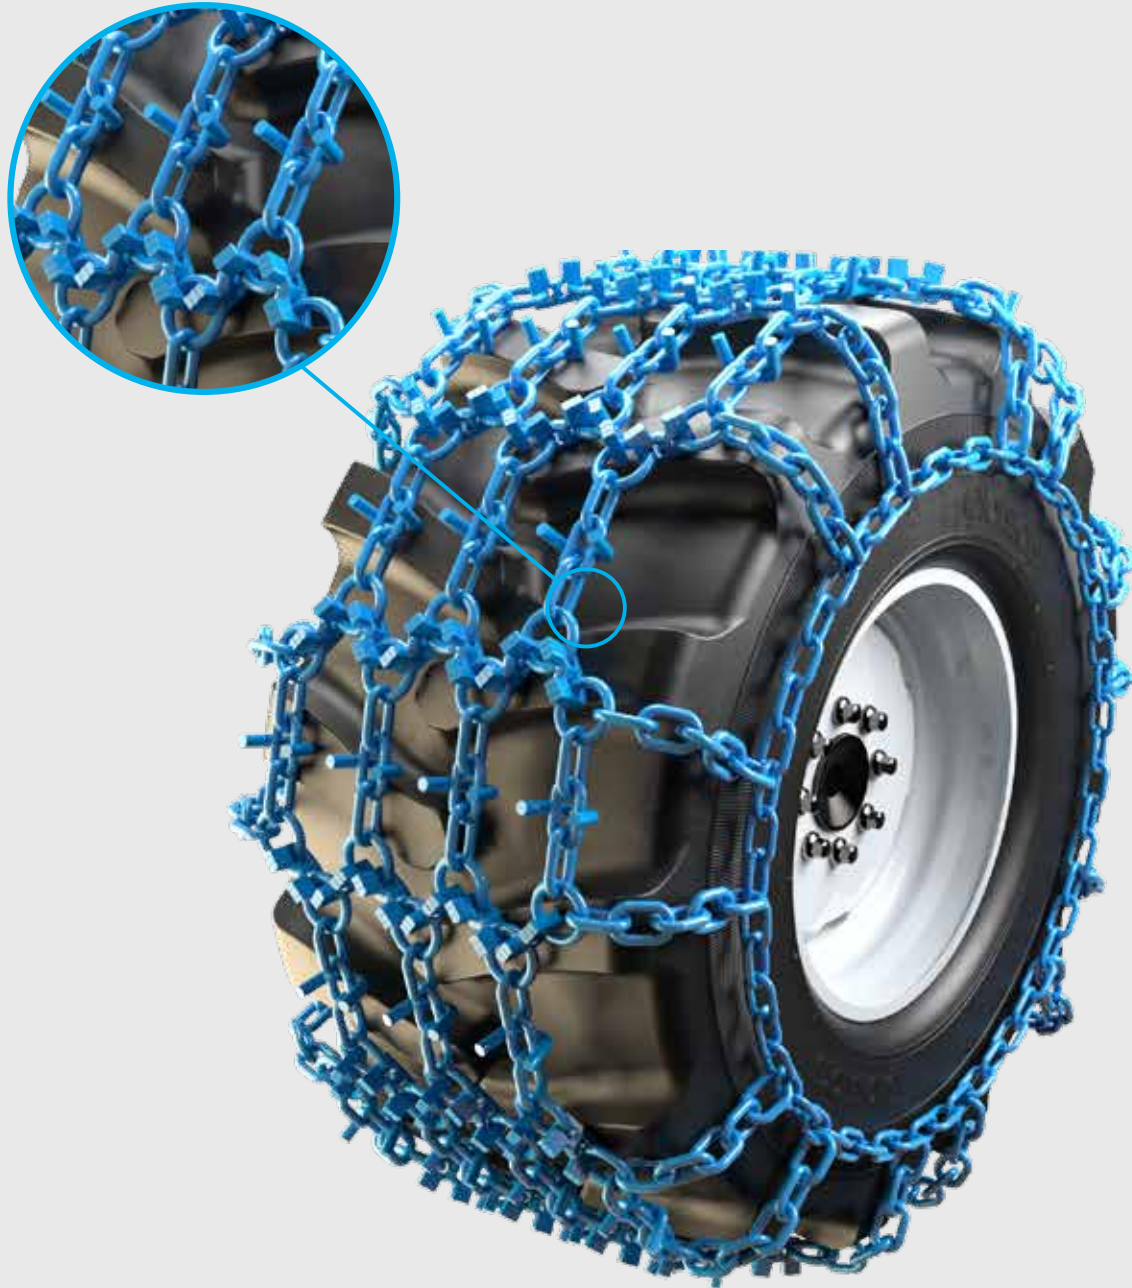


PRO-GRIP SF

Tire size	Extra info	Tire model/No	Link system	Version	Stud	Part number	SEK
600-26,5		FKF2, TRS2, A331, A342, A343, A344	16 mm	Chain	19 mm	711-624020	34 200
700/70-34		TRS	16 mm	Chain	19 mm	711-658020	43 600
710-24,5		FKF, FKF2, A343	16 mm	Chain	19 mm	711-661020	36 900
710-26,5		FKF, FKF2, TRS2, T422	16 mm	Chain	19 mm	711-644020	37 600
710/55-34		TRS2, A346, T422, FR	16 mm	Chain	19 mm	711-628422	45 600
710/70-34		TRS	16 mm	Chain	19 mm	711-684020	43 600
750-26,5		FKF2, TRS2, A331, A342, A343, A344	16 mm	Chain	19 mm	711-663020	44 000
780-28,5		FKF	16 mm	Chain	19 mm	711-673020	44 700
800-26,5		FKF	16 mm	Chain	19 mm	711-668020	43 300

PRO-GRIP™

G™

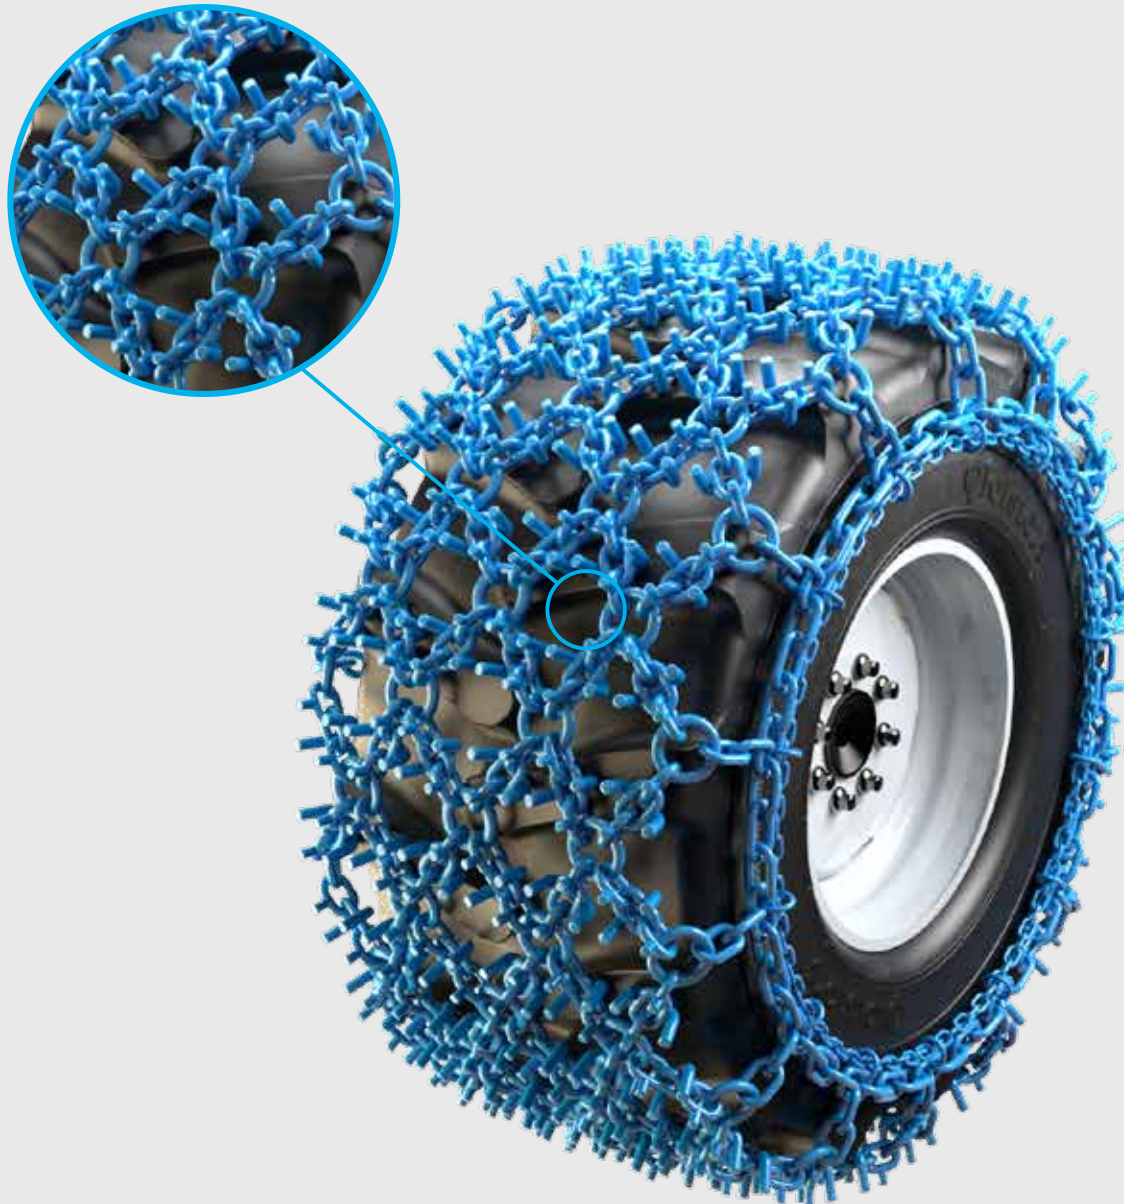


PRO-GRIP G

Tire size	Extra info	Tire model/No	Link system	Version	Stud	Part number	SEK
600-26,5		FKF2, TRS2, A331, A342, A343, A344	16 mm	Chain	19 mm	720-624020	34 200
700/70-34		TRS, FR, TRS2+	16 mm	Chain	19 mm	720-658020	51 600
710-26,5		FKF, FKF2, TRS2, T422	16 mm	Chain	19 mm	720-644020	37 600
710/55-34		TRS2, A346, T422, FR, TRS2+	16 mm	Chain	19 mm	720-628422	45 600
710/70-34		TRS	16 mm	Chain	19 mm	720-658021	56 500
750-26,5		FKF2, TRS2, A331, A342, A343, A344	16 mm	Chain	19 mm	720-654020	44 000
780-28,5		FKF	16 mm	Chain	19 mm	720-673020	44 700
800-26,5		FKF	16 mm	Chain	19 mm	720-656020	43 300

PRO-GRIP™

RC™

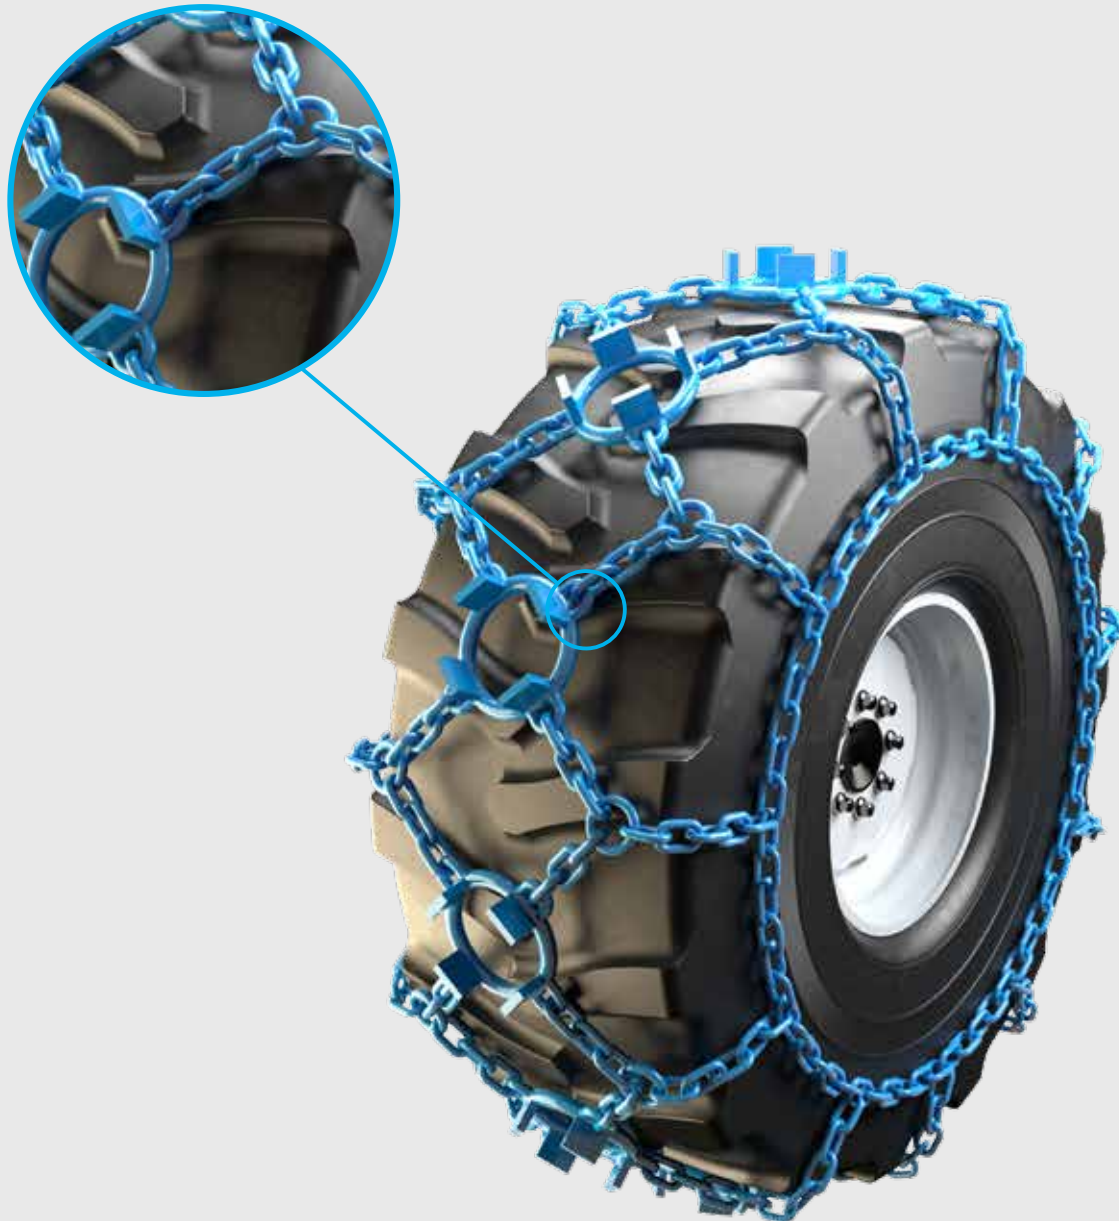


PRO-GRIP RC

Tire size	Link system	Cleat	Track type	Part number	SEK
23,1-26	16 mm	30	Chain	723-631020	20 900
24,5-32	16 mm	30	Chain	723-626020	28 500
24,5-32	19 mm	32	Chain	723-626021	43 900
30,5-32	16 mm	30	Chain	723-627020	30 700
30,5-32	19 mm	32	Chain	723-627022	45 700
30,5-32	22 mm	32	Chain	723-627021	52 500

Parts

PARTS FOR CHAINS

Description	Part no.	Pict no.	SEK
Tightening Chain 26.5 rims	616-624333		1 250
Wheel Chain Attachment 22,5 (Pair)	635-225000	1	3 150
Wheel Chain Attachment 24,5 (Pair)	635-245000	1	3 255
Wheel Chain Attachment 26,5 (Pair)	635-265000	1	3 360
Wheel Chain Attachment 28,5 (Pair)	635-285000	1	3 570
Mounting tool Chain	635-475040	2	2 730
Pin connector tool (For 13 - 22 mm pin)	635-475032	3	315
Coupling no. 13 - 16 mm	953-530296	4	105
Coupling no. 16 - 19 mm	953-530297	5	158
Coupling no. 19 - 22 mm	953-530298	6	210
Schackle no. 13	953-530341	7	26
Schackle no. 16	953-530345	8	47

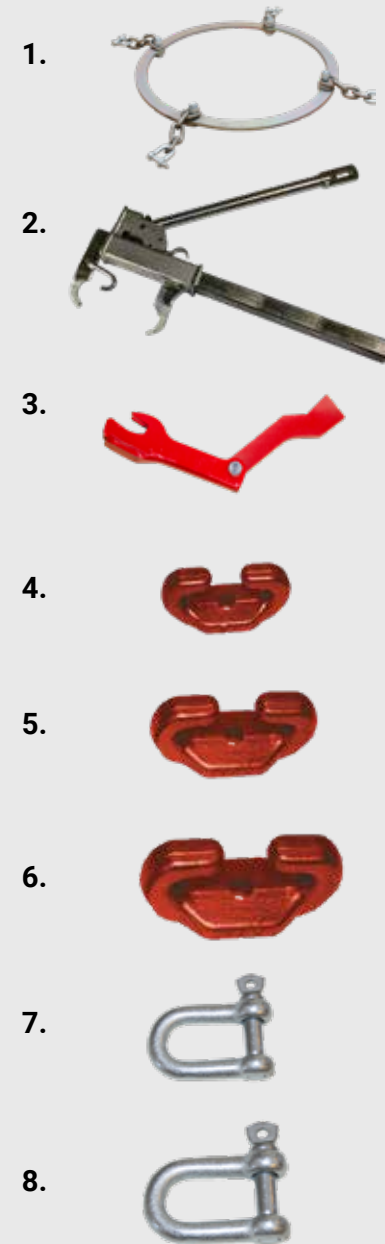


PARTS FOR TRACKS

Description	Part no.	Pict no.	SEK
Track Lock 22x90	022-357300	1	441
Track Lock 22x135	022-357310	2	473
Track Lock 22x185	022-357320	3	504
Track Lock 26x105	025-486845	4	462
Track Lock 26x155	025-486855	5	504
Track Lock 26x205	025-486865	6	557
Track Lock 28x125	030-361700	7	599
Track Lock 28x175	030-361710	8	704
Track Lock 28x225	030-361720	9	924
Track Lock Extension Ø 22 mm 100x50x40	022-483170	10	189
Track Lock Extension Ø 26 mm 120x50x45	025-483175	10	231
Cleat 45x20 H=27	017-462750	11	18
Cleat 45x15 H=30	018-451510	11	16
Cleat 50x30 H=63	022-415710	11	37
Cleat 45x20 H=35	022-415720	11	20
Cleat 65x60 H=27	022-483156	13	63
Cleat 50x30 H=35	022-488200	11	30
Cleat 50x30 H=50	022-488205	11	32
Cleat 45x20 H=45	025-479630	11	28
Cleat 45x20 H=30 weld on cleat	022-415725	12	37
Cleat 50x30 H=35 weld on cleat	022-488215	12	37
Kit			
Kit 80 pcs Cleat 50x30 H=63	037-415710	11	2 940
Kit 80 pcs Cleat 45x20 H=35	037-415720	11	1 596
Kit 80 pcs Cleat 45x15 H=30	037-451510	11	1 260
Kit 80 pcs Cleat 45x20 H=27	037-462750	11	1 428
Kit 80 pcs Cleat 45x20 H=45	037-479630	11	2 268
Kit 80 pcs Cleat 50x30 H=35	037-488200	11	2 436
Kit 80 pcs Cleat 50x30 H=50	037-488205	11	2 520
Kit 80 pcs Cleat 45x20 H=30 weld on	037-415725	12	2 940
Kit 80 pcs Cleat 50x30 H=35 weld on	037-488215	12	2 940

RECOMMENDED CLEATS TO TRACK TYPES

Description	Part no.	
ECO, EX	022-415720	11
ECO, EX, 30 mm link system	022-483156	13
OF	022-488200	11
EVO, KovaX, Baltic, CoverX, PRO	022-488205	11

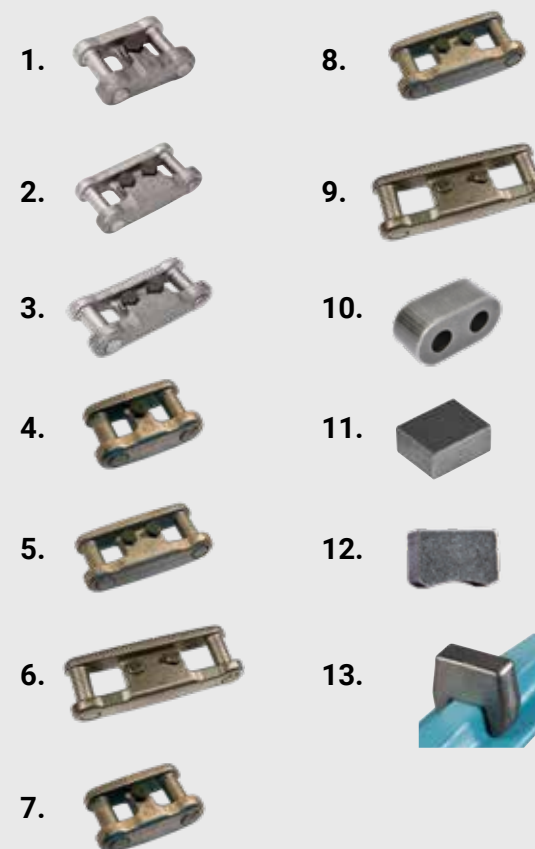

Parts

PARTS FOR TRACKS

Description	Part no.	Pict no.	SEK
Chain (Pair)	035-310651	1	966
Skidder Wheel Track	035-481970	2	1 502
CTL Wheel Track	036-495100	3	8 337
ECO	036-468510	4	4 410
OF	036-468511	5	4 410
U	036-468513	6	4 410
Baltic	036-468514	7	4 410
EVO	036-468518	8	4 410
EX	036-490740	9	4 410
KovaX	036-468250	10	4 410
CoverX	036-468260	11	4 410
CoverX M	036-468270	12	4 883
Spare U clamp (price per each)	035-470130	13	147

1.



2.



3.



4.



5.



6.



7.



8.



9.



10.



11.



12.



13.



PARTS FOR TRACKS

Description	Part no.	Pict no.	SEK
Base unit with casing. Note: Excluding jaws	035-489400	13	9 240
ECO	035-489410	14	2 205
OF	035-489420	15	2 520
Baltic	035-489430	16	2 205
U	035-489440	17	2 205
EVO	035-489470	18	2 520
EX	035-489480	19	2 625
KovaX	035-489450	20	2 520
CoverX	035-489520	21	2 520
Extensioner for tool	035-489398		462

Note: Max input torque 14 nm

13.



14.



15.



16.



17.



18.



19.



20.




21.



PARTS FOR TRACKS

Description	Part no.	Pict no.	SEK
Base unit. Note: Excluding jaws	035-489405	1	4 410
ECO	035-489415	2	2 205
OF	035-489425	3	2 520
Baltic	035-489435	4	2 205
U	035-489445	5	2 205
EVO	035-489475	6	2 520
EX	035-489485	7	2 625
KovaX	035-489455	8	2 520
CoverX	035-489525	9	2 520

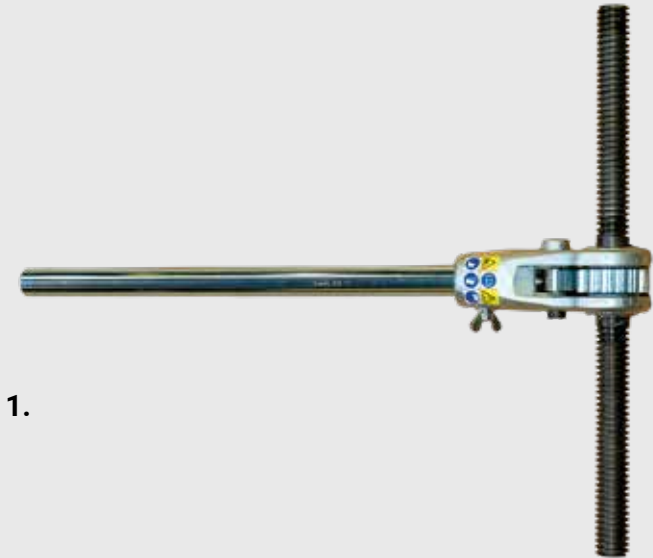

Note: Left jaw is black



Links & Link hooks

Side support



22, 26 & 29 mm

A



30 mm

B



Max

C



Degree angle 35°




Degree angle 17°

Link



Link hook



22 MM LINK SYSTEM

Description	Part no.	Picture	*Side support	SEK
Side support	017-253004	A	35	147
Link hook	022-450138			126
Link	022-462545			137
Link hook	022-450136			126
Link	022-415390			137
Side support	017-253007	A	17	104
Link hook	022-450138			126
Link	022-462545			137
Link hook	022-450136			126
Link	022-415390			137
Side support	017-253014	A	35	189
Link hook	022-450138			126
Link	022-462545			137
Side support	017-253017	A	17	140
Link hook	022-450138			126
Link	022-462545			137

26 mm Link system

Description	Part no.	Picture	*Side support	SEK
Side support	017-253004	A	35	147
Link hook	025-356088			189
Link	025-469000			158
Side support	017-253014	A	35	189
Link hook	025-356088			189
Link	025-469000			158
Side support	017-253007	A	17	104
Link hook	025-356088			189
Link	025-469000			158
Side support	017-253017	A	17	140
Link hook	025-356088			189
Link	025-469000			158

29 MM LINK SYSTEM

Description	Part no.	Picture	*Side support	SEK
Side support	017-253007	A	17	104
Link hook	029-200100			224
Link	029-200000			189
Side support	017-253014	A	35	189
Link hook	029-200101			210
Link	029-200000			189
Side support	017-253017	A	17	140
Link hook	029-200100			224
Link	029-200000			189

30 MM LINK SYSTEM

Description	Part no.	Picture	*Side support	SEK
Side support	025-253775	B	35	300
Link hook	030-360720			300
Link	030-360730			242

MAX LINK SYSTEM

Description	Part no.	Picture	*Side support	SEK
Side support	025-253785	B	35	231
Link hook	025-477047			130
Link	025-469000			158
Side support	025-253800	C	35	263
Link hook	025-477050			137
Link	025-469000			158

Customer Service

Olofsfors AB

Address: Olofsfors 11
SE-914 91 Nordmaling
Sweden

Phone: +46 930-311 40

E-mail: order@olofsfors.se

Opening hours:

Monday-thursday 07:30-16:00 Local time

Friday 07:30-15:00 Local time

Lunch hour 12:00-13:00 Local time

Olofsfors Inc

Address: 121 Roy Blvd., Unit 4
Brantford, Ontario, Canada
N3R 7K1

Phone: +1 519 754 2190

Fax: +1 519 757 1100

E-mail: info@olofsfors.com

Opening hours:

Mon-Fri 8am-5pm EST

Olofsfors GmbH

Address: Auf der Röte 1
DE-75397 Simmozheim
Germany

Phone: +49 (0) 7033 32043 10

E-mail: order.gmbh@olofsfors.de

Opening hours:

Mon-Fri 8am-5pm EST

Olofsfors South America

Address:

Phone: +55 11 97373 0201

E-mail: alex.lambert@olofsfors.com

Opening hours:

Mon-Fri 8am-5pm EST

Olofsfors LLC

Address: Shpalernaya street 54
K.B 191050 St: Petersburg
Russia

Phone: +7 921 790 33 03

E-mail: info.ru@olofsfors.com

Opening hours:

Monday-thursday 07:30-16:00 Local time

Metsätyö OY Jyväskylä

Address: Kiilatie 5
FI-40320 Jyväskylä
Finland

Phone: +358 14 338 8700

E-mail: info@metsatyo.fi

Opening hours:

Monday-thursday 08:00-17:00 Local time

Metsätyö OY Hämeenlinna

Address: Kiltintie 13
FI-13130 Hämeenlinna
Finland

Phone: +358 3 644 0400

E-mail: info@metsatyo.fi

Opening hours:

Monday-thursday 08:00-17:00 Local time

Metsätyö OY Rovaniemi

Address: Alakorkalontie 42
FI-96300 Rovaniemi
Finland

Phone: +358 16 321 0100

E-mail: info@metsatyo.fi

Opening hours:

Monday-thursday 08:00-16:00 Local time

Contacts

**Director of Sales***Australia, New Zealand***Kjell-Erik Åström**

Phone: +46 (0)930 397 10

Mob: +46 (0)70 323 97 10

E-mail: kjell-erik.astrom@olofsfors.se

**Regional Sales Manager***Sweden, Norway, Denmark, UK, Ireland, Eastern Europe, Spain, Portugal, South Africa***Jonas Persson**

Phone: +46 (0)930 396 18

Mob: +46 (0)70 658 00 99

E-mail: jonas.persson@olofsfors.se

**Regional Sales Manager***Sweden, Baltics, Asia, Italy, Czech Republic***Micael Olsson**

Phone: +46 (0)930 396 66

Mob: +46 (0)72 400 88 66

E-mail: micael.olsson@olofsfors.se

**Regional Sales Manager***Finland***Markku Sivelä**

Mob: +358 (0)406 546 023

E-mail: markku.sivela@metsatyo.fi

**Regional Sales Manager***Central Europe***Bernd Fuchslocher**

Phone: +49 (0)7033 32043 10

Mob: +49 (0)175 187 1355

E-mail: bernd.fuchslocher@olofsfors.de

**Regional Sales Manager***France***Marc Sieger**

Mob: +49 (0)152 54057138

E-mail: marc.sieger@olofsfors.de

**Regional Sales Manager
Forestry products***Russia, Belorussia and Ukraine***Anton Busygin**

Phone: +7 (0)812 956 5790

E-mail: anton.busygin@olofsfors.com

**Regional Sales Representative***South America***Alexandre Lambert**

Phone: +55 (0)11 97373 0202

E-mail: alex.lambert@olofsfors.com

**Regional Sales Manager***North America, USA***Gareth Robinson**

Phone: +1 (0)519 754 2179

Mob: +1 5 (0)19 732 4848

E-mail: garet.robinson@olofsfors.com

**Regional Sales Representative***Central U.S.***JD Moore**

Phone: +1 (0)519 754 2929

Mob: +1 (0)519 802 4668

E-mail: james.moore@olofsfors.com

**Regional Sales Representative***Pacific Northwest & Western Canada***D'Arcy Manson**

Phone: +1 (0)604 992 6400

E-mail: darcy.manson@olofsfors.com

**Regional Sales Representative***Atlantic, Québec, Northeast US***Derek LeBlanc**

Mob: +1 (0)506 261-1126

E-mail: derek.leblanc@olofsfors.com

Welding Instructions

THE STRUCTURE OF BORON STEEL

Hardened boron steel has a very high yield point of 1000 – 1200 [MPa] and has a high carbon equivalent, CEIIW (0.55), CET (0.41), which directly affects the risk of cold/hydrogen cracking.

COLD CRACKS

Cold cracks occur in areas adjacent to the welding bead at low temperatures when hydrogen (from moisture, rust and snow) accumulates in areas with high tension and “explodes” the steel, forming small cracks. This means that the piece to be welded must be preheated, and electrodes must be kept as dry and clean as possible. Electrodes from an opened package must be dried in a drying cabinet before use. In addition, the material to be welded must be clean and dry.

Rutile flux-cored wires must not be used since they capture hydrogen.

HOT CRACKS

Hot cracks/solidification cracks are accumulations of an alloying element and contaminants (carbon, sulphur and phosphorus), in the centre of the weld. Welding using a high amperage and a low welding speed can produce this type of cracking.

FATIGUE

Fatigue properties of a joint are improved by a smooth transition between the weld and the base material.

RECOMMENDATIONS

Extensive tests have been carried out at Olofsfors AB and we recommend that you follow the information below and attached weld data sheets for best results. In all cases, welding must only take place after snow, dirt and any rust has been removed from the material.

When welding cleats, the main weld must be along the length of the crossbar; no welding across the crossbar must take place.

Preheat the material according to the WPS. When welding in an environment where moisture can accumulate on the steel, the steel must always be heated first. The welding dimension is a4.

ESAB OK 67.45 is a stainless austenitic filler metal and can be welded without pre-heating if the crossbar is free from snow, dirt, moisture and warmer than the surrounding.


See WPS111PA02-03

ESAB OK 48.00 is a black filler metal and should be welded with the base material preheated to + 75 [°C] to avoid cold cracks.

See WPS111PA01-03

ESAB OK Autrod 12.50/12.51 represents the MAG method and must be welded with the base material preheated to about + 50 [°C] to avoid cold cracks.

See WPS135PA04-03

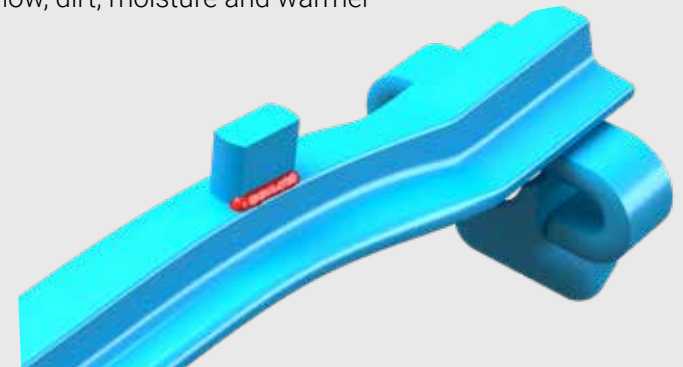


OBS! I det markerade området får inte broddsvetsas.
Note! Don't weld cleat in the marked area.
Huomio! Älä hitsaa telahokkeja punaisella merkatuilla alueilla!
Hinweis! Schweißplatte nicht im markierten Bereich schweißen.

Nota! Não solde grampos na área marcada.
Nota: No suelde tacos en las áreas marcadas.
Note! Ne pas souder le taquet dans la zone marquée.
Заметка! Не сваривайте шва в отмеченной области.

EX


Rekommenderad brodd
 Recommended cleat
 Suositeltava telahokki
 Empfohlen Stacheln
 Grampo recomendado
 Taco recomendado
 Taquet recommandé
 Рекомендуемая очистка
 Art.nr/Part no/Tuotenro/
 Статья: 022-415720 (1)
 Art.nr/Part no/Tuotenro/
 Статья: 022-483156 (2)

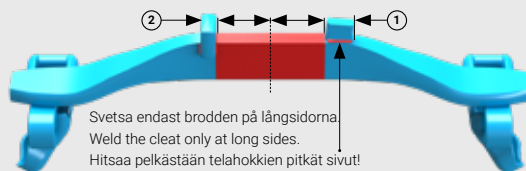

Svetsa endast brodden på långsidorna.
 Weld the cleat only at long sides.
 Hitsaa pelkästään telahokkien pitkät sivut!
 Schweißen Sie die Cleat nur an langen Seiten.
 Soldar o grampo apenas em lados longos.
 Suelde los tacos sólo por una de las caras largas.
 Souder le taquet seulement sur les côtés longs.
 Сварить клип только на длинных сторонах.

OF

Rekommenderad brodd
 Recommended cleat
 Suositeltava telahokki
 Empfohlen Stacheln
 Grampo recomendado
 Taco recomendado
 Taquet recommandé
 Рекомендуемая очистка
 Art.nr/Part no/Tuotenro/
 Статья: 022-488200

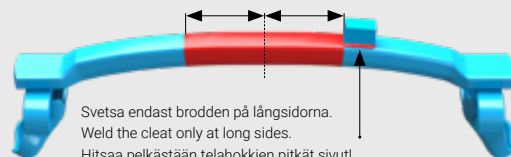


Svetsa endast brodden på långsidorna.
 Weld the cleat only at long sides.
 Hitsaa pelkästään telahokkien pitkät sivut!
 Schweißen Sie die Cleat nur an langen Seiten.
 Soldar o grampo apenas em lados longos.
 Suelde los tacos sólo por una de las caras largas.
 Souder le taquet seulement sur les côtés longs.
 Сварить клип только на длинных сторонах.

EVO

Rekommenderad brodd
 Recommended cleat
 Suositeltava telahokki
 Empfohlen Stacheln
 Grampo recomendado
 Taco recomendado
 Taquet recommandé
 Рекомендуемая очистка
 Art.nr/Part no/Tuotenro/
 Статья: 022-488205


Lätta band
 Light tracks
 Keveisiin koneisiin
 Leichte Bänder
 Lagartas leves
 Orugas ligeras
 Chenilles légères
 Легкие гусеницы
 Art.nr/Part no/Tuotenro/
 Статья: 022-488200

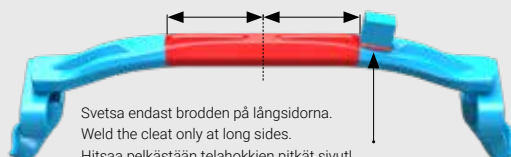

Svetsa endast brodden på långsidorna.
 Weld the cleat only at long sides.
 Hitsaa pelkästään telahokkien pitkät sivut!
 Schweißen Sie die Cleat nur an langen Seiten.
 Soldar o grampo apenas em lados longos.
 Suelde los tacos sólo por una de las caras largas.
 Souder le taquet seulement sur les côtés longs.
 Сварить клип только на длинных сторонах.

ECO

Rekommenderad brodd
 Recommended cleat
 Suositeltava telahokki
 Empfohlen Stacheln
 Grampo recomendado
 Taco recomendado
 Taquet recommandé
 Рекомендуемая очистка
 Art.nr/Part no/Tuotenro/
 Статья: 022-415720
 Art.nr/Part no/Tuotenro/
 Статья: 022-483155

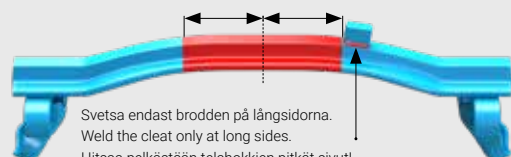


Svetsa endast brodden på långsidorna.
 Weld the cleat only at long sides.
 Hitsaa pelkästään telahokkien pitkät sivut!
 Schweißen Sie die Cleat nur an langen Seiten.
 Soldar o grampo apenas em lados longos.
 Suelde los tacos sólo por una de las caras largas.
 Souder le taquet seulement sur les côtés longs.
 Сварить клип только на длинных сторонах.

OBS! I det markerade området får inte broddsvetsas.
Note! Don't weld cleat in the marked area.
Huomio! Älä hitsaa telahokkeja punaisella merkatuilla alueilla!
Hinweis! Schweißplatte nicht im markierten Bereich schweißen.

Nota! Não solde grampos na área marcada.
Nota: No suelde tacos en las áreas marcadas.
Note! Ne pas souder le taquet dans la zone marquée.
Заметка! Не сваривайте шва в отмеченной области.

KOVAX


Rekommenderad brodd
 Recommended cleat
 Suositeltava telahokki
 Empfohlen Stacheln
 Grampo recomendado
 Taco recomendado
 Taquet recommandé
 Рекомендуемая очистка
 Art.nr/Part no/Tuotenro/
 Статья: 022-488205

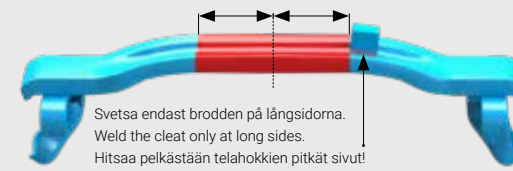

Svetsa endast brodden på långsidorna.
 Weld the cleat only at long sides.
 Hitsaa pelkästään telahokkien pitkät sivut!
 Schweißen Sie die Cleat nur an langen Seiten.
 Soldar o grampo apenas em lados longos.
 Suelde los tacos sólo por una de las caras largas.
 Souder le taquet seulement sur les côtés longs.
 Сварить клип только на длинных сторонах.

U


Rekommenderad brodd
 Recommended cleat
 Suositeltava telahokki
 Empfohlen Stacheln
 Grampo recomendado
 Taco recomendado
 Taquet recommandé
 Рекомендуемая очистка
 Art.nr/Part no/Tuotenro/
 Статья: 022-415710

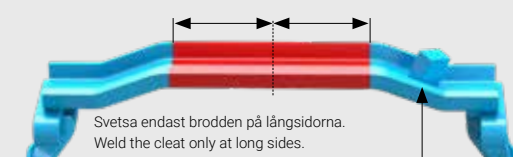

Svetsa endast brodden på långsidorna.
 Weld the cleat only at long sides.
 Hitsaa pelkästään telahokkien pitkät sivut!
 Schweißen Sie die Cleat nur an langen Seiten.
 Soldar o grampo apenas em lados longos.
 Suelde los tacos sólo por una de las caras largas.
 Souder le taquet seulement sur les côtés longs.
 Сварить клип только на длинных сторонах.

BALTIC


Rekommenderad brodd
 Recommended cleat
 Suositeltava telahokki
 Empfohlen Stacheln
 Grampo recomendado
 Taco recomendado
 Taquet recommandé
 Рекомендуемая очистка
 Art.nr/Part no/Tuotenro/
 Статья: 022-488205

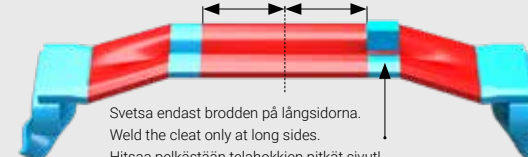

Svetsa endast brodden på långsidorna.
 Weld the cleat only at long sides.
 Hitsaa pelkästään telahokkien pitkät sivut!
 Schweißen Sie die Cleat nur an langen Seiten.
 Soldar o grampo apenas em lados longos.
 Suelde los tacos sólo por una de las caras largas.
 Souder le taquet seulement sur les côtés longs.
 Сварить клип только на длинных сторонах.

CoverX

Rekommenderad brodd
 Recommended cleat
 Suositeltava telahokki
 Empfohlen Stacheln
 Grampo recomendado
 Taco recomendado
 Taquet recommandé
 Рекомендуемая очистка
 Art.nr/Part no/Tuotenro/
 Статья: 022-488205

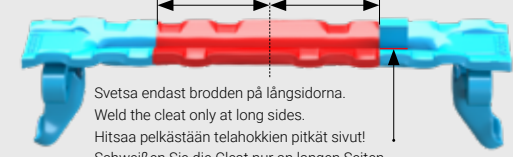




Svetsa endast brodden på långsidorna.
 Weld the cleat only at long sides.
 Hitsaa pelkästään telahokkien pitkät sivut!
 Schweißen Sie die Cleat nur an langen Seiten.
 Soldar o grampo apenas em lados longos.
 Suelde los tacos sólo por una de las caras largas.
 Souder le taquet seulement sur les côtés longs.
 Сварить клип только на длинных сторонах.


PLEASE NOTE!

**ALWAYS USE MAXIMUM TIRE PRESSURE,
RECOMMENDED BY THE TIRE MANUFACTURER**

Tires			
Dimension	Brand	Model	Max.pres.
600/50 x 22.5	Nokian	ELS L-2 (16)	4.3 bar/62 psi
	Nokian	TRS LS-2 (16)	4.3 bar/62 psi
	Trelleborg	T428 143/150	4.0 bar/58 psi
	Trelleborg	T428 149/156	5.0 bar/73 psi
650/45 x 22.5	Trelleborg	T422 150	5.0 bar/73 psi
700/45 x 22.5	Nokian	ELS L-2 (16)	3.9 bar/57 psi
	Nokian	TRS LS-2 (16)	3.9 bar/57 psi
710/40 x 22.5	Nokian	FK F	3.9 bar/57 psi
	Trelleborg	T428 145/152	4.0 bar/58 psi
	Trelleborg	T428 151/158	5.0 bar/73 psi
600/55 x 26.5	Nokian	ELS L-2 (16)	4.6 bar/67 psi
	Nokian	ELS L-2 (20)	5.5 bar/80 psi
	Nokian	TRS LS-2 (16)	4.6 bar/67 psi
	Nokian	FK F (16)	4.6 bar/67 psi
	Nokian	FK F (20)	5.5 bar/80 psi
	Trelleborg	T428 160/167	6.0 bar/87 psi
	Trelleborg	T422 154/161	5.0 bar/73 psi
	Firestone	Forestry EL	3.9 bar/56 psi
	Nokian	TRS 2 (20)	5.5 bar/80 psi
	Trelleborg	T440	6.0 bar/87 psi
	Trelleborg	T480	6.0 bar/87 psi
620/55 x 30.5	Trelleborg	T428 158/165	5.0 bar/73 psi
650/65 x 26.5	Nokian	ELS L-2	5.5 bar/80 psi
650/60 x 26.5	Trelleborg	T428 161/168	5.0 bar/73 psi
700/50 x 26.5	Nokian	ELS L-2 (16)	4.6 bar/67 psi
	Nokian	ELS L-2 (20)	5.5 bar/80 psi
	Nokian	TRS LS-2 (16)	4.6 bar/67 psi
	Nokian	TRS LS-2 (20)	5.5 bar/80 psi
	Trelleborg	T423	5.0 bar/73 psi
	Firestone	Forestry EL	4.6 bar/66 psi
710/40 x 24.5	Trelleborg	T440	6.0 bar/87 psi
	Trelleborg	T480	6.0 bar/87 psi
	Firestone	Forestry EL	5.0 bar/73 psi


Tires			
Dimension	Brand	Model	Max.pres.
710/45 x 26.5	Nokian	FK F (16)	4.6 bar/67 psi
	Nokian	FK F (20)	5.5 bar/80 psi
	Trelleborg	T428 151/158	4.5 bar/65 psi
	Trelleborg	T428 163/170	6.0 bar/87 psi
	Nokian	TRS 2 (20)	5.5 bar/80 psi
	Nokian	F2 (20)	5.5 bar/80 psi
	Nokian	F2 (24)	6.0 bar/87 psi
	Trelleborg	T440	6.0 bar/87 psi
	Trelleborg	T480 (20)	6.0 bar/87 psi
	Trelleborg	T480 (24)	6.0 bar/87 psi
	Firestone	Forestry EL	5.0 bar/73 psi
710/55 x 28.5	Nokian	F2 (24)	6.0 bar/87 psi
750/50 x 26.5	Trelleborg	T428 163/170	5.0 bar/73 psi
	Nokian	T428 170/177	6.0 bar/87 psi
	Nokian	FK F (20)	5.5 bar/80 psi
	Trelleborg	T428 160/167	6.0 bar/87 psi
	Trelleborg	T422 154/161	5.0 bar/73 psi
	Firestone	Forestry EL	3.9 bar/56 psi
	Nokian	TRS 2 (20)	5.5 bar/80 psi
	Trelleborg	T440	6.0 bar/87 psi
	Trelleborg	T480	6.0 bar/87 psi
700/50 x 30.5	Trelleborg	T423	5.0 bar/73 psi
750/55 x 26.5	Nokian	ELS L-2 (20)	5.5 bar/80 psi
	Nokian	TRS L-2 (20)	5.5 bar/80 psi
	Nokian	FK F (20)	5.5 bar/80 psi
	Nokian	FK F2 (24)	6.0 bar/87 psi
	Trelleborg	T480	6.0 bar/87 psi
750/45 x 30.5	Trelleborg	T428 169/176	6.0 bar/87 psi
780/50 x 28.5	Nokian	F2 (24)	6.0 bar/87 psi
	Trelleborg	T480	6.0 bar/87 psi
780/55 x 26.5	Trelleborg	T480	6.0 bar/87 psi
800/40 x 26.5	Nokian	FK F (20)	5.0 bar/73 psi
	Trelleborg	T423	5.0 bar/73 psi

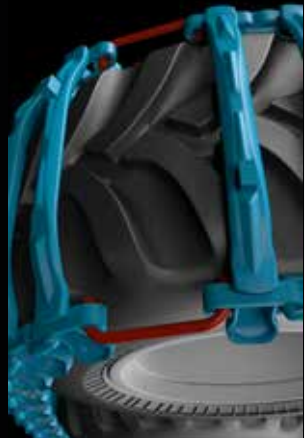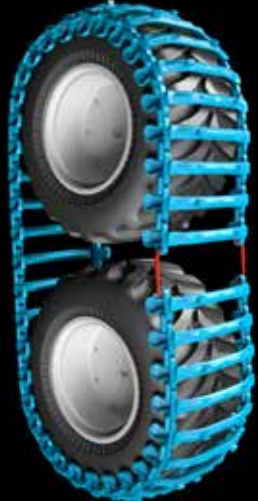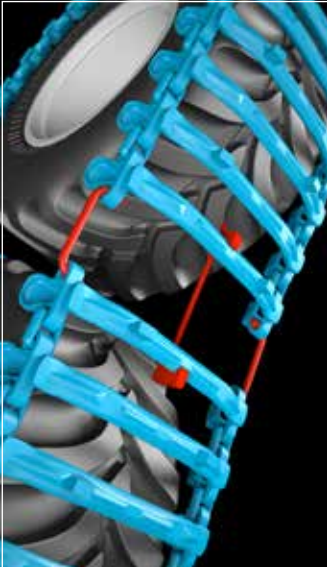	1 Unroll the track parts and screw them together with large track lock. Drive over the track on the bogie using straps/small chain.
	2 When the track is on the bogie make sure that the ends are at one end of the bogie.
	3 Mount the two clamps from the outside into the link hooks.
	4 Drive slowly forward until the clamps are between the bogie wheels. NOTE: If the tires are new, it helps moisten them, if you moisten them. It may also be needed to help push up the track from the short edge towards the top.
	5 Mounting tool – tensioner – with screw.
	6 Mount the installation tool on the cross members from below. Make sure that it is in the middle. Then use a ratchet shaft screwing together the stretcher with. Don't pull harder than necessary. Pay attention so as not the cross member turns.

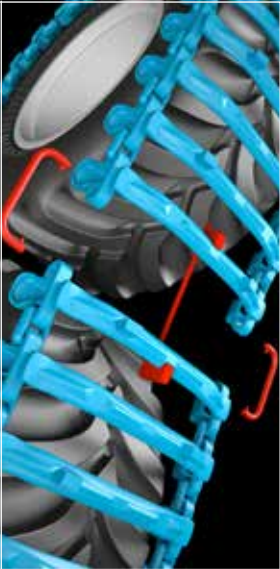	7 When the clamps are loose, remove them from the track.																						
	8 Tighten the track until you can install the track lock.																						
	9 Mount the track lock plate.																						
	10 Mount the bolt from above because of the risk of damage the nut during driving.																						
	11 Take out the tool. The proper tensioning of the track is when slack between tires is max. 50 mm.																						
<table border="0"> <tr> <td>Part.no</td><td>Track Model</td></tr> <tr> <td>036-468510</td><td>ECO</td></tr> <tr> <td>036-468511</td><td>OF</td></tr> <tr> <td>036-468513</td><td>U</td></tr> <tr> <td>036-468514</td><td>BALTIC</td></tr> <tr> <td>036-468518</td><td>EVO</td></tr> <tr> <td>036-490740</td><td>EX</td></tr> <tr> <td>036-468250</td><td>KOVAX</td></tr> <tr> <td>036-468260</td><td>COVERX</td></tr> <tr> <td>036-468270</td><td>COVERX M</td></tr> <tr> <td>035-470130</td><td>SPARE U CLAMP</td></tr> </table> 		Part.no	Track Model	036-468510	ECO	036-468511	OF	036-468513	U	036-468514	BALTIC	036-468518	EVO	036-490740	EX	036-468250	KOVAX	036-468260	COVERX	036-468270	COVERX M	035-470130	SPARE U CLAMP
Part.no	Track Model																						
036-468510	ECO																						
036-468511	OF																						
036-468513	U																						
036-468514	BALTIC																						
036-468518	EVO																						
036-490740	EX																						
036-468250	KOVAX																						
036-468260	COVERX																						
036-468270	COVERX M																						
035-470130	SPARE U CLAMP																						


Tracks Shortening Instructions

To always insure that your Eco-Tracks have the right tension, we provide an easy solution to shorten your tracks. Natural wear will cause any bogie tracks to loosen, however shortening the tracks will increase the lifespan and capacity of your product.

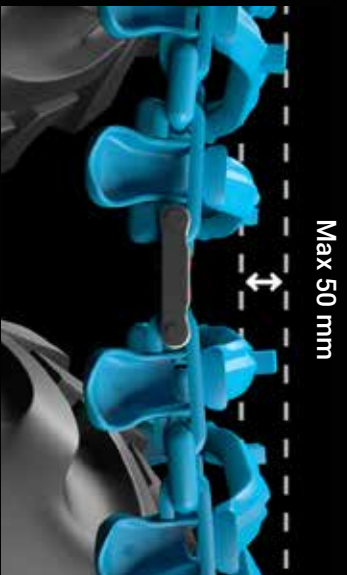


Example 294-644421 EVO-Soft 710 x 26.5"


STEP 1

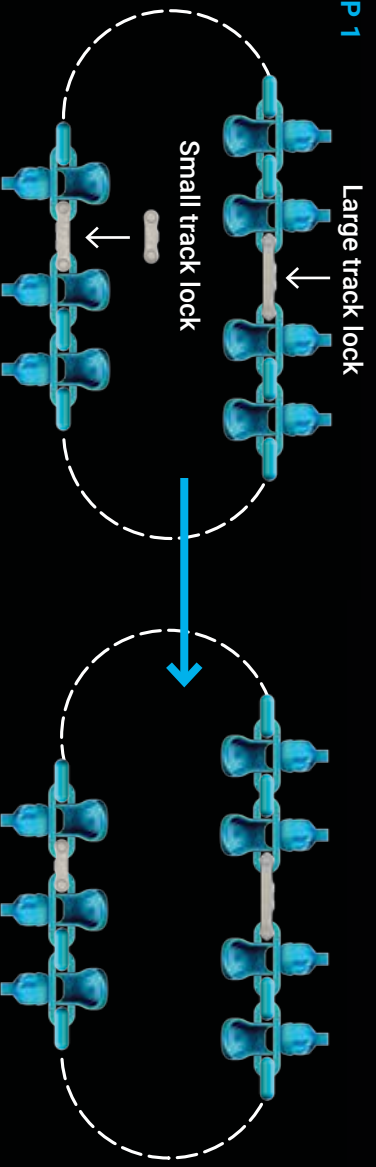


STEP 2

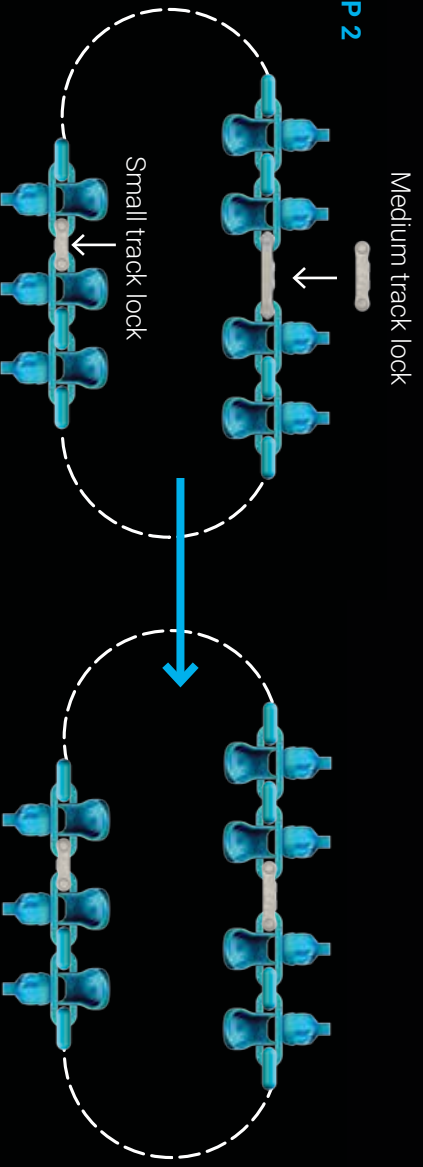

STEP 3

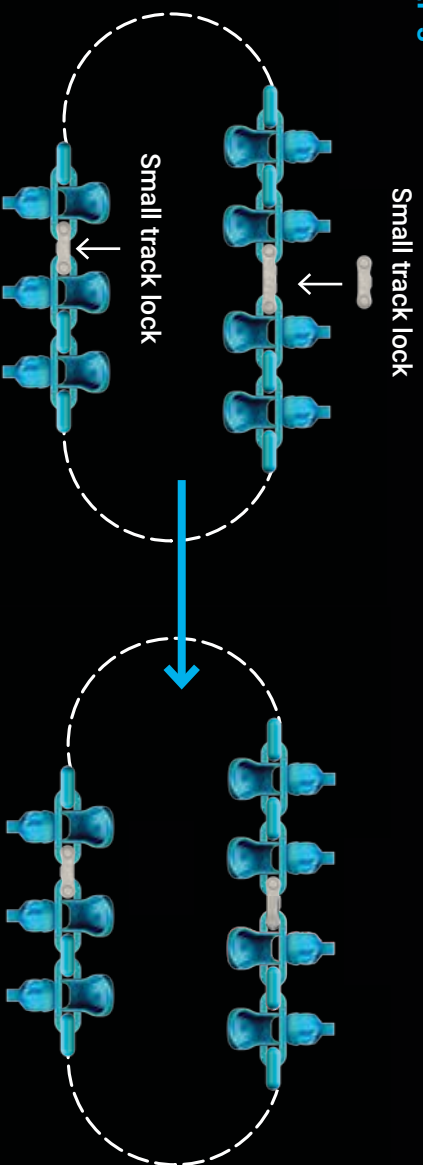

STEP 4

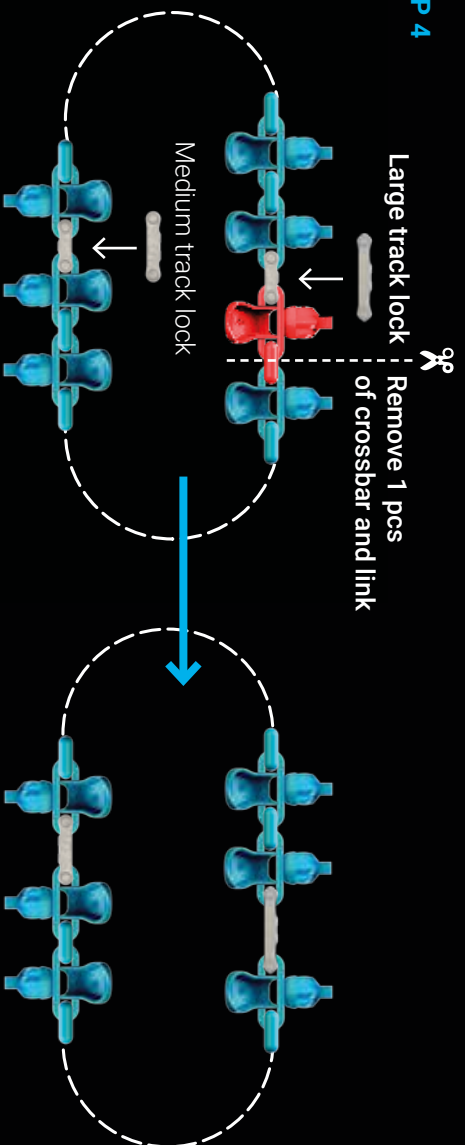

IF FURTHER SHORTENING IS
REQUIRED REPEAT STEP 1-4



Manufacturing

Olofsfors AB has the world's most modern and efficient tracks-production, fully automated with over 25 robots.

The tracks are made from carbon manganese steel, alloyed with boron by a special metallurgical treatment. The steel has good welding properties and wear characteristics.

Our cross members is manufactured from scrap-based steel.

Scrap-based manufacturing generates lower carbon dioxide emissions than steel production using iron ore. Through effective scrap management, we also preserve the alloying substances contained in the scrap, thus reducing the need to add additional alloy, which leads to both economic and environmental gains.

All our tracks are heat treated after the welding process which gives higher quality.

Quality

We have been ISO 9001 certified since 1997 and our quality objectives are well supported by each department of the company.

Environment

We have been environmentally-certified in accordance with ISO 14001 certified since September 2002. Personnel are trained and continuously prompted to carry out their own tasks in an environmentally responsible manner.

The raw material we use for the tracks, are scrap based(recycled).

The climate declaration of scrap based material, shows the emissions of greenhouse gases, expressed as CO equivalents, is less than 500 kg CO₂ per 1000 kg produced hot rolled material.

Its more than half as much, as if we should use ore based raw material.

All our tracks are possible to recycle.



Olofsfors AB is the world leader in tracks for rubber tyre forestry machines.

It is important to constantly put the customer in focus, be responsive. Produce and develop what the market wants.

Olofsfors has the most complete range of tracks on the market with continued development of new track products. Bogie Tracks and Wheel Tracks for forwarders, harvesters, skidders and other rubber tired machines. We also sell tyre chains for harvesters and forwarders. The use of tracks significantly reduces ground damage in the forest while also improving machine performance and protecting tires.



www.olofsfors.com